

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

Detailed product Description:


1. Waterproof connector rating is IP65/IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc

Electrical character:

1. Rating voltage: 60V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 3A
4. Contact resistance of the connector ≤10 mΩ

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF
4. Degree of protection: IP65/67
5. Operating temperature: -25℃~+85℃

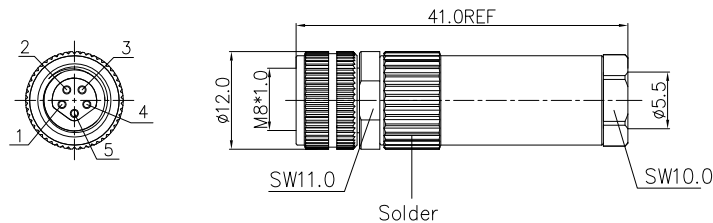

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance	Cable OD (mm)
		A/C	D/C			
PASH-M8A-03P-FF-SL7001-00B(H)		60V	60V	3A	10mΩ	3.0~5.5
PASH-M8A-04P-FF-SL7001-00B(H)		30V	30V	3A	10mΩ	3.0~5.5
PASH-M8B-05P-FF-SL7001-00B(H)		30V	30V	3A	10mΩ	3.0~5.5
PASH-M8A-06P-FF-SL7001-00B(H)		30V	30V	1.5A	10mΩ	3.0~5.5
PASH-M8A-08P-FF-SL7001-00B(H)		30V	30V	1.5A	10mΩ	3.0~5.5

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alam 7/10/16"	NAME: PASH-M8X-XXP-FF-SL7001-00B(H)		
	CHKD: Aaron 6/2/16"	TITLE: CUSTOMER DRAWING		
	DRFT: CKZ 1/11/16"	REV	DO	
	 THIRD ANGLE PROJECTION	DRAWING NO.: SM8-PVC-A3F-1B10	SHEET	1/1
	MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1	