

LogiLink®



USB-C™ to VGA Multiport Adapter

Art. No.: UA0260

The USB-C™ to VGA Multiport Adapter lets you connect your MacBook or Chromebook with a USB-C™ port to a VGA display, while also connecting a standard USB device and a USB-C™ charging cable.

This Adapter allows you to mirror your MacBook display to your VGA-enabled TV or projector up to 1080p HD; it also outputs video content like movies and captured video.


Simply connect the adapter to the USB-C™ port on your MacBook or Chromebook and to your TV or projector via a VGA cable.

Use the standard USB port to connect devices such as your flash drive or camera or a USB cable for syncing and charging your smartphones.

You can also connect a charging cable to the USB-C™ port to charge your MacBook or Chromebook.

Features:

- » Support USB-C™ input and VGA, & USB output
- » Supports DisplayPort 1.2 Alt-mode
- » Supports USB 3.1 Gen1 super speed (5 Gbps) transmission, downward compatible with USB 2.0
- » USB A port supports simultaneous charging and transmission of data for USB devices
- » Supports VGA resolution up to 1920 x 1200 @60Hz
- » Supports both video and audio output
- » USB-C female port supports USB Power Delivery Profile 4 up to 60W (20V/3A)
- » Supports simultaneous charging to your MacBook or Google Chromebook, or any other USB-C™ supported devices
- » Easy to use and carry

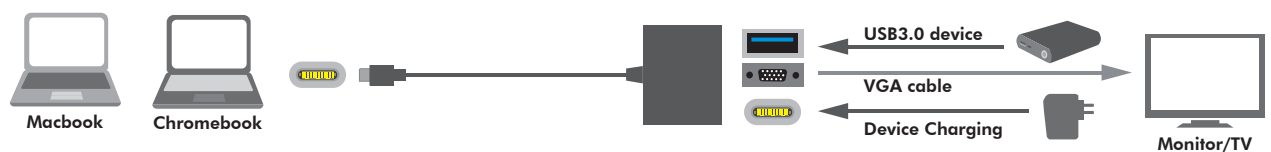

UA0260



Made in China



RoHS
compliant



*Specifications are subject to change without prior notice.

*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.

*All trade names referenced are the registered trademark of their respective owners.

LogiLink®



USB-C™ to VGA Multiport Adapter

Art. No.: UA0260

Specification:

| | |
|-----------------------------|---|
| Input | 1x USB-C™ Male 1x USB-C™ Female for charging |
| Output | 1x VGA Female 1x USB A Female |
| VGA Resolutions | Up to 1920 x 1200 @60Hz |
| USB A Port | USB 3.1 Gen1 Super Speed up to 5 Gbps |
| VGA per Lane Data Rates | 5.4 Gbps (HBR2), 2.7 Gbps (HBR) and 1.62 Gbps (RBR) |
| USB-C™ Standard | USB 3.1 Gen1 (Thunderbolt™ 3 compatible) |
| Operating Temperature | 0°C - 45°C |
| Operating Humidity | 10 - 85% RH (no condensation) |
| Storage Temperature | -10°C - 70°C |
| Storage Humidity | 5 - 90% RH (no condensation) |
| USB A female Port | Up to 5W (5V/1A) |
| USB-C™ Female Charging Port | USB PD Profile 4 Source up to 60W (20V/3A) |
| Product Dimension | 80,1 x 40,1 x 14,6 mm |
| Product Weight | 40g |
| Cable Length | 14 cm |

Compatible Devices:

| | |
|---------|--|
| Apple | 2015 MacBook 2016 MacBook 2016 MacBook Pro |
| Dell | XPS 13 |
| Google | Chromebook Pixel |
| HP | Elite x2 1012 G1 Pro Tablet 608 |
| Samsung | 900X5L-K01 |



Package Contents:

- » 1x USB-C™ to VGA Multiport Adapter
- » 1x User Manual

Package Informations:

- » Packing Dimension: 173 x 163 x 25mm
- » Packing Weight: 0.09kg
- » Carton Dimension: 520 x 366 x 185mm
- » Carton Q'ty: 40pcs
- » Carton Weight: 4.7kg



UA0260



Made in China



RoHS
compliant



*Specifications are subject to change without prior notice.

*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.

*All trade names referenced are the registered network of their respective owners.

Best Connectivity