




Miniature Sized, Low Impedance,  
High Reliability For  
Switching Power Supplies




- Smaller case size and Long Life product.
- Compliant to the RoHS directive (2011/65/EU).

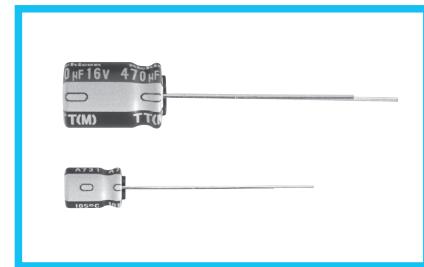

### ■ Specifications

Item	Performance Characteristics																											
Category Temperature Range	-40 to +105°C																											
Rated Voltage Range	6.3 to 50V																											
Rated Capacitance Range	1 to 470μF																											
Capacitance Tolerance	±20% at 120Hz, 20°C																											
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is less than 0.03CV or 3 (μA), whichever is greater.																											
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.30</td> <td>0.28</td> <td>0.24</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	tan δ (MAX.)	0.30	0.28	0.24	0.18	0.16	0.14							
Rated voltage (V)	6.3	10	16	25	35	50																						
tan δ (MAX.)	0.30	0.28	0.24	0.18	0.16	0.14																						
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-40°C / Z+20°C</td> <td>10</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio Z-25°C / Z+20°C	5	4	3	3	3	3	ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	10	8	6	4	4
Rated voltage (V)	6.3	10	16	25	35	50																						
Impedance ratio Z-25°C / Z+20°C	5	4	3	3	3	3																						
ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	10	8	6	4	4																						
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±30% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>							Capacitance change	Within ±30% of the initial capacitance value	tan δ	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value															
Capacitance change	Within ±30% of the initial capacitance value																											
tan δ	300% or less than the initial specified value																											
Leakage current	Less than or equal to the initial specified value																											
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																											
Marking	Printed with white color letter on dark blown sleeve.																											


### ■ Radial Lead Type

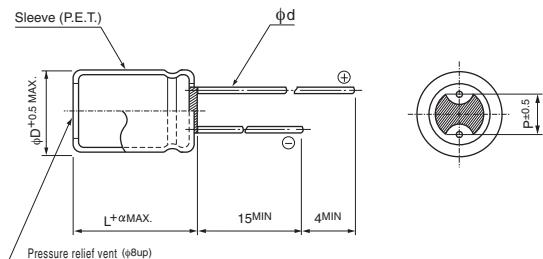

α	(mm)				
	φD	4	5	6.3	
	P	1.5	2.0	2.5	
	φd	0.45	0.45	0.5 (0.45)	0.6

( ) : Applied to 7mmL products

### Type numbering system (Example : 25V 100μF)

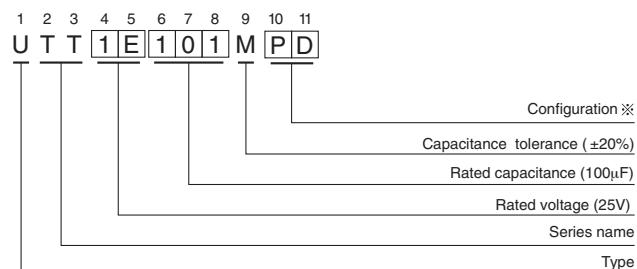

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4 to 6.3	DD
8	PD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

**UTT**

## ■Dimensions

Cap.( $\mu$ F)	V (Code)	6.3 (0J)			10 (1A)			16 (1C)			
		Item Code	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mArms) 105°C / 100kHz
10	100								4 × 7	7.4	46
22	220	4 × 7	7.4	46					5 × 7	4.0	74
33	330				5 × 7	4.0	74				
47	470	5 × 7	4.0	74					6.3 × 7	2.1	120
100	101	6.3 × 7	2.1	120					6.3 × 9	1.1	163
150	151				6.3 × 9	1.1	163		8 × 9	0.68	230
220	221	6.3 × 9	1.1	163	8 × 9	0.68	230		8 × 9	0.68	230
330	331	8 × 9	0.68	230					8 × 9	0.68	230
470	471	8 × 9	0.68	230					8 × 11.5	0.40	298

Cap.( $\mu$ F)	V (Code)	25 (1E)			35 (1V)			50 (1H)			
		Item Code	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mAarms) 105°C / 100kHz	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mAarms) 105°C / 100kHz	Case size $\phi D \times L$ (mm)	Impedance ( $\Omega$ ) MAX. 20°C / 100kHz	Rated ripple (mAarms) 105°C / 100kHz
1	010								4 × 7	30	23
2.2	2R2								4 × 7	23	26
3.3	3R3								4 × 7	20	29
4.7	4R7				4 × 7	7.4	37		5 × 7	14	37
10	100				5 × 7	4.0	74		6.3 × 7	4.4	84
22	220	5 × 7	4.0	74	6.3 × 7	2.1	120		6.3 × 9	2.4	112
33	330	6.3 × 7	2.1	120	6.3 × 9	1.1	163				
47	470	6.3 × 9	1.1	163	6.3 × 9	1.1	163		8 × 9	1.4	162
100	101	8 × 9	0.68	230							
150	151										
220	221	8 × 11.5	0.40	298							
330	331	8 × 11.5	0.40	298							

## ●Frequency coefficient of rated ripple current

Cap. ( $\mu$ F)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz or more
1 to 4.7		0.25	0.30	0.50	0.70	0.90	1.00
10 to 47		0.30	0.40	0.60	0.75	0.90	1.00
100 to 470		0.60	0.60	0.70	0.80	0.90	1.00

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Capacitors Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[NRC10F5600TRF](#) [BFK3200A230](#) [KC16-11](#) [KC25-11](#) [DE1-D20K11 P7](#) [DE1-D25K11 P7](#) [DE1-D40K12 P7](#) [DE1-D60K12 P7](#)  
[UTT1C100MDD](#) [UVR1HR22MDD6TP](#) [UVR1H4R7MDD6TP](#) [UVR1H2R2MDD6TP](#) [UVR1A220MDD6TP](#) [UVR0J330MDD6TP](#)  
[UVR0J220MDD6TP](#) [URZ1J220MDD1TD](#) [UCY2W6R8MPD1TD](#) [UCY2G680MHD3TN](#) [UKW2A100MED1TD](#) [UPA1C222MHD3TO](#)  
[URZ0J470MDD1TD](#) [URZ1C220MDD1TD](#) [URZ1E4R7MDD1TD](#) [URZ1H4R7MDD1TD](#) [URZ1J330MPD1TD](#) [URZ1V330MDD1TD](#)  
[11BF65K00230](#) [11G460](#) [11BF50K00230](#) [11BF80K00230](#) [11G464](#) [UVR0J101MDD6TP](#) [UVR0J470MDD6TP](#) [UVR1A330MDD6TP](#)  
[UVR1C330MDD6TP](#) [UVR1E220MDD6TP](#) [UVR1E330MDD6TP](#) [UVR1H3R3MDD6TP](#) [UVR1HR47MDD6TP](#) [UVR1V4R7MDD6TP](#) [ECE-A1EKS100](#)  
[300R102U010GE2E](#) [UVR0J221MDD1TA](#) [UPB2G100MPD1TD](#) [UPM1H560MED1CA](#) [UPW1J4R7MDD1TA](#) [URY2W100MHD](#)  
[UVK2GR47MED1TD](#) [ECA-2DHG100B](#) [ECE-A1AKS221I](#)