



**Art No. WL0104**


## Pigtail Cable, 500mm

**Specification:**

Frequency range	DC~6 GHz
VSWR	1.5:1 Max. @DC~6.0 GHz
Insertion loss	0.6 dB Max. @ DC~3 GHz 0.8 Db Max. @ 3~6.0 GHz
Impedance	50 Ω
Connector	N PLUG / Reverse SMA PLUG
Cable	CFD200
Cable Length	500mm
Temperature	-40°C to +85°C


**Typical Attenuation-(nom.)**

Frequency (MHz)	Attenuation (dB)
30	5.8
50	7.5
150	13.1
220	15.9
450	22.8
900	32.6
1500	42.4
2000	49.3
2500	55.4
5800	86.5

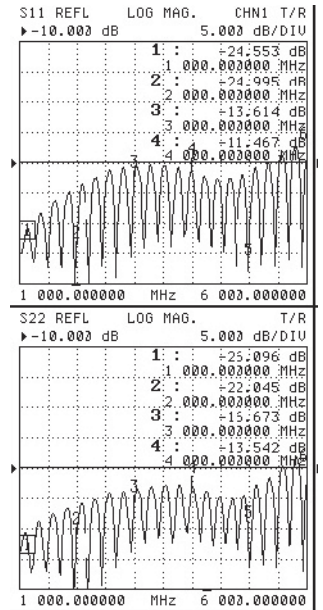

**Packaging Information:**

- Packing Dimension: 185x245 mm
- Packing Weight: 0.05kg
- Carton Dimension: 590x260x275 mm
- Carton Q'ty: 200pcs
- Carton Weight: 10.64kgs



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered network of their respective owners.

