



**Model**

**ESPE-MOSO 1212-2555-H-PRO**

Output		
Voltage	Current	Power
<b>12V</b>	<b>1A</b>	<b>12W</b>
<b>Residual voltage &lt; 11VAC</b>		
CE		
EMC	2014/30/EU	
LVD	2014/35/EU EN 60950-1:2006+A11+A12+A2	
M.T.B.F.		
50.000 h Calculated Hours at 25°C		

**Output Characteristics:**

Voltage	Min. Load	Rated. Load	peak Load	Output Power
12Vdc	0.00A	1A	1.3A (30sec)	12W

**Combined Load/Line Regulation**

Voltage	Min. Load	Rated. Load	Line Regulation	Load Regulation
12Vdc	0.00A	1A	+/- 3%	+/-5%

**Ripple and Noise (Max.)**

<120mV p-p

**Efficiency:**

Energy Star Compliance: Level V 77,76%

**Standby Power**




0.3W max

**Protection Function**

Short circuit protection / Over current protection / Over load protection

**Input Characteristics:**

Voltage	Faranquency	Current	Inrush Current	Ac Leakage Current
100-240 Vac	50/60Hz	0.5Amps	60 Amps Max.	0.25mA Max. At 264Vac

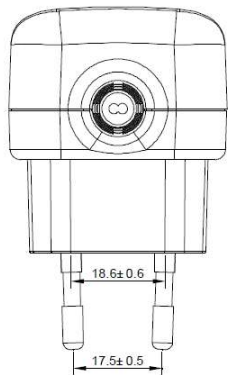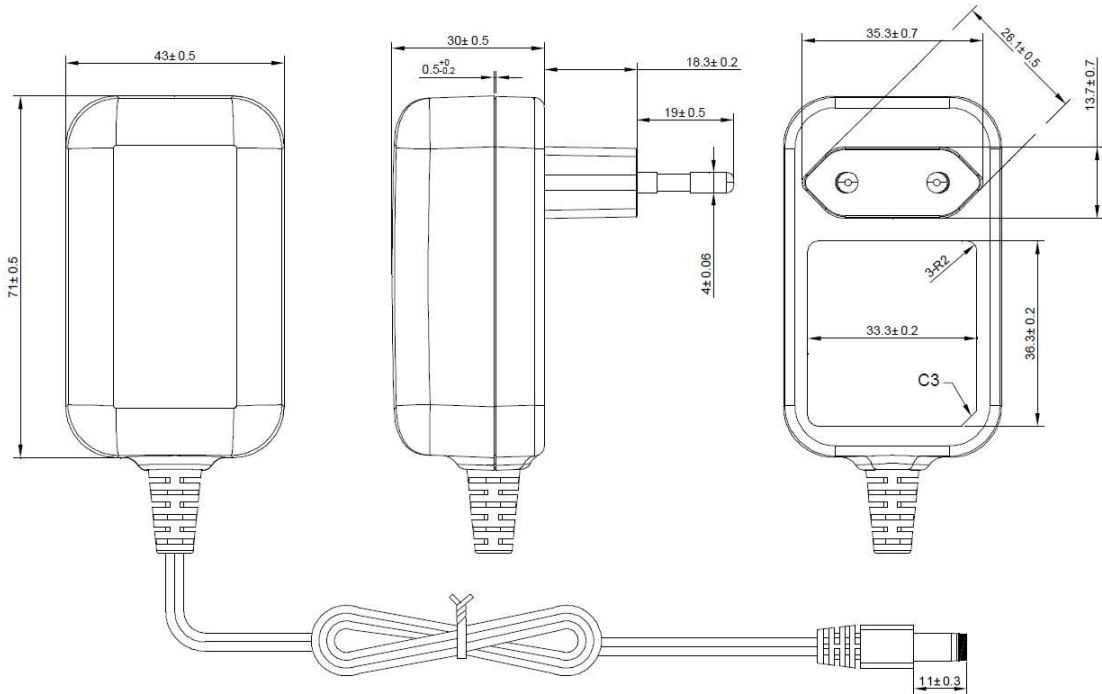

Unit:mm  
Other tolerance:  $\pm 0.2$