







Model
ESPE 12024 P3-2555

| Output | | |
|-----------------------------------|--|-------------|
| Voltage | Current | Power |
| 24V | 5A | 120W |
| CE | | |
| EMC | 2014/30/EU | |
| LVD | 2014/35/EU EN 60950-1:2006+A11+A1+A12+A2 | |
| M.T.B.F. | | |
| 50.000 h Calculated Hours at 25°C | | |

| Output Characteristics: | | | | |
|---|-----------|-------------|-----------------|-----------------|
| Voltage | Min. Load | Rated. Load | peak Load | Output Power |
| 24Vdc | 0.00A | 5A | 5.5A (30sec) | 120W |
| Combined Load/Line Regulation | | | | |
| Voltage | Min. Load | Rated. Load | Line Regulation | Load Regulation |
| 24Vdc | 0.00A | 5A | +/- 3% | +/-5% |
| Ripple and Noise (Max.) | | | | |
| <300mV p-p | | | | |
| Efficiency: | | | | |
| Energy Star Compliance: Level VI 89% | | | | |
| Standby Power | | | | |
| 0.15W max | | | | |
| Protection Function | | | | |
| Short circuit protection / Over current protection / Over load protection | | | | |

| Input Characteristics: | | | | |
|------------------------|-------------|---------|----------------|-----------------------|
| Voltage | Faranquency | Current | Inrush Current | Ac Leakkage Current |
| 100-240 Vac | 50/60Hz | 1.6Amps | 80 Amps Max. | 0.75mA Max. At 264Vac |

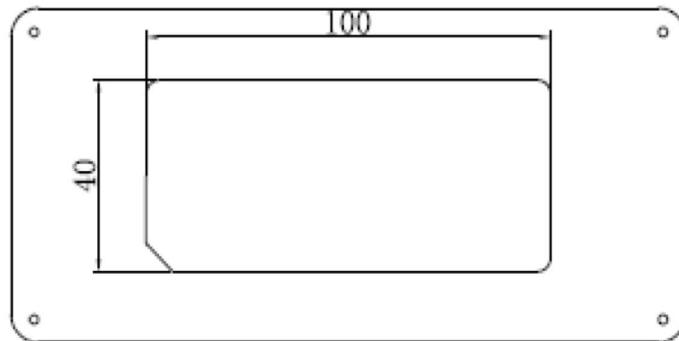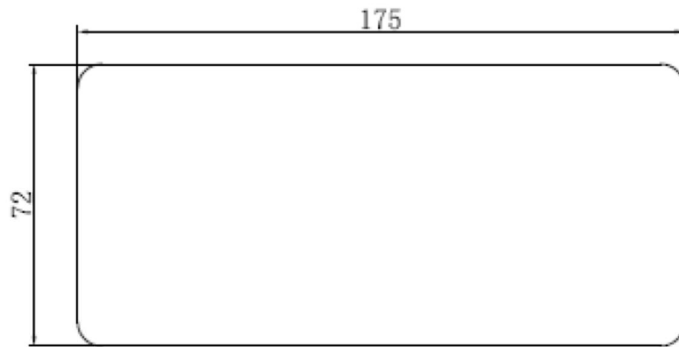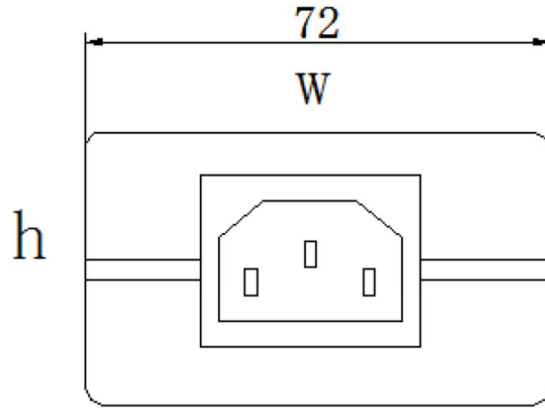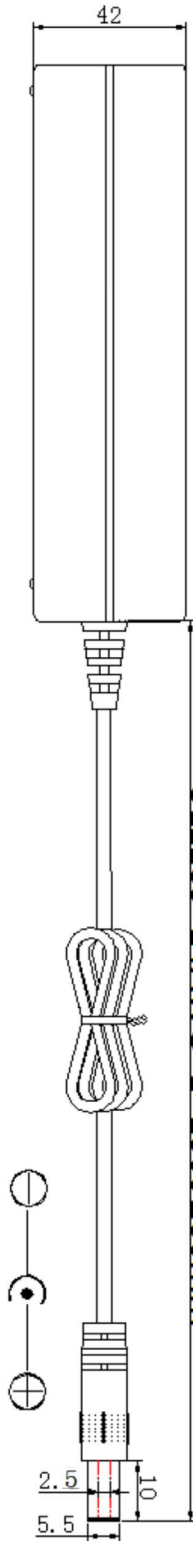

| Model | Optional DC plug |
|--------------------|------------------------|
| ESPE 12024-P3-0723 | 0.7x2.35mm |
| ESPE 12024-P3-1130 | 1.1x3.0mm |
| ESPE 12024-P3-1135 | 1.1x3.5mm |
| ESPE 12024-P3-1335 | 1.3x3.5mm |
| ESPE 12024-P3-1740 | 1.7x4.0mm |
| ESPE 12024-P3-1755 | 1.7x5.5mm |
| ESPE 12024-P3-2555 | 2.5x5.5mm |
| ESPE 12024-P3-3055 | 3.0x5.5mm - center pin |