



(2,00mm) .0787"

CLT SERIES

CLT-115-02-F-D-A-K-BE



CLT-105-02-F-D



CLT-125-02-L-D

LOW PROFILE DUAL WIPE SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?CLT

Insulator Material: Black Liquid Crystal Polymer



Contact Material: Phosphor Bronze
Plating: Sn or Au over 50µ" (1,27µm) Ni
Current Rating: 3.3A @ 80°C ambient (6 contacts powered)

Operating Temp Range: -55°C to +125°C
Contact Resistance: 10 mΩ max

Insertion Depth: Top Entry= (1,40mm) .055" minimum
 Bottom Entry= (2,57mm) .101" minimum (add board thickness for correct post OAL)


Insertion Force: (Single contact only) 1.8oz (0,50N) avg.
Withdrawal Force: (Single contact only) .6oz (0,17N) avg.
Max Cycles: 100 with 10µ" (0,25µm) Au
RoHS Compliant: Yes

Processing: Lead-Free Solderable: Yes
SMT Lead Coplanarity: (0,10mm) .004" max (02-25) (0,15mm) .006" max (26-34) (0,20mm) .008" max (35-50)

Mates with: TMM, TMMH, MTMM, MMT, TW




Available with optional Pick & Place Pads

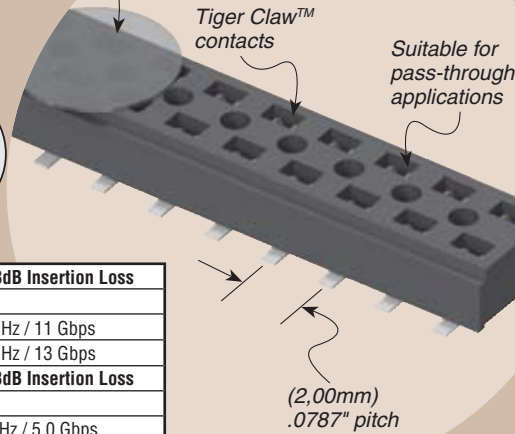

TMMH/CLT	Rated @ 3dB Insertion Loss
4,77mm Stack Height	
Single-Ended Signaling	5.5 GHz / 11 Gbps
Differential Pair Signaling	6.5 GHz / 13 Gbps
TW/CLT	Rated @ 3dB Insertion Loss
18mm Stack Height	
Single-Ended Signaling	2.5 GHz / 5.0 Gbps
Differential Pair Signaling	3.0 GHz / 6.0 Gbps

Complete test data available at www.samtec.com?CLT or contact sig@samtec.com



CLT - 1 NO. PINS PER ROW - LEAD STYLE - PLATING OPTION - D - OTHER OPTIONS

02 thru 50

- 01 = Through-hole
- 02 = Surface Mount
- 03 = Through-hole


- F = Gold flash on contact, Matte Tin on tail
- L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail
- G = 10µ" (0,25µm) Gold on contact, Gold flash on tail

- All options require Style -02
- BE = Bottom Entry (Required for bottom entry applications)
 - A = Alignment Pin (3 positions minimum) Metal or plastic at Samtec's discretion
 - K = (5,00mm) .197" DIA Polyimide Film Pick & Place Pad (04 thru 50 only)
 - P = Pick & Place Pad (4 positions minimum) (Not always necessary for auto placement.)
 - TR = Tape & Reel Packaging (36 positions max)

LEAD STYLE	A
-01	(2,16) .085
-03	(2,95) .116

TAPE & REEL AVAILABILITY
 No tooling charges.
 Minimum order is the lesser of a full reel quantity or 125 pieces.
 Order any quantity above minimum. In-house design, manufacture. Quick turn-around.
 Call Samtec for specifications and ordering information.

Note: Other Gold plating options available. Contact Samtec.
Note: Some lengths, styles and options are non-standard, non-returnable.

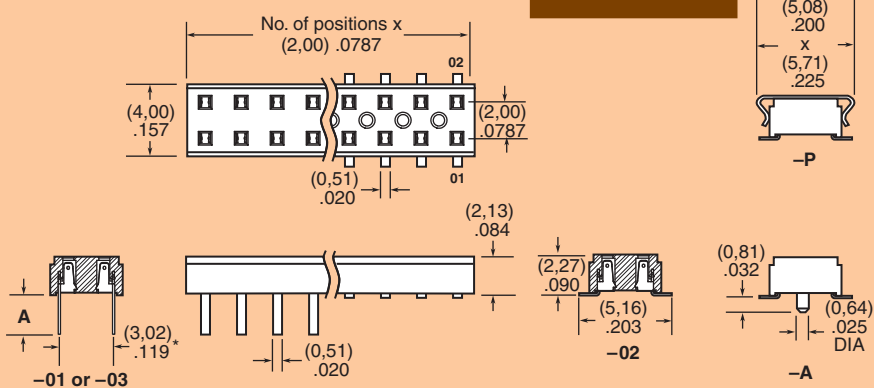

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)