



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
AD		39		P	LTR	DESCRIPTION	DATE	DWN	APVD
				H2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

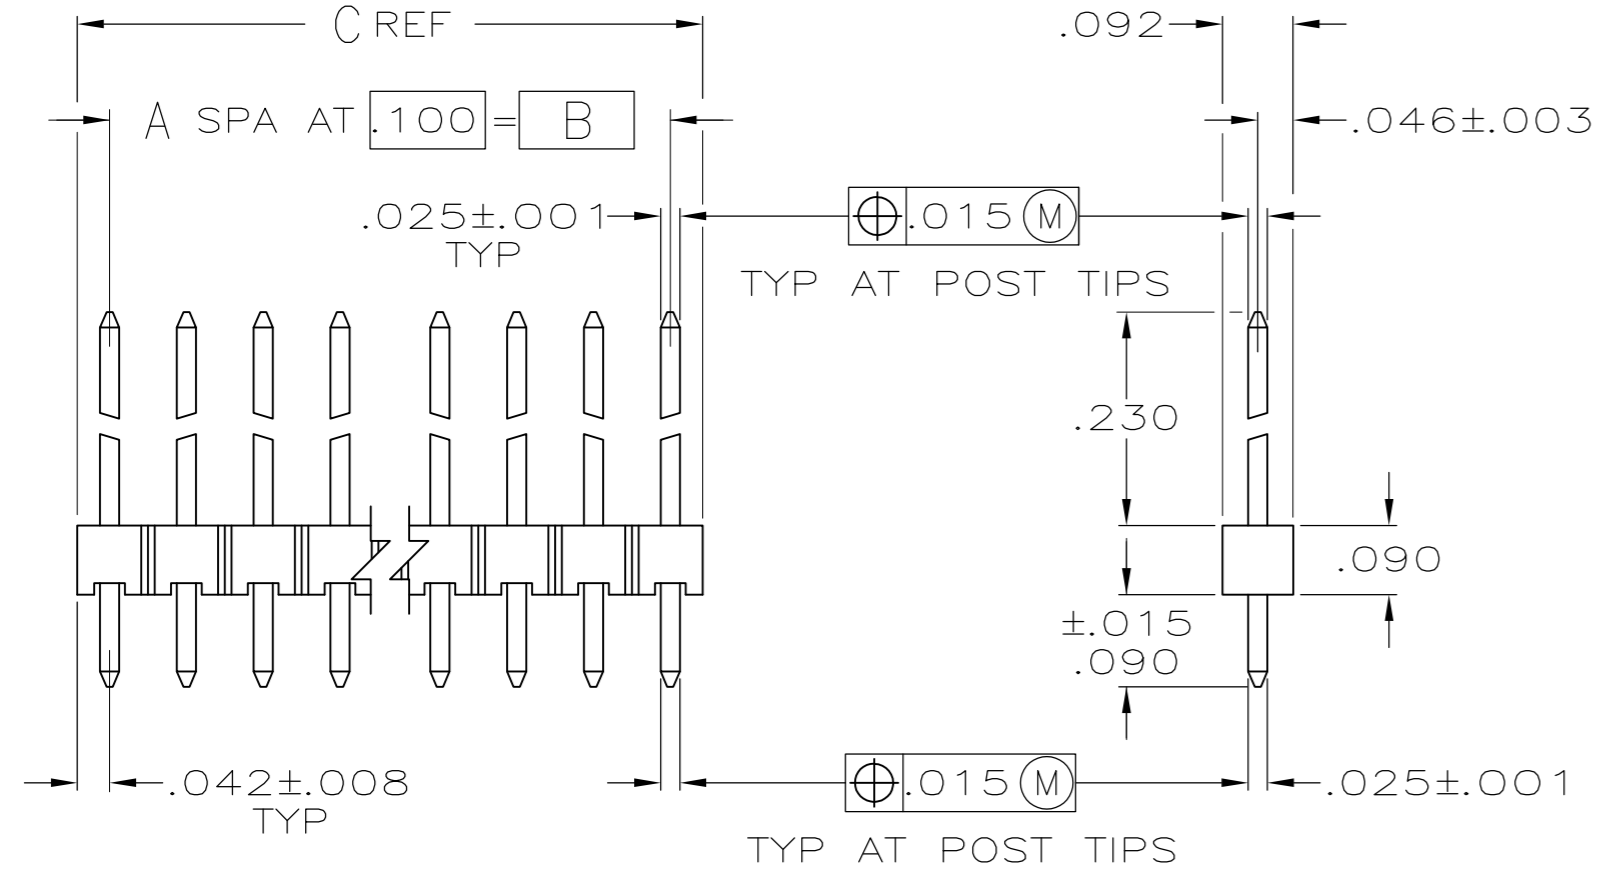

- 1 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR BLACK.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	4	1.584	1.500	15	16	4-103741-2
	4	1.384	1.300	13	14	4-103741-1
OBSOLETE	3	3.984	3.900	39	40	4-103741-0
	3	3.884	3.800	38	39	3-103741-9
SUPERSEDED BY 8-146282-7	3	3.784	3.700	37	38	3-103741-8
	3	3.684	3.600	36	37	3-103741-7
OBSOLETE	3	3.584	3.500	35	36	3-103741-6
	3	3.484	3.400	34	35	3-103741-5
	3	3.284	3.300	33	34	3-103741-4
	3	3.284	3.200	32	33	3-103741-3
	3	3.184	3.100	31	32	3-103741-2
	3	3.084	3.000	30	31	3-103741-1
	3	2.984	2.900	29	30	3-103741-0
	3	2.884	2.800	28	29	2-103741-9
	3	2.784	2.700	27	28	2-103741-8
	3	2.684	2.600	26	27	2-103741-7
	3	2.584	2.500	25	26	2-103741-6
	3	2.484	2.400	24	25	2-103741-5
	3	2.384	2.300	23	24	2-103741-4
	3	2.284	2.200	22	23	2-103741-3
	3	2.184	2.100	21	22	2-103741-2
	3	2.084	2.000	20	21	2-103741-1
	3	1.984	1.900	19	20	2-103741-0
	3	1.884	1.800	18	19	1-103741-9
	3	1.784	1.700	17	18	1-103741-8
	3	1.684	1.600	16	17	1-103741-7
	3	1.584	1.500	15	16	1-103741-6
	3	1.484	1.400	14	15	1-103741-5
	3	1.384	1.300	13	14	1-103741-4
	3	1.284	1.200	12	13	1-103741-3
	3	1.184	1.100	11	12	1-103741-2
	3	1.084	1.000	10	11	1-103741-1
	3	.984	.900	9	10	1-103741-0
	3	.884	.800	8	9	103741-9
3	.784	.700	7	8	103741-8	
3	.684	.600	6	7	103741-7	
3	.584	.500	5	6	103741-6	
3	.484	.400	4	5	103741-5	
3	.384	.300	3	4	103741-4	
3	.284	.200	2	3	103741-3	
3	.184	.100	1	2	103741-2	
3	.084			1	103741-1	
PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

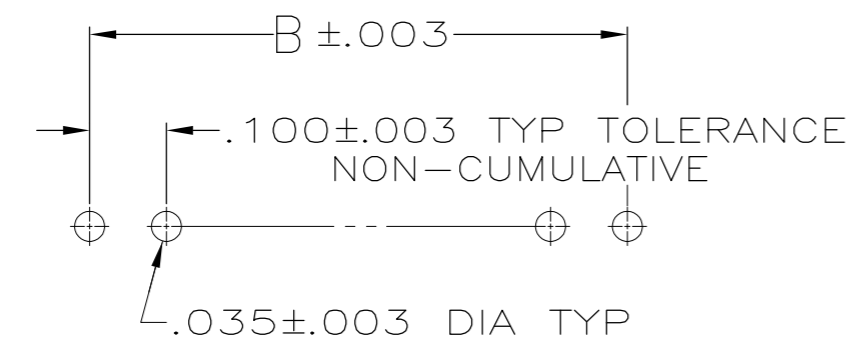

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN L. RINGLEY 7-19-85	TE Connectivity
	0 PLC ± -	CHK R. ELICKER 7-19-85	
	1 PLC ± -	APVD R. ELICKER 7-19-85	
	2 PLC ± -	PRODUCT SPEC	
MATERIAL PHOSPHOR BRONZE	FINISH SEE TABLE	APVD R. ELICKER 7-19-85	NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQ. POSTS
		APPLICATION SPEC	SIZE A2 CAGE CODE 00779 DRAWING NO C=103741
		WEIGHT -	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 of 1 REV H2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)