


REV. CT

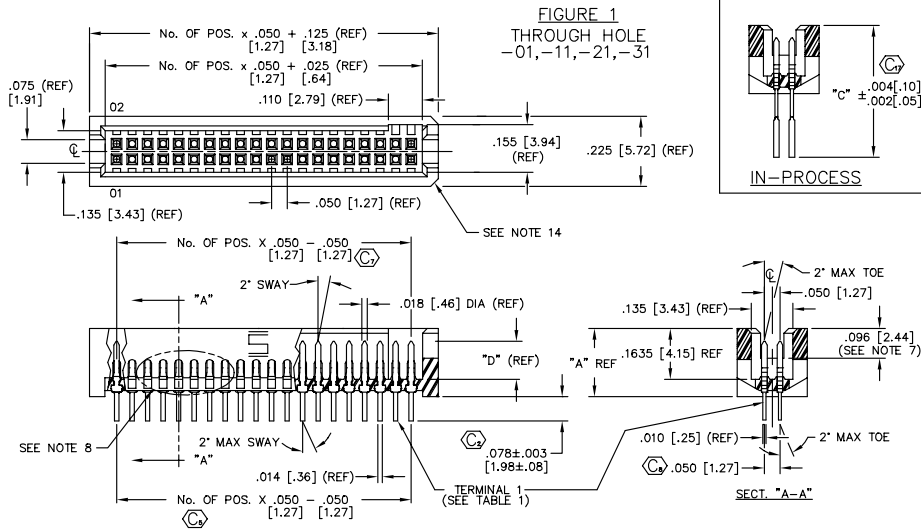

DO NOT SCALE PRINT

FIGURE 1
THROUGH HOLE
-01, -11, -21, -31

UNLESS OTHERWISE NOTED TOLERANCES ARE:
ONE PLACE DECIMALS ±1 [2.54] THREE PLACE DECIMALS ±.005 [1.27]
TWO PLACE DECIMALS ±.01 [2.54] FOUR PLACE DECIMALS ±.0020 [0.05]

ANGLES ±2°

TITLE: .050 x .050 TERMINAL STRIP

DWG NO: TFM-1XX-XX-XXX-X-XX SHEET 1 OF 3

TFM-1XX-XX-XXX-X-XX

NO. OF POSITIONS
LEAD STYLE -01: (-5 THRU -50 ALL POSITIONS AVAILABLE)
LEAD STYLE -02: (-5 THRU -50 ALL POSITIONS AVAILABLE)

ALL OTHER LEAD STYLES: (-5 THRU -50 MULTIPLES OF 5)
LEAD STYLES -11, -12 POS 12, 16, 17 ALSO AVAILABLE
LEAD STYLES -21, -22, -31, -32 POS 12 & 13 ALSO AVAILABLE



LEAD STYLE
THROUGH HOLE SURFACE MOUNT
-01: (SEE FIG. 1) -02: (SEE FIG. 2)
-11: (SEE FIG. 1) -12: (SEE FIG. 2)
-21: (SEE FIG. 1) -22: (SEE FIG. 2)
-31: (SEE FIG. 1) -32: (SEE FIG. 2)

PLATING SPECIFICATION
-S: SELECTIVE
-L: LIGHT SELECTIVE
-F: FLASHED GOLD
-P: GOLD FLASHED PALLADIUM NICKEL
-G: GOLD
-H: HEAVY GOLD
-SM: SELECTIVE HEAVY GOLD, MATTE TIN TAIL
-LM: SELECTIVE LIGHT GOLD, MATTE TIN TAIL
-FM: FLASH SELECTIVE GOLD, MATTE TIN TAIL
-STL: SELECTIVE TIN LEAD

OPTIONS
-A: ALIGNMENT PIN (USE TFM-XX-D-XX-A, SEE TABLE 1) (SEE FIG. 8, SHEET 2) (NOT AVAILABLE FOR -RA)
-LC: LOCKING CLIP (USE LC-05-TM) (NOT AVAILABLE WITH -RA OPTION) (SEE FIG. 10, SHEET 2) (SEE NOTE 13)
-P: PICK AND PLACE PAD (USE PPP-04) (AVAILABLE IN ALL POSITIONS) (NOT AVAILABLE WITH -RA OPTION, SEE FIG. 7, SHEET 2)
-RA: RIGHT ANGLE (AVAILABLE ONLY IN LEAD STYLE: -01, SEE FIG. 5, SHEET 2)
-TR: TAPE AND REEL (SEE FIG. 4)
-SA: STAKED ALIGNMENT PIN (SEE FIG. 9, SHEET 2) (NOT AVAILABLE FOR -RA)
-K: POLYAMIDE FILM (SEE FIG. 3)
-WT: WELD TABS (USE WT-25-04-T) (AVAILABLE ON -01 & -02 LEAD STYLES ONLY) (SEE FIG. 6, SHEET 2) (AVAILABLE ON -05, -07, -10, -15, -20, -25, & -30 POS ONLY) (AVAILABLE WITH -L & -S PLATING ONLY) (NOT AVAILABLE WITH -A, -LC, -RA, OR -SA OPTIONS)

BODY SPECIFICATION
-D: DOUBLE ROW

* = NOT RELEASED FOR PRODUCTION

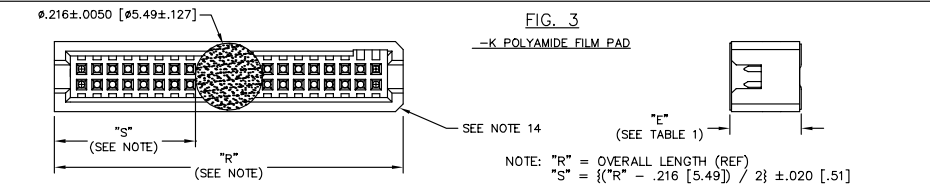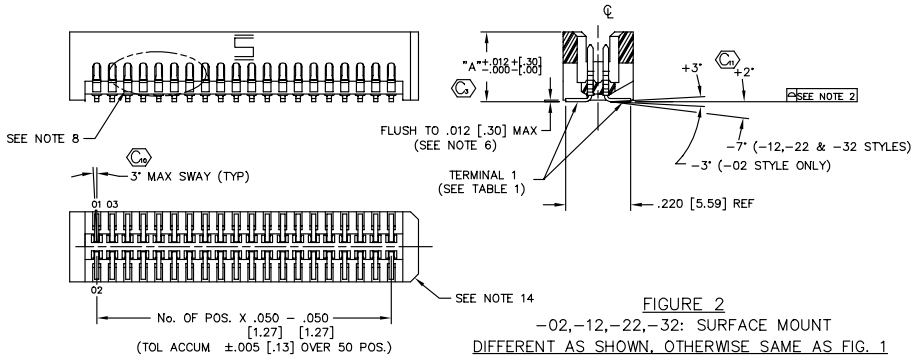

- NOTES:
1. MINIMUM PUSHOUT FORCE TO BE 12 OUNCES.
2. COPLANARITY: .004 [10]=POS 02 THRU 26
.006 [15]=POS 27 THRU 50
3. MANUFACTURING IN PROCESS DIMENSION DESIGNED TO ACHIEVE FINISHED ASSEMBLY.
4. Ⓢ REPRESENTS CRITICAL DIMENSION.
5. [] DIMENSIONS ARE IN MILLIMETERS.
6. MEASURED FROM BEND.
7. DIMENSION CHANGED PER REVISION AD. CONTACT ENGINEERING FOR INFORMATION.
8. SIDES OF PLASTIC BODIES ON ALL LEADSTYLES EXCEPT THE -01 & -02 WILL BE SOLID AND NOT RIBBED.
9. MEASURE FROM TIPS OF PIN.
10. NOTE DELETED.
11. .003 MAXIMUM TERMINAL BURR
12. .005 MAXIMUM HEIGHT VARIATION BETWEEN ANY TWO PINS.
13. MINIMUM LOCKING CLIP RETENTION TO BE 8 OZS.
14. THIS FEATURE ONLY PRESENT ON -01 & -02 LEAD STYLES.

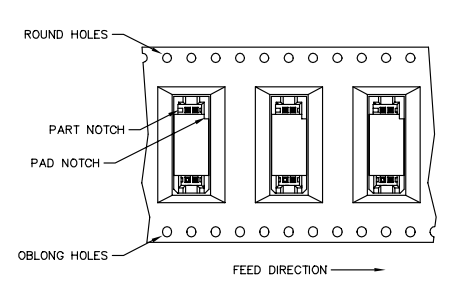


TABLE 1

LEAD STYLE	BODY	"A"	TERMINAL 1	"B"	TERMINAL 2	"C"	"D"	"E"
-01, -02	TFM-XX-D-01-X	.2200 [5.588]	T-1R16-01-XXX-2 T-1R16-01-XXX-2	.015 [3.8]	-----	.427±.004 [10.85±.10]	.133 [3.38]	.230 [5.84]
-11, -12	TFM-XX-D-02-X	.2900 [7.366]	T-1R20-03-XXX	.030 [7.6]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.300 [7.62]
-21, -22	TFM-XX-D-03-X	.3600 [9.144]	T-1R20-04-XXX	.100 [2.54]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.370 [2.00]
-31, -32	TFM-XX-D-04-X	.4350 [11.049]	T-1R20-02-XXX	.175 [4.45]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.445 [11.30]
-01-RA	TFM-XX-D-01-X	.2200 [5.588]	T-1R16-02-XXX	.035 [7.6]	T-1R16-03-XXX	-----	.133 [3.38]	.230 [5.84]

MATERIAL:
INSULATOR:
LIQUID CRYSTAL POLYMER
COLOR: BLACK

TERMINAL:
PHOSPHOR BRONZE

FIG. 4
-TR TAPE AND REEL

EXISPROD/ASSEMBLY/050
TFM-ASM

santec

520 PARK EAST BLVD., NEW ALBANY, INDIANA 47150
PHONE (812) 344-5733 P.O. BOX 1147
CODE 55322

MADE BY: KOLB 12-8-89 APPROV. BY: []
CHECKED BY: MCCARTIN D.E.M.

TFM-1XX-XX-XXX-X-XX
SHEET 1 OF 3

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SANTEC INC. NO PART OF THIS DOCUMENT
SHALL BE REPRODUCED OR TRANSMITTED
IN ANY FORM OR BY ANY MEANS, ELECTRONIC
OR MECHANICAL, INCLUDING PHOTOCOPYING,
RECORDING, OR BY ANY INFORMATION
STORAGE AND RETRIEVAL SYSTEM, WITHOUT
THE WRITTEN CONSENT OF SANTEC INC.

REV. CT


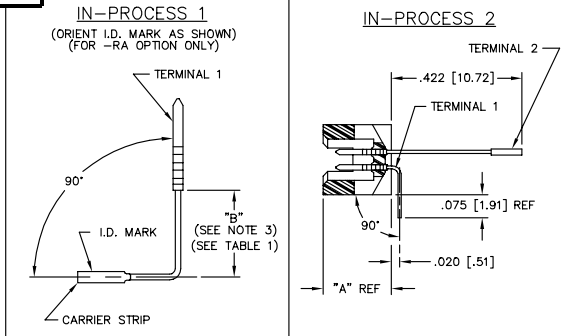


FIG. 5
-RA OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

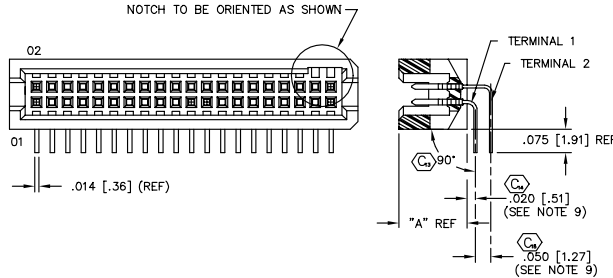

UNLESS OTHERWISE NOTED TOLERANCES ARE:
ONE PLACE DECIMALS ±.1 [2.54] THREE PLACE DECIMALS ±.005 [.13] ANGLES ±2°
TWO PLACE DECIMALS ±.01 [.25] FOUR PLACE DECIMALS ±.0020 [.05]

TITLE: .050 x .050 TERMINAL STRIP

DWG NO: TFM-1XX-XX-XXX-X-XX SHEET 2 OF 3

FIG. 8
-A OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

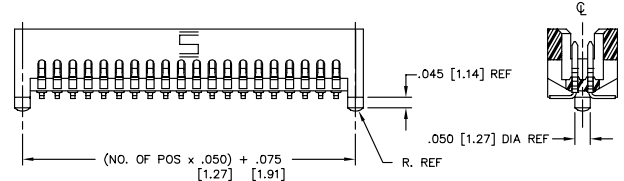


FIG. 6
*-WT OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

* = NOT RELEASED FOR PRODUCTION

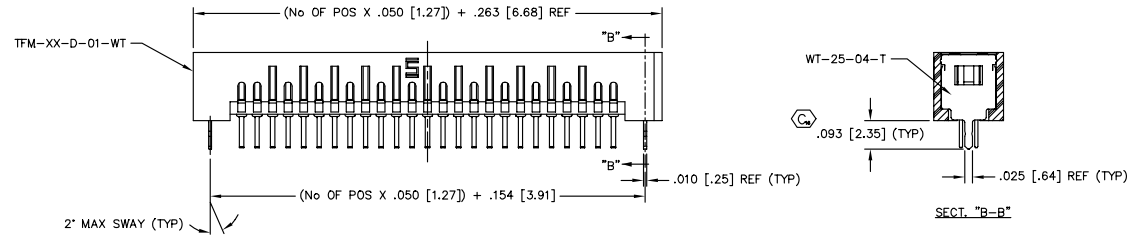


FIG. 9
-SA OPTION: STAKED AL PIN
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

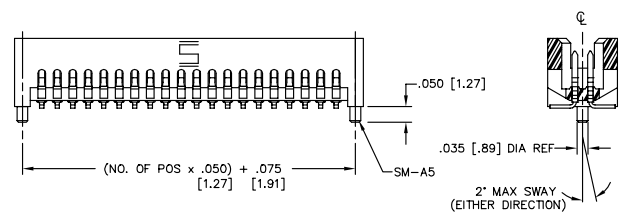


FIG. 7
-P OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(PAD TO BE POSITIONED ON C.L. AS SHOWN)

* NOTCH ON PAD FOR 10 POSITION OR LESS TO BE ON THE SAME END AS THE NOTCH IN THE TFM BODY


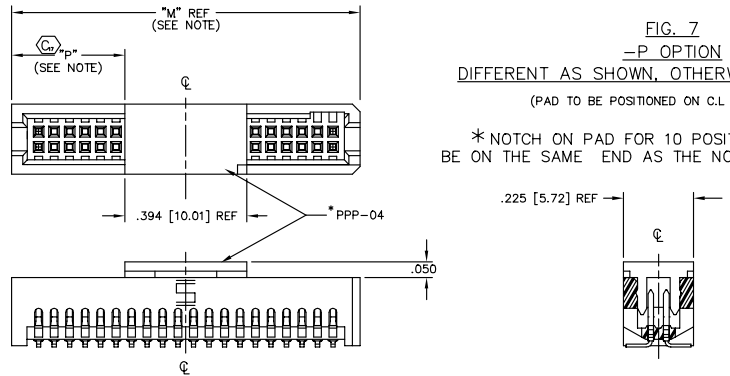


FIG. 10
-LC OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(STYLE -02 SHOWN)

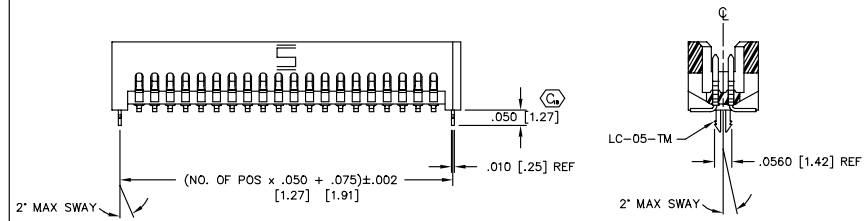

-NOT AVAILABLE ON -RA

PROPRIETARY NOTE
THIS DRAWING IS THE PROPERTY OF SAMTEC CORPORATION. IT IS TO BE USED ONLY FOR THE PROJECT AND QUANTITY SPECIFIED IN THE ORDER. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SAMTEC CORPORATION.

NOTE: "M" = (No OF POS x .050 [1.27]) + .125 [3.18]
"P" = {"M" - .394 [10.01]} / 2 ±.020 [.51]

EXSPROD/ASSEMBLY.050
TFM-ASM2

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA, 47150
PHONE: (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: KOLB 10-25-91

TFM-1XX-XX-XXX-X-XX SHEET 2 OF 3

REV. CT

PARTS TO BE PACKAGED IN TUBES AS SHOWN

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED		TOLERANCES ARE:	TITLE: .050 x .050	DWG NO: TFM-1XX-XX-XXX-X-XX
ONE PLACE DECIMALS ±.1 [2.54]	THREE PLACE DECIMALS ±.005 [.13]	ANGLES ±.2°	TERMINAL STRIP	SHEET 3 OF 3
TWO PLACE DECIMALS ±.01 [.25]	FOUR PLACE DECIMALS ±.0020 [.05]			

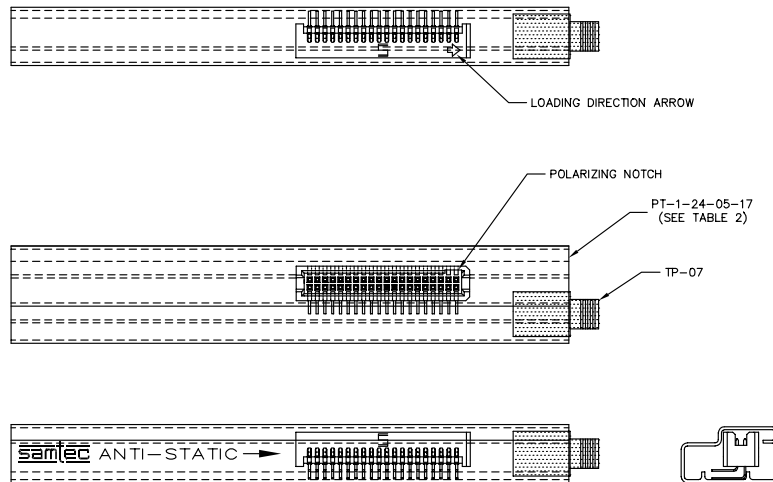
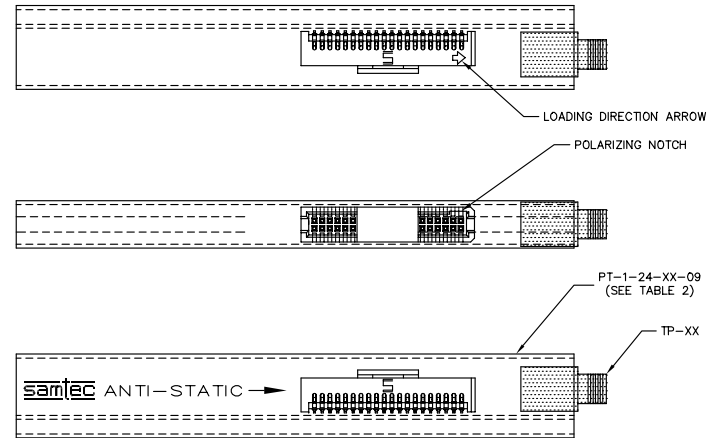
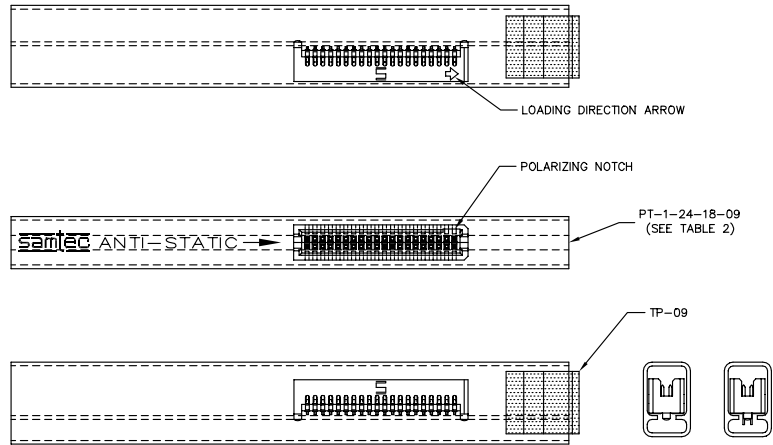


TABLE 2

LEAD STYLE	PACKAGING TUBE	PLUG
-RA (ALL LEAD STYLES)	PT-1-24-05-17	TP-07
-02, -02-A, -02-A-K, -02-LC	PT-1-24-01-09	TP-24
-12 (ALL OPTIONS), -22-K, -22, -22-A, -22-A-K, -22-LC, -22-LC-K	PT-1-24-04-09	TP-07
-02-A-P, -02-K, -02-LC-K, -02-LC-P, -02-P, -02-WT -01 (ALL OPTIONS), -11, -11-A, -11-LC, -11-K, -11-LC-K, -11-A-K	PT-1-24-18-09	TP-09
-31-A-K, -31-A-P, -31-LC-P, -31-P, -32, -32-K -32-A, -32-A-K, -32-A-P, -32-LC-K, -32-LC-P, -32-P	PT-1-24-02-09	TP-07
-31, -21-P, -22-P, -31-LC, -21-A-P, -21-LC-P, -22-LC-P, -31-A, -32-LC, -22-A-P, -31-LC-K, -31-K	PT-1-24-05-09	TP-07
-11-P, -11-LC-P, -11-A-P, -21, -21-K, -21-A, -21-LC, -21-A-K, -21-LC-K	PT-1-24-20-09	TP-07

NOTE:
PARTS TO BE PACKAGED WITH THE LOADING DIRECTION ARROW POINTED IN SAME DIRECTION AS THE ARROW ON TUBE.

PROPRIETARY NOTE
THIS DOCUMENT IS THE PROPERTY OF SAMTEC CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE MANNER SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SAMTEC CORPORATION.

EXSPROD/ASSEMBLY_050
TFM-ASMS

samtec

520 PARK EAST BLVD., NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: KOLB 10-25-91

TFM-1XX-XX-XXX-X-XX
SHEET 3 OF 3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)