ACS Silicon Coated Axial Resistors **GRCOL**

The design of the ACS resistor provides a good balance of power density, stability and resistance to environment for a broad range of industrial power applications, such as drives and controls.

- Good ratio between power capability and physical size
- Wound to maximise high pulse capability
- Low inductive versions available
- Available on tape and reel 1W to 5W or bulk
- RoHS Compliant



Characteristics

Tolerance (Code): Temperature coefficient: Insulation resistance: Dielectric withstand voltage: MIL types: Standard F (±1%), J (±5%) and K (±10%); other tolerances available on request <1R ±90ppm/°C, 1R-10R ±50ppm/°C, >10R ± 20ppm/°C 1, 000M ohms minimum dry, 100M ohms minimum after moisture test 500V AC Available upon request.

Electrical Specifications

		Max working voltage (V)	Resistance range	
Туре	Wattage		Inductive	Non Inductive (N)
ACS 1	1	50	R01 - 8K	R01 - 3K
ACS 2	2	100	R01 - 10K	R1 - 4K
ACS 3	3	200	R01 - 18K	R01 - 9K
ACS 5S	5	157	R01 - 22K	R01 - 10K
ACS 5L	5	400	R01 - 35K	R1 - 17K
ACS 7	7	450	R01 - 50K	R1 - 25K
ACS 10S	10	700	R01 - 70K	R01 - 35K
ACS 10L	10	800	R01 - 100K	R01 - 50K

Typical Inductance

Туре	<50 ohms	>50 ohms			
ACS 1 - ACS2	0.2µH	0.37µH			
ACS 3 - ACS5L	0.3µH	0.6µH			
ACS 7 - ACS 10L	0.65µH	1.2µH			
As specified by MIL-R-39007. Max series inductance at 0.5MHz.					

ARCOL UK Limited,

Threemilestone Ind. Estate, Truro, Cornwall, TR4 9LG, UK.


T +44 (0) 1872 277431

F +44 (0) 1872 222002

E sales@arcolresistors.com

www.arcolresistors.com

Derating Curve

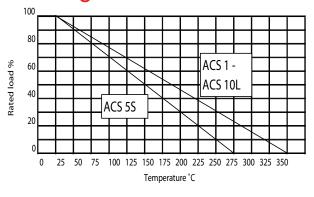

Ordering Procedure

<u>Standard Resistor</u> To specify standard: Series, Wattage Rating, Winding Type, Resistance and Tolerance Code, e.g.: ACS3 18K F


ACS3N 18K F (non-inductive)

 $\frac{Tolerance\ (Code)\ \pm 0.05\%\ (A),\ \pm 0.1\%\ (B),\ \ \pm 1\%\ (F),\ \pm 2\%\ (G),}{\pm 5\%\ (J),\ \pm 10\%\ (K)}$

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

ACS Silicon Coated Axial Resistors **GRCOL**

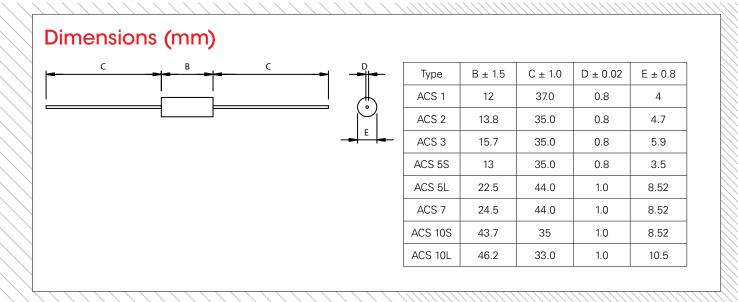

ARCOL UK Limited, Threemilestone Ind. Estate, Truro, Cornwall, TR4 9LG, UK. T +44 (0) 1872 277431 F +44 (0) 1872 222002 E sales@arcolresistors.com

www.arcolresistors.com

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

6/11.50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wirewound Resistors - Through Hole category:

Click to view products by Ohmite manufacturer:

Other Similar products are found below :

75822-2K4 90J56R AC03000001208JAC00 EP3WS47RJ C1010KJL C1015RJL C3A10KJT 27J1K0 ES3W47RJ AC04000001500JAC00 AC10000002208JAB00 AC10000004708JAB00 SQMW5R39J SQPW5R22J SQPW5R33J 1879927-3 FCB2100RJ T505 FSQ5WR47J FW10A33R0JA CPCC0510R00JE32 CPCC051R000JB31 CPCP10500R0JE32 CPW05700R0JE143 CPW152K500JE313 C1010RJL C10220RJL C10R47JL C141K0JL C144R7JL ES05W100RJ SQMW1047RJ SQMW210RJ CPCC03R2000JB31 CPCC0515R00JE01 CPW055R000JB143 CPW103K300JE143 CPW202R000JB14 ULW5-39R0JT075 ULW5-68RJT075 SQBW401K0JFASTON SPH1001JLF 65888-3R3 CPCC10R5100JE66 SQP500JB-400R SQBW403R3JFASTON 280-PRM7-4.7-RC CW02B9R100JE73 CPCP05R1000JE32 FW70A1000JA