
# 32.768 kHz S MD LOW PR OFILE CRYSTA L

## ABS10



ABS10 is not recommended for new designs. Please consider our reduced size ABS07 or ABS06.

#### > FEATURES:

- Low frequency in small size SMD
- 1.0mm height ideal for high density circuit boards
- Ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications

#### > STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	ABS10 Series
Nominal Frequency	32.768 kHz
Operating Temperature	-40°C to + 85°C
Turn-over Temperature	+25°C to ±5°C
Storage Temperature	-55°C to +125°C
Frequency Tolerance	±20 ppm max. (see option)
Temperature Coefficient (ß)	- 0.034±0.006 ppm/T <sup>2</sup>
Equivalent Series Resistance	70 kohms max.
Load Capacitance CL	12.5 pF (see option)
Drive Level	1.0 μW max.
Aging (first year) 25°C first year	± 5 ppm max.
Insulation Resistance	500 MΩ with 100 Vdc ±15V
Shunt capacitance Co	1.0pF typ.
Motional capacitance C1	2.0fF typ.

### > APPLICATIONS:


Wide range in communication & measuring equipment

RoHS

Compliant

- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

#### TUNING FORK CRYSTAL TEMPERATURE CURVE



#### > OPTIONS AND PART IDENTIFICATION: (Left blank if standard) ABS10 - 32.768kHz -4---Load Capacitance Freq. Tolerance Packaging Blank: 12.5pF Blank: ± 20 ppm Blank: Bulk 9: 9pF 1: ± 10 ppm T: Tape & Reel 4: ± 30 ppm 7: 7pF \*Contact ABRACON for

non-standard load capacitances.





Visit www.abracon.com for Terms & Conditions of Sale Revised: 07.30.10 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

## 32.768kHz SMD LOW PROFILE CRYSTAL

ABS10





Pb

4.9 x 1.8 x 1.0 mm

ABS10

### **OUTLINE DRAWING:**

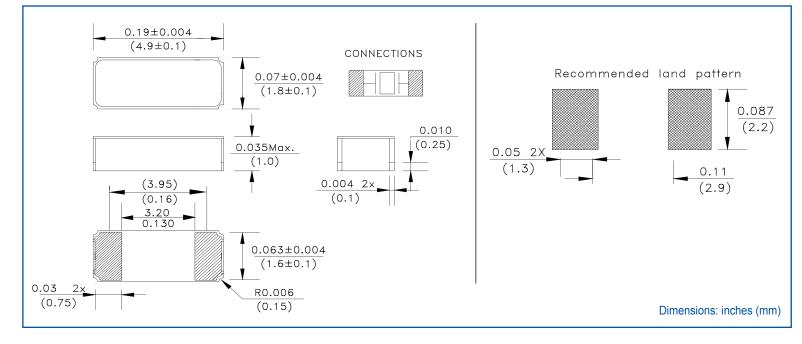

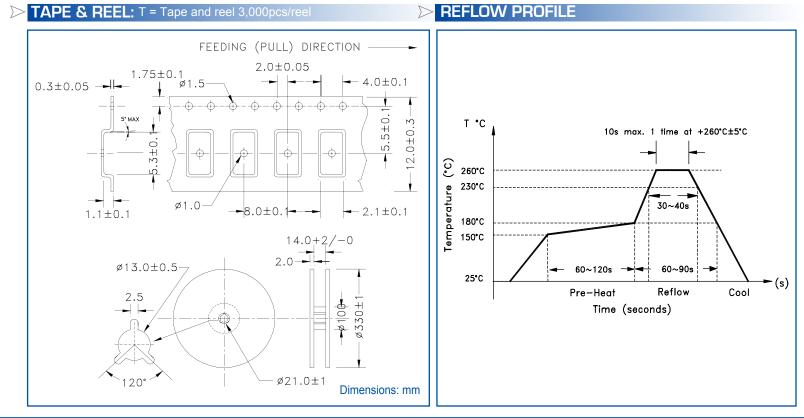

Need a test socket for the ABS10 Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, **click here: P/N AXS-4918-02-11** 

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.30.10** 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below :

CS325S2400000ABJT 718-13.2-1 MC405 32.000K-R3:PURE SN FC-135R 32.7680KF-A3 7A-40.000MAAE-T 7B-27.000MBBK-T FL2000085 9B-15.360MBBK-B 9C-7.680MBBK-T ASH7K-32.768KHZ AT-41.600MAGQ-T BTD1062E05A-513 LFXTAL066198Cutt 9C-14.31818MBBK-T FA-238 50.0000MB30X-K3 FC-12M 32.7680KA-AC3 SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T WX26-32.768K-6PF 9B-14.31818MBBK-B CD1AM 7B-25.000MAAE-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 FA-118T 27.1200MB50P-K0 FC-135R 32.7680KA-A3 ABM12-104-37.400MHZT ABLS-10.000MHZ-D3W-T BTJ112E01E-513 BTJ722K01C-7067 BTL-20-513 TSX-3225 24.0000MF15X-AC TSX-3225 16.0000MF18X-AC BTJ120E02C BTL-12-513 7A-10.000MBBK-T 7A-11.0592MBBK-T ABM12-103-24.000MHZT CS325S25000000ABJT ABM3B-25.000MHZ-B2-X-T FC-135 32.7680KA-A5 FX0800015