


## 5 x 3.2 mm SMD CMOS CXO 7C SERIES




### Features

- > Ultra small SMD seam sealed clock crystal oscillator units.
- > High precision characteristic covering up to wide frequency range.
- > Designed for automatic mounting and reflow soldering.
- > Optionable stand-by function for output: Tri-state output.
- > Supply voltage range : 1.8 V ~ 5.0 V
- > High stability, low jitter, low power consumption.
- > Main application : wireless communication set, PDA, and DSC.
- > RoHS Compliant / Pb Free.

### Electrical Specifications

| Item / Type                     | 7C                                   |                       |               |
|---------------------------------|--------------------------------------|-----------------------|---------------|
| Output Type                     | CMOS                                 |                       |               |
| Output Load                     | 15 pF                                | 15 pF , 30 pF         | 15 pF , 50 pF |
| Oscillation Mode                | Fundamental / 3rd Overtone           |                       |               |
| Supply Voltage                  | 1.8 V                                | 2.5 V , 2.8 V , 3.3 V | 5 V           |
| Frequency Range                 | 1 ~ 150 MHz                          |                       |               |
| Frequency Stability             | ± 50 ppm (-10 ~ + 70 °C), or specify |                       |               |
| Operating Temperature Range     | - 40 ~ + 85 °C                       |                       |               |
| Storage Temperature Range       | - 55 ~ + 125 °C                      |                       |               |
| Voltage Vol (Max.) / Voh (Min.) | 0.1 VDD / 0.9 VDD                    |                       |               |
| Rise (Tr) / Fall (Tf) Time      | 10 ns Max.                           |                       |               |
| Supply Current                  | 20 mA Max.                           | 30 mA Max.            | 45 mA Max.    |
| Symmetry                        | 40 ~ 60 %                            |                       |               |
| Start-up Time                   | 10 ms Max                            |                       |               |
| Phase Jitter (12 KHz ~ 20 MHz)  | 1 ps Max                             |                       |               |
| Aging (at 25 °C)                | ± 3 ppm / year Max.                  |                       |               |

### Dimensions

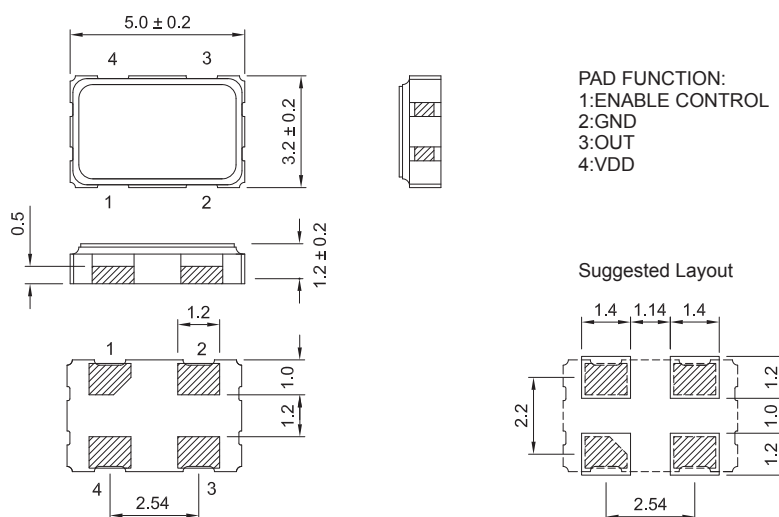

Units:mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [TXC Corporation](#) manufacturer:*

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XO37CTECNA10M](#) [XO57CRECNA16M](#) [XO57CTECNA3M6864](#) [XO57CTECNA4M9152](#) [DSC400-0333Q0032KE1-EVB](#)