CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL

Moisture Sensitivity Level (MSL) – This product is Hermetically

Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable



2.5 x 2.0 x 0.5 mm

FEATURES:

ABM10

- 2.5 x 2.0 x 0.5mm ultra miniature package
- Suitable for RoHS reflow profile
- Tight stability available ± 10 ppm over -10 to $\pm 60^{\circ}$ C
- · Seam sealed ceramic package assures high precision and reliability

STANDARD SPECIFICATIONS:

- > APPLICATIONS:
 - Blue-tooth, Wireless applications

(Pb) RoHS/RoHS II Compliant

Communication, Test equipment

• High density applications


- Computers, Modems, Microprocessors
 PCMCIA
 - · Portable radios and MP3 players

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	12.000		55.000	MHz	Fundamental
Operation Mode	Fundamental				
Operating Temperature	-10		+60	°C	See options
Storage Temperature	-40		+125	°C	
Frequency Tolerance @+25°C			±20	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)			±30	ppm	See options
Equivalent series resistance (R1)	See table 1 below		Ω		
Shunt capacitance (C0)			7	pF	
Load capacitance (CL)	10		pF	Standard (See options if other than STD)	
Drive Level		10	100	μW	
Aging@25°C±3°C			±5	ppm	First year
Insulation Resistance	500			MΩ	(<i>a</i>) $100 \text{Vdc} \pm 15 \text{V}$

Table 1 – standard ESR

Frequency (MHz)	ESR(Ω) max.
12.000 - 15.999	250
16.000 - 19.999	150
20.000 - 29.999	100
30.000 - 55.000	70

OPTIONS & PART IDENTIFICATION: (Left blank if standard)

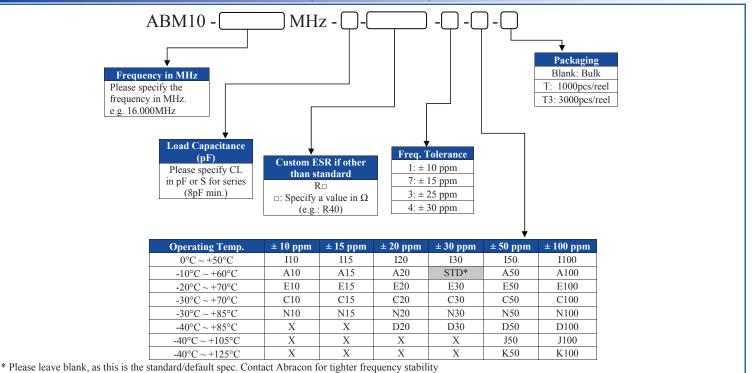

ABRACON IS ISO9001:2008 CERTIFIED





2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 04.21.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit www.abracon.com for Terms and Conditions of Sale

CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL

ABM10

OUTLINE DRAWING:

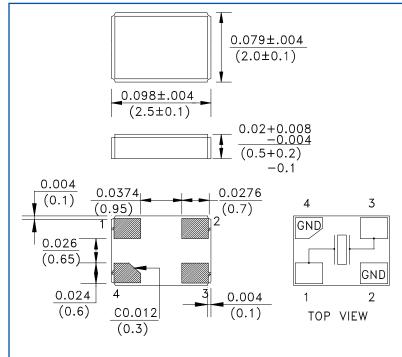


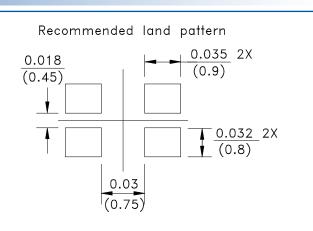

(Pb) RoHS/RoHS II Compliant

Note: From the top view (marking side), pin #1 is always located at the bottom left corner of the package. This is regardless of the location of the Chamfer, since due to material availability, the Chamfer could be located on pin#1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

Dimensions: inches (mm)

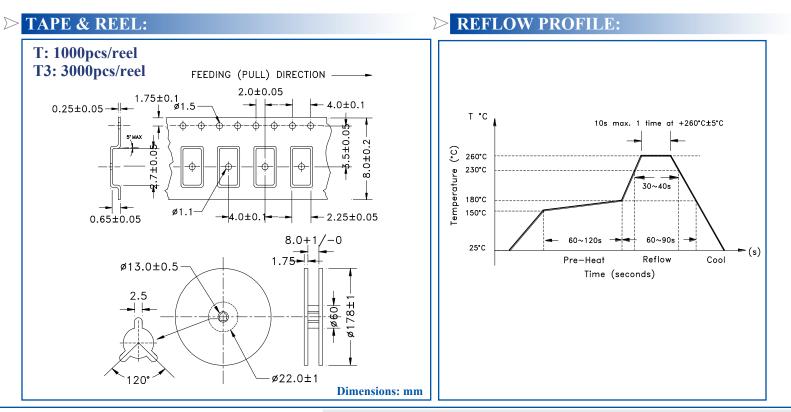

Need a test socket for the ABM10 Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, **click here. P/N: AXS-2520-04-10**

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for moore information



ABRACON IS ISO9001:2008 CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 04.21.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit www.abracon.com for Terms and Conditions of Sale



2.5 x 2.0 x 0.5 mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below :

CS325S2400000ABJT 718-13.2-1 MC405 32.000K-R3:PURE SN FC-135R 32.7680KF-A3 7A-40.000MAAE-T 7B-27.000MBBK-T FL2000085 9B-15.360MBBK-B 9C-7.680MBBK-T ASH7K-32.768KHZ AT-41.600MAGQ-T BTD1062E05A-513 LFXTAL066198Cutt 9C-14.31818MBBK-T FA-238 50.0000MB30X-K3 FC-12M 32.7680KA-AC3 SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T WX26-32.768K-6PF 9B-14.31818MBBK-B CD1AM 7B-25.000MAAE-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 FA-118T 27.1200MB50P-K0 FC-135R 32.7680KA-A3 ABM12-104-37.400MHZT ABLS-10.000MHZ-D3W-T BTJ112E01E-513 BTJ722K01C-7067 BTL-20-513 TSX-3225 24.0000MF15X-AC TSX-3225 16.0000MF18X-AC BTJ120E02C BTL-12-513 7A-10.000MBBK-T 7A-11.0592MBBK-T ABM12-103-24.000MHZT CS325S25000000ABJT ABM3B-25.000MHZ-B2-X-T FC-135 32.7680KA-A5 FX0800015