

3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG

Product Description

3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG is designed to have lower outgassing and lower ionics than 3M™ Scotch-Weld™ Epoxy Adhesive DP-460. Laboratory testing has shown that 3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG's curing and adhesive performance to be comparable to 3M™ Scotch-Weld™ Epoxy Adhesive DP-460.

Application Ideas

- Hard Disk Drive Assembly
- Spindle Motor Assembly
- Magnet Bonding
- E-Block Assembly
- Bearing Cartridge Assembly
- Potting
- Rigidizing

Key Features

- Curing and bonding performance comparable to 3M™ Scotch-Weld™ Epoxy Adhesive DP-460.
- Total outgassing < 1000 µg/g (via GC/MS, 85°C for 3 hours).
- Siloxane outgassing ≤ 5 µg/g (via GC/MS, 85°C for 3 hours).
- Lower chloride ion content than standard epoxies.

Typical Physical Properties

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.


3M™ Scotch-Weld™ Epoxy Adhesive DP460EG		
Viscosity (at 72°F [23°C])	Base Accelerator Mixed	25,000 - 45,000 cps 8,000 - 14,000 cps 15,000 - 25,000 cps
Base Resin	Base Accelerator	Epoxy Amine
Color	Base Accelerator	White Amber
Net Weight (lb/gallon)	Base Accelerator	9.4 9.0
Mix Ratio (B:A)	Volume Weight	2:1 2:0 : 0.96
Worklife (72°F [23°C])		110 minutes
Thermal Conductivity, (btu-ft./sq.ft.-hr.°F)		0.104 @ 45°C
Thermal Coefficient of Expansion, (in./in./°C)		59 × 10 ⁻⁶ (-50°C to 30°C) 159 × 10 ⁻⁶ (50°C to 110°C)
Dielectric Constant, (1 KHZ @ 23°C)		4.7
Dielectric Strength, (volts/mil.)		510 (43 mil)

3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG

Curing

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

This adhesive will cure in 24 hours at room temperature. Heating will accelerate the cure and can result in a higher T_g than room temperature curing yields. Curing data is shown in the figure below.

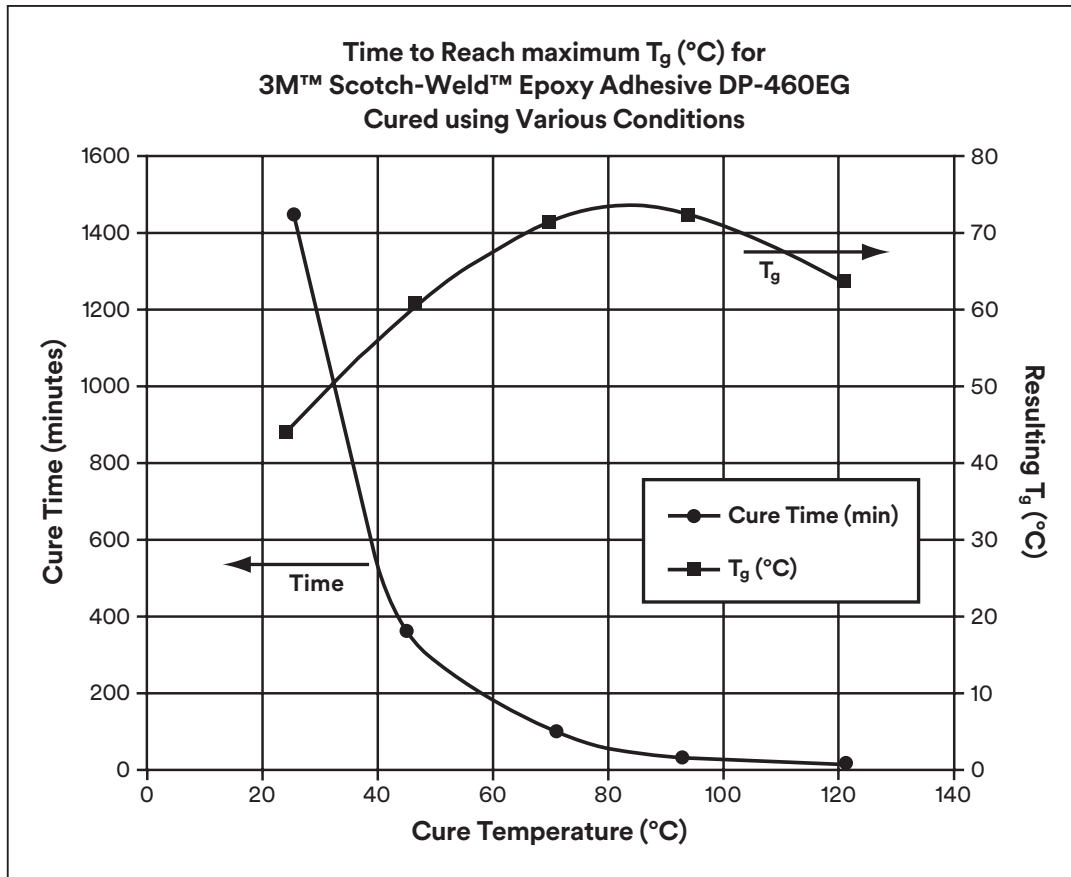

Note: If the adhesive has become grainy or lumpy in appearance when dispensed, this may be due to crystallization of the adhesive. This can be corrected by heating the adhesive in the syringe to 120°F (49°C) for 30 minutes, then allowing the adhesive to cool before dispensing.

3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG

Typical Performance Characteristics¹

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Shear and Peel Strength vs. Cure Temperature / Time

	72°F (23°C) 24 hours	120°F (49°C) 270 minutes	160°F (71°C) 90 minutes	200°F (93°C) 30 minutes	250°F (121°C) 10 minutes
Overlap Shear ² (lbf/in ²)	> 5000	> 5000	> 5500	> 5500	> 5500
T-Peel ³ (lbf/in)	60 ⁴	59 ⁴	43 ⁴	39 ⁵	45 ⁵

¹See Technical Data Sheet 3M™ Scotch-Weld™ Epoxy Adhesive DP-460 for additional typical performance characteristics.

²0.060 inch thick, etched aluminum pulled at 0.10 inches/minute. Tested in accordance with ASTM D-1002-72 test method.

³0.032 inch thick, anodized aluminum pulled at 20 inches/minute. Tested in accordance with ASTM D1876-61T test method.

⁴Cohesive failure mode.

⁵Adhesive failure mode.

Storage and Shelf Life

Storage: Store 3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG at 60-80°F (15-27°C) or refrigerate for maximum shelf life.

Shelf Life: 3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG has a shelf life of 15 months when stored in its original container.

3M™ Scotch-Weld™ Epoxy Adhesive DP-460EG

Safety Data Sheet: Consult Safety Data Sheet before use.

Regulatory: For regulatory information about this product, contact your 3M representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M

Electronics Materials Solutions Division

3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
1-800-251-8634 phone
651-778-4244 fax
www.3M.com/electronics

3M and Scotch-Weld are trademark of 3M Company.
Please recycle.
©3M 2015. All rights reserved.
78-6900-9832-8



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Chemicals](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[HANDPAD](#) [1624-10S](#) [3045-QT](#) [3065-15S](#) [3125-9S](#) [5200-WHITE-3OZ](#) [70008073302](#) [1398159-1](#) [S1255-04-34X100FT](#) [3748-Q-58"x8"](#) [FO-25DT](#) [13844](#) [S1009-KIT-A-CS8606](#) [8361-P](#) [2216-GRAY-2OZ](#) [DP100-200ML](#) [1743-2FP](#) [2310-10](#) [VERSIL406](#) [826-450G](#) [SS4120-1P](#) [3789-Q](#) [9729](#) [9223](#) [9176](#) [600-0510](#) [3748PG](#) [04952-00531-00](#) [04952-00533-00](#) [10-50L](#) [3748-Q-5/8"X8"](#) [3764-TC](#) [3M 9087](#) [3M 9088](#) [AS1700](#) [120-320](#) [BLR-15ML](#) [HYBRICX 35C](#) [7552](#) [7558](#) [3748-V-O-Q-5/8"X8"](#) [3764-Q](#) [3779-TC](#) [3797TC](#) [3M 9086](#) [100500F00000G](#) [101800F00000G](#) [1610-5G](#) [1610-G4](#) [1621-5G](#)