

EKI-7758F

4G+4 SFP Gigabit Managed Redundant Industrial Ethernet Switch



Features

- All Gigabit Ethernet ports for 4 Copper and 4 SFP
- SFP sockets for easy and flexible fiber expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL
- Diagnostic: Port statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 12 ~ 48 V_{DC} power input and 1 relay output

Introduction

EKI-7758F supports 8 Gigabit ports with 4 x Ethernet and 4 x SFP. To create reliability in your network, the EKI-7758F comes equipped with a proprietary redundant network protocol -- X-Ring that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7758F also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 100Base-T (X), 10/1000Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet : Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
SFP: Up to 1000 Mbps

Interface

- **Connectors** 4 x RJ45 (Ethernet)
4 x SFP (mini-GBIC) ports
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR, R.M., PWR1, PWR2, P-Fail
Gigabit Copper: Link/Activity, Speed
SFP: Link/Activity
- **Console** RS-232 (RJ45)

Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL

- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNMP, Syslog, E-Mail Alert, SNMP Trap, RMON

Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

Power

- **Power Consumption** Max. 17 W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Fault Output** 1 Relay Output

Protection


- **Power Reverse** Present
- **Overload Current** Present

Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 289,777 hours

Dimensions

Unit: [mm]

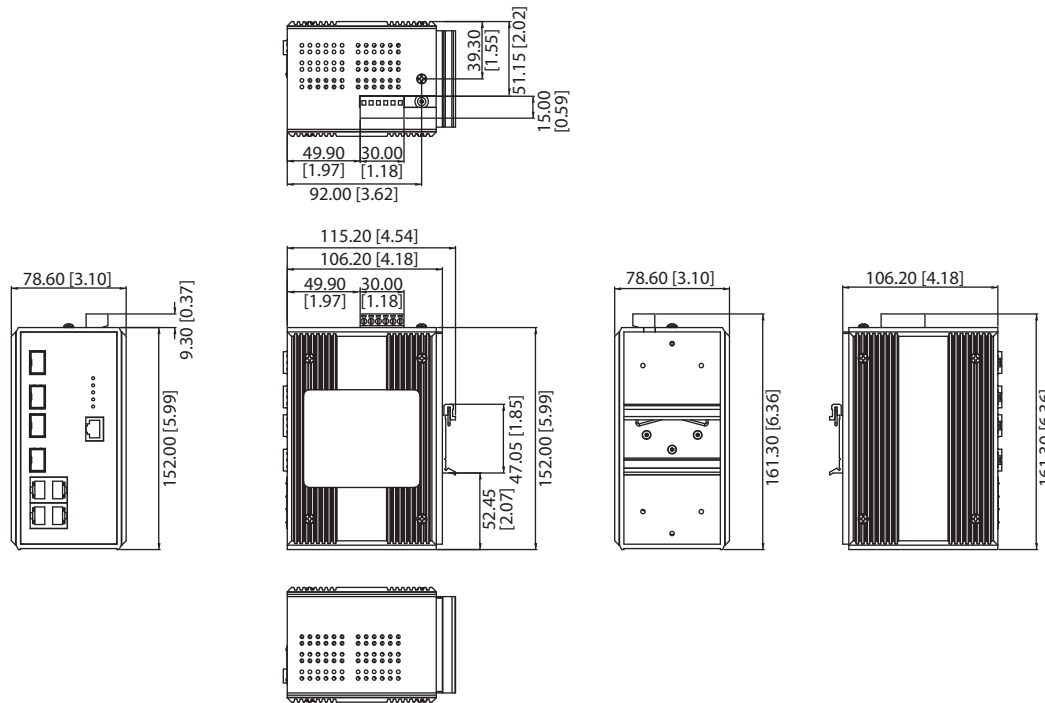

Panel Cut-out Dimensions: 115.2 x 152 x 78.6 mm (4.54" x 5.99" x 3.1")

Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
Class I, Division 2
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Ordering Information

- **EKI-7758F** 4G+4 SFP Managed Gigabit Ethernet Switch

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)