


SQF-SLM 630

SATA III (6.0Gb) Half-Slim Module

SQF-S10 630

SATA III (6.0Gb) CFast

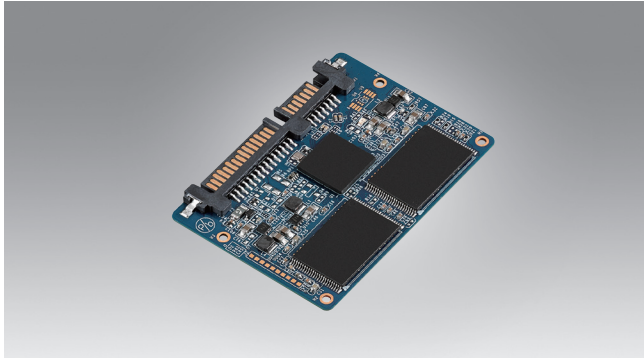

Flash Security ID



Life Monitoring



Flash Lock



Emergency Erase



CE FCC



Flash Security ID



Life Monitoring



Flash Lock



Emergency Erase

Features

- MO-297 Half-Slim SATA module
- Compliant with SATA III and SATA v 3.0 standard
- Supports 72 bit ECC correct per 1K Byte data
- Low power consumption SATA III storage module
- Shock resistance, anti-vibration and low power consumption
- GUI management tool & software API package
- Supports hardware write protect

Features

- Compliant with standard CFast card Type 1 specifications
- Interface: SATA Gen. 3
- Supports 72 bit ECC correct per 1K Byte data
- Universal wear-leveling and bad block management
- Shock resistance, anti-vibration and low power consumption
- GUI management tool & software API package

Specifications

Connector Type	Standard 7+15-pin SATA connector
Flash Type	SLC / Ultra MLC / MLC
Capacity	SLC: 1 to 64GB Ultra MLC: 8 to 128GB MLC: 4 to 256GB
Transfer Mode	SATA III (6.0 Gbps)
Max. Power Consumption	370 mA
Sustained R/W Performance*	SLC and MLC up to 510/150 MB/sec
Operating Temperature	Commercial grade: 0 to +70 °C Industrial grade: -40 to +85 °C
Shock Resistance	1,500 G, peak / 0.5 ms
Vibration Resistance	20 G, peak / 80 ~ 2000 Hz
Dimensions (mm)	54.0 x 39.0 x 4.5

* These values are for reference only; they may change according to the flash memory used.

Specifications

Connector Type	CFast Type 1 Connector
Flash Type	SLC / Ultra MLC / MLC
Capacity	SLC: 1 to 32GB Ultra MLC: 4 to 64GB MLC: 4 to 128GB
Transfer Mode	SATA III (6.0 Gbps)
Sustained R/W Performance *	SLC: up to 500/150 MB/sec MLC: up to 250/100 MB/sec
Operating Temperature	Commercial grade: 0 to +70 °C Industrial grade: -40 to +85 °C
Shock Resistance	1,500 G, peak / 0.5 ms
Vibration Resistance	20 G, peak / 80 ~ 2000 Hz
Dimensions (mm)	42.8 x 36.4 x 3.3

* These values are for reference only; they may change according to the flash memory used.

Ordering Information

PN	Description
SQF-SLMS1-1G-S9C	SQFlash 630 series SATA Slim 1 GB SLC, 1-CH (0 ~ 70 °C)
SQF-SLMS1-1G-S9E	SQFlash 630 series SATA Slim 1 GB SLC, 1-CH (-40 ~ 85 °C)
SQF-SLMS2-2G-S9C	SQFlash 630 series SATA Slim 2 GB SLC, 2-CH (0 ~ 70 °C)
SQF-SLMS2-2G-S9E	SQFlash 630 series SATA Slim 2 GB SLC, 2-CH (-40 ~ 85 °C)
SQF-SLMS4-XG-S9C	SQFlash 630 series SATA Slim 4/8/16/32/64 GB SLC, 4-CH (0 ~ 70 °C)
SQF-SLMS4-XG-S9E	SQFlash 630 series SATA Slim 4/8/16/32/64 GB SLC, 4-CH (-40 ~ 85 °C)
SQF-SLMU4-XG-S9C	SQFlash 630 series SATA Slim Ultra MLC, DMA, 8/16/32/64/128 GB (0 ~ 70 °C)
SQF-SLMU4-XG-S9E	SQFlash 630 series SATA Slim Ultra MLC, DMA, 8/16/32/64/128 GB (-40 ~ 85 °C)
SQF-SLMM1-4G-S9C	SQFlash 630 series SATA Slim 4 GB MLC, 1-CH (0 ~ 70 °C)
SQF-SLMM1-4G-S9E	SQFlash 630 series SATA Slim 4 GB MLC, 1-CH (-40 ~ 85 °C)
SQF-SLMM2-8G-S9C	SQFlash 630 series SATA Slim 8 GB MLC, 2-CH (0 ~ 70 °C)
SQF-SLMM2-8G-S9E	SQFlash 630 series SATA Slim 8 GB MLC, 2-CH (-40 ~ 85 °C)
SQF-SLMM4-XG-S9C	SQFlash 630 series SATA Slim 16/32/64/128/256 GB MLC, 4-CH (0 ~ 70 °C)
SQF-SLMM4-XG-S9E	SQFlash 630 series SATA Slim 16/32/64/128/256 GB MLC, 4-CH (-40 ~ 85 °C)

Note: X stands for different capacities

Ordering Information

PN	Description
SQF-S10S1-1G-S9C	SQFlash 630 series CFast SLC, DMA, 1 GB (0 ~ 70 °C)
SQF-S10S1-1G-S9E	SQFlash 630 series CFast SLC, DMA, 1 GB (-40 ~ 85 °C)
SQF-S10S2-XG-S9C	SQFlash 630 series CFast SLC, DMA, 2/4/8/16/32 GB (0 ~ 70 °C)
SQF-S10S2-XG-S9E	SQFlash 630 series CFast SLC, DMA, 2/4/8/16/32 GB (-40 ~ 85 °C)
SQF-S10U2-XG-S9C	SQFlash 630 series CFast Ultra MLC, DMA, 4/8/16/32/64 GB (0 ~ 70 °C)
SQF-S10U2-XG-S9E	SQFlash 630 series CFast Ultra MLC, DMA, 4/8/16/32/64 GB (-40 ~ 85 °C)
SQF-S10M1-4G-S9C	SQFlash 630 series CFast MLC, DMA, 4 GB (0 ~ 70 °C)
SQF-S10M1-4G-S9E	SQFlash 630 series CFast MLC, DMA, 4 GB (-40 ~ 85 °C)
SQF-S10M2-XG-S9C	SQFlash 630 series CFast MLC, DMA, 8/16/32/64/128 GB (0 ~ 70 °C)
SQF-S10M2-XG-S9E	SQFlash 630 series CFast MLC, DMA, 8/16/32/64/128 GB (-40 ~ 85 °C)

Note: X stands for different capacities

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Drives - SSD category](#):

Click to view products by [Advantech manufacturer](#):

Other Similar products are found below :

[MTFDDAK256MAZ-1AE12ABYY](#) [SSDSC2CT120A3K5](#) [MTFDDAC512MAM-1K1](#) [SSDPEKKF010T7X1](#) [ATCA7360-MMOD-SATA2](#)
[SQF-S25S2-8G-S9C](#) [SQF-SLMM4-128G-S9C](#) [96FD25-S128-TR7](#) [SQF-SMSS4-32G-S8E](#) [96FD25-S512-TR7](#) [SQF-SLMM4-16G-S9E](#) [SQF-](#)
[SDMS4-16G-J6C](#) [SQF-S25S4-16G-S9C](#) [96FD80-N128-LIS](#) [ASD25-MLC064G-CT-160-1](#) [SQF-SMSU4-32G-S9E](#) [SQF-SMSU4-256G-SBE](#)
[SQF-SMSM4-32G-S9E](#) [SQF-SMSM2-8G-S9E](#) [SQF-SHMS2-16G-S9C](#) [96ND1T-ST-SG7E](#) [SQF-SMSM4-128G-SBE](#) [SQF-SMSM2-32G-SBE](#)
[SQF-S25U4-128G-SBC](#) [96FD-M032-TR71](#) [SQF-SHMM1-32G-SBC](#) [SSDSC2BX800G401940785](#) [SSDSCKJB150G701](#) [SDUFD33-016G](#)
[SD7SN6S-128G-1122](#) [AF512UDI-FLU003](#) [SDLF1DM-800G-1HA1](#) [SM619GED-CDZ SPA31L](#) [SD9SN8W-128G-1122](#) [SD9SN8W-128G](#)
[MTFDDAA120MBB-2AE1ZABYY](#) [SSDSC2KR120H6XN](#) [SDSDQAD-128G](#) [SM668GXB-ACS O1118](#) [SDSDAA-016G](#) [SDLF1CRM-016T-](#)
[1HA1](#) [0T00327](#) [MTFDDAA240MBB-2AE1ZABYY](#) [SSDSC2BX200G401940779](#) [SQF-S25V4-240G-SCC](#) [SQF-SDMM2-256G-S9E](#) [SQF-](#)
[SHMM2-64G-SBE](#) [APSDM001G12AN-PT](#) [SQF-SM8V4-240G-SCC](#) [96FD25-ST512G-M13](#)