
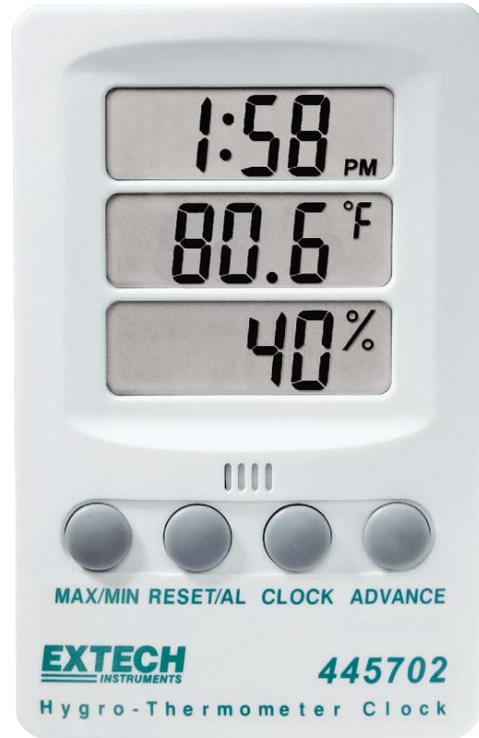


Hygro-Thermometer Clock

 **Triple display with Clock, Temperature and Humidity**
With user settable clock alarm

Features:

- Attractive design for desktop or wall mounting
- Three LCD displays of Time, Temperature and Humidity
- Max/Min memory with reset for Temperature and Humidity
- Switchable °C or °F temperature display
- 12/24 hour Clock with alarm function
- Complete with built-in tilt stand, wall mounting bracket and AAA battery



Specifications:	445702
Humidity range	10 to 85%
Basic RH accuracy	± 6%
Temperature range	14 to 140°F (-10 to 60°C)
Basic Temperature Accuracy	1.8°F/1°C
Dimensions	4.3 x 2.8 x 0.8" (109 x 71 x 20mm)
Weight	4oz (113g)

Ordering Information:

445702Hygro-Thermometer Clock
409992Vinyl Pouch Carrying Case



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [S-11](#) [FLUKE-LDG](#) [382153](#) [FM100](#) [RH210](#) [382253](#) [MO290-P](#)
[GEO-CABLE-REEL-50M](#) [T197914](#) [RD300-L](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [IR31CE](#) [IR32BC](#) [IR33BC](#) [MP7217TC](#) [NGM-1](#) [SGX-](#)
[7NH3](#) [UT381](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-NmHc-100](#) [3.000.401](#) [AX-7535](#) [CS-9S6SS-A](#) [P 2800 A](#) [P 2801](#) [P 2802](#) [P 5039](#) [P 5130](#) [P](#)
[5055](#) [P 5060](#) [P 5065](#) [P 5086](#) [P 5090](#) [P 5110](#) [P 5115](#) [P 5135](#) [P 5140](#) [P 5145](#) [P 5150](#) [P 5160](#)