

EKI-2726FHPI

**4G+2 SFP W/ 4 IEEE 802.3
High Power PoE Industrial
Wide Temperature Switch**

NEW



Features

- All Gigabit Ethernet ports for 4 Copper and 2 SFP
- Back-plane (Switching Fabric): 12Gbps
- Embedded 4 ports PoE inject function
- Provide 30W at 55V power output
- Redundant Power Design
- IP30 Chassis Design
- Supports operating temperatures from -40 ~ 75°C

Introduction

The EKI-2726 FHPI switch has 4 x 10/100/1000BASE-T Ethernet ports with PoE+ function and 2 x SFP sockets, it has been designed to work within a wide operating temperature range. This cost-effective solution, meets the high reliability requirements and demands of industrial applications. The equipment also meets the IEEE 802.3 at standard and can provide 30Watts output per PoE port.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab, 802.3z
- **LAN** 10/100/1000Base-T
1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- **Connectors** 10/100/1000T(X): RJ-45*4
SFP: Gigabit Base *2
- **LED Indicators** System: P1, P2, P-Fail,
Per port: Link/Activity, Speed, PoE (1 to 4 ports)

Power

- **Power Consumption** 5.5 watts @48V_{DC} (Ethernet only)
- **Power Input** 48 V_{DC} (44V_{DC} to 57 V_{DC}), redundant dual inputs
- **Fault Output** 1 Relay Output

Mechanism

- **Dimensions (W x H x D)** 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload Current** Present

Environment


- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **MTBF** 339,740

Certification

- **Safety** UL/cUL508
Class I, Division 2, Groups A, B, C and D
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: [mm]

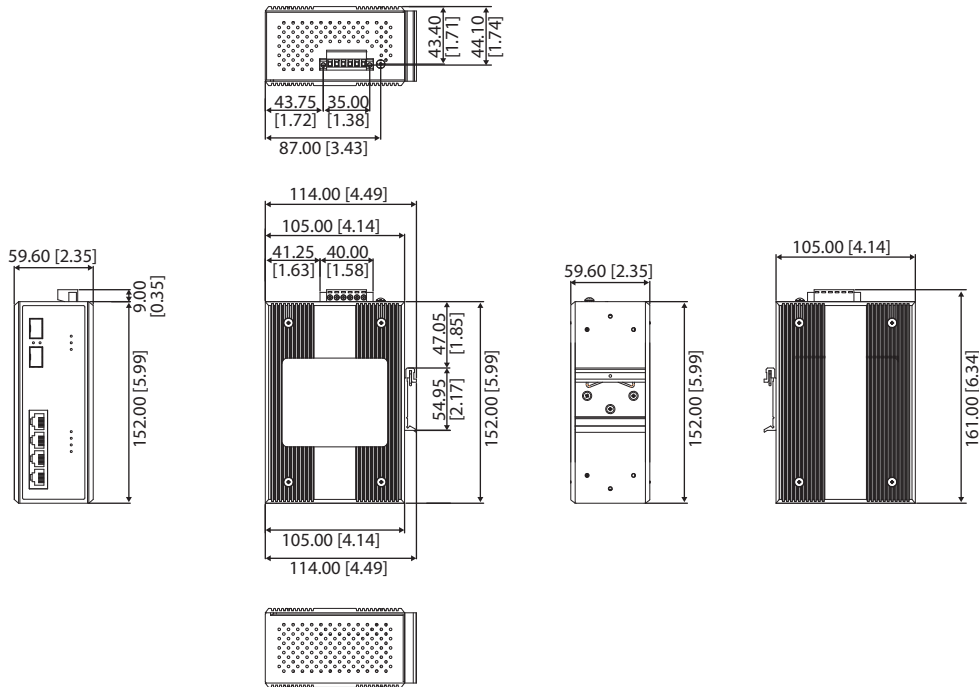

Panel Cut-out Dimensions: 114.00 x 152.00 x 59.60 mm (4.49" x 5.99" x 2.35")

Ordering Information

- EKI-2726FHPI 4G+2 SFP Unmanaged Gigabit Switch with 4-port PoE+(IEEE 802.3af/at)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)