

3.3V, Low Profile SMD VCXO



Model: VCSAXT Series

RoHS Compliant / Pb Free

Rev. 10/19/2010

Page 1 of 1

FEATURES

- 3.3V Operation
- HCMOS Output
- Enable/Disable
- Tape and Reel (2,000 pcs. STD)

OPTIONS

- Many Stability/Pullability Options
- -40°C ~ +85°C Option ('R' Version)

• PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Stability ¹	Frequency Pullability(Min)	Operating Temperature	Frequency
421-Frequency-xxxxx	VCS12AXT	±25PPM	±50PPM	-10 ~ +70(°C)	1.000~80.000
437-Frequency-xxxxx	VCS12AXTR ³	±25PPM	±50PPM	-40 ~ +85(°C)	1.000~80.000
422-Frequency-xxxxx	VCS15AXT	±50PPM	±50PPM	-10 ~ +70(°C)	1.000~80.000
439-Frequency-xxxxx	VCS15AXTR	±50PPM	±50PPM	-40 ~ +85(°C)	1.000~80.000
423-Frequency-xxxxx	VCS22AXT	±25PPM	±100PPM	-10 ~ +70(°C)	1.000~80.000
443-Frequency-xxxxx	VCS22AXTR ³	±25PPM	±100PPM	-40 ~ +85(°C)	1.000~80.000
424-Frequency-xxxxx	VCS25AXT	±50PPM	±100PPM	-10 ~ +70(°C)	1.000~80.000
445-Frequency-xxxxx	VCS25AXTR	±50PPM	±100PPM	-40 ~ +85(°C)	1.000~80.000
425-Frequency-xxxxx	VCS20AXT	±100PPM	±100PPM	-10 ~ +70(°C)	1.000~80.000
441-Frequency-xxxxx	VCS20AXTR	±100PPM	±100PPM	-40 ~ +85(°C)	1.000~80.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.000 ~ 80.000 ⁴ MHz
Storage Temperature Range (T _{STG})	-40°C ~ +85°C
Supply Voltage (V _{DD})	3.3V ± 10%
Control Voltage (V _c)	1.65V ± 1.5V
Input Current (I _{DD})	
1.000 ~ 30.000 MHz	15mA
30.000+ ~ 45.000 MHz	25mA
45.000+ ~ 80.000 MHz	50mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time (10% ~ 90% V _{DD}) (T _r)	5nS
Fall Time (90% ~ 10% V _{DD}) (T _f)	5nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	4.0mA Min
(I _{OH})	-1.0mA Min
Output Load (HCMOS)	15pF
Start-up Time (T _s)	10mS
Enable/Disable Time ²	150nS
Frequency Linearity	±10%
Modulation Bandwidth	20 kHz

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, vibration, and V_c = 1.65V.

² An internal pullup resistor from pin 2 to pin 6 allows active output if pin 2 is left open.


³ Available on an individual inquiry basis.

⁴ Custom specifications from 45.000 to 80.000 MHz available on an individual inquiry basis.

Note: A 0.01μF bypass capacitor should be placed between V_{DD} (Pin 6) and GND (Pin 3) to minimize power supply line noise.

Note: An alternate pin connection with E/D on pin #5 is available.

All specifications subject to change without notice.

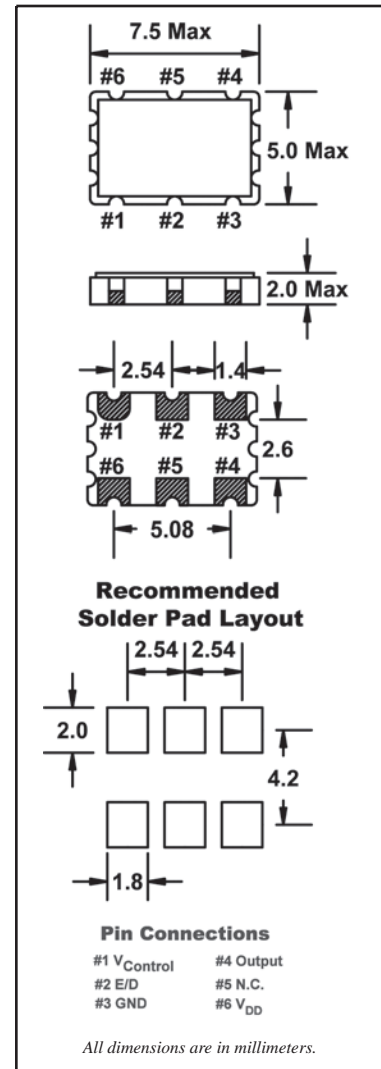

• ENABLE / DISABLE FUNCTION

INH (Pin 2)	OUTPUT (Pin 4)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [VCXO Oscillators](#) category:

Click to view products by [Fox](#) manufacturer:

Other Similar products are found below :

[KD-VA9501](#) [ASG-P-V-A-491.520MHz](#) [SIT3808AI-CF-33EM-50.000000X](#) [EQVA23C1C1H-50.000M](#) [603281](#) [YNETHE125](#) [FRSONT019](#)
[SiT3701AC-43-33C-10.00000X](#) [SiT3808AI-2F-25NM-4.915200X](#) [315LB3I1250T](#) [VG-4231CE](#) [27.0000M-PSCM3](#) [CVPD-922X-100.000](#)
[FY3HCJM45.1584-BULK](#) [CVSS-945-125.000](#) [ASVV-4.096 MHz-L50-N152-T](#) [565DFA45M1500ABG](#) [565CFA45M1584ABG](#)
[569DABA001908BBG](#) [569BAAA001478ABG](#) [565AAA1000M00BBG](#) [565CAA11M0592BBG](#) [565BAA100M000ABG](#) [CVHD-950-122.880](#)
[CVHD-950-70.000](#) [CVHD-950-80.000](#) [CVHD-950X-100.000](#) [CVHD-950X-122.88](#) [CVHD950X-54.000](#) [CVPD-920-100.000](#)
[515CAA000256AAG](#) [550AE100M000DG](#) [MK3722GLFTR](#) [CVHD-950X-50.000](#) [ABLJO-V-122.880MHZ-T2](#) [PL500-37TI](#)
[KV7050B27.0000C3GD00](#) [VCS25AXT-270](#) [27.000MHZ](#) [357LB3I032M7680](#) [357LB3I040M0000](#) [KV7050B25.0000C3GD00](#)
[357LB3I016M3840](#) [CVHD-950-76.800](#) [CVSS-945-50.000](#) [KV7050B40.0000C3GD00](#) [EV32C6A3A1-24.576M-TR](#) [LFVCXO067516Bulk](#)
[ECXV-L37C2N-148.500](#) [LFVCXO067414Bulk](#) [LFVCXO067507Bulk](#) [VS-501-0074-1000M0](#)