

# EKI-2525M/S

## 4+1 100FX Port Unmanaged Industrial Ethernet Switch



### Features

- Provides 4 x 10/100 Mbps Ethernet ports with RJ45 connector
- Provides 1 x 100 Mbps Multi-mode SC type fiber optic port (EKI-2525M)
- Provides 1 x 100 Mbps Multi-mode ST type fiber optic port (EKI-2525M-ST)
- Provides 1 x 100 Mbps Single-mode SC type fiber optic port (EKI-2525S)
- Supports full/half duplex flow control
- Supports MDI/MDI-X auto crossover
- Provides broadcast storm protection
- Provides redundant 12 ~ 48 V<sub>DC</sub> power input
- Provides flexible mounting: DIN-rail and Wall mount

### Introduction

EKI-2525M/2525S are industrial-grade Ethernet switches that enable you to expand your industrial network fast and cost-effectively. The EKI-2525M/2525S have four 10/100 Mbps Ethernet ports, and additionally the EKI-2525M provides one multi-mode fiber-optic ports, while the EKI-2525S provide one single-mode fiber-optic ports. Using fiber-optics, you can prevent noise from interfering with your system and supports high-speed (100 Mbps) and high-distance (up to 30 km) transmissions.

EKI-2525M/2525S have industrial-grade designs, assuring high reliability and stability in harsh environments, making it a robust bridge between enterprise fiber-optic backbones and Ethernet devices. EKI-2525M/2525S includes a switch controller that can automatically sense transmission speeds. The RJ45 interface can also be autodeTECTED, so MDI or MDI-X is automatically selected and a crossover cable is not required. All the Ethernet ports have memory buffers that support the store and forward mechanism, assuring all data is transmitted properly.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T (X), 100Base-FX
- **Transmission Distance** Ethernet: Up to 100 m  
Multi-mode Fiber: Up to 2 km (EKI-2525M)  
Single-mode Fiber: Up to 30 km (EKI-2525S)
- **Transmission Speed** Up to 100 Mbps

#### Optical Fiber

- **Multi-Mode** (EKI-2525M)  
Wavelength: 1310nm  
Tx Power: -14/-20 dBm  
Rx Sensitivity: -31 dBm  
Parameters: 50/125  $\mu$ m, 62.5/125  $\mu$ m
- **Single-Mode** (EKI-2525S)  
Wavelength: 1310 nm  
Tx Power: -8/-15 dBm  
Rx Sensitivity: -34 dBm  
Parameters: 9/125  $\mu$ m

#### Interface

- **Connectors** 4 x RJ45 ports  
1 x SC type fiber connector (EKI-2525M/S) or  
1 x ST type fiber connector (EKI-2525M-ST)  
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** P1, P2, P-Fail  
10/100TX: Link/Activity, Duplex/Collision

#### Power

- **Power Consumption** Max. 5 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.52" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present


#### Environment

- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 382,904 hours

## Dimensions

Unit: mm

### EKI-2525M/S

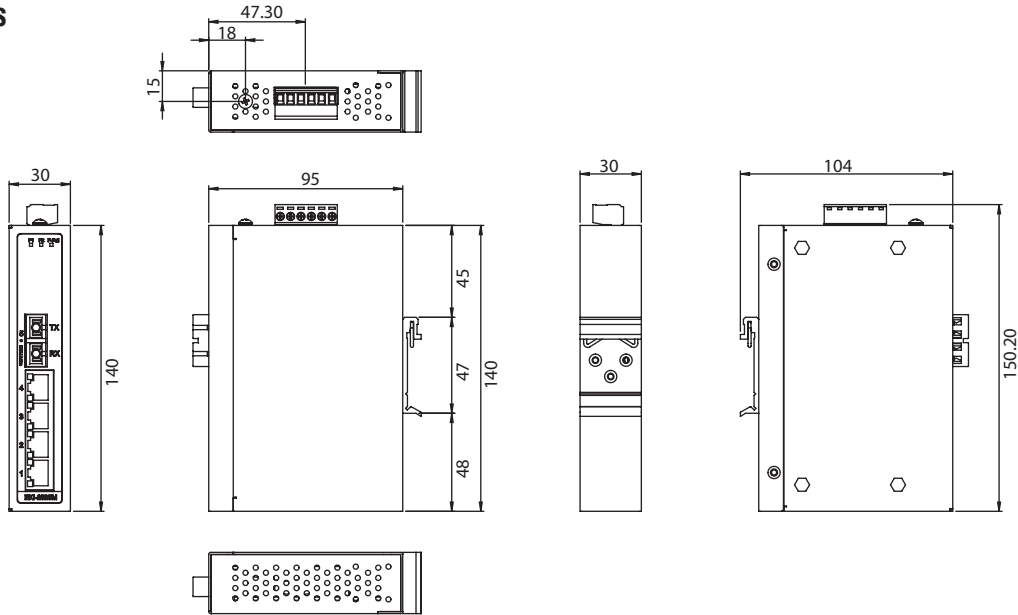

**Panel Cut-out Dimensions: 104 x 140 x 30 mm (4.1" x 5.51" x 1.18")**

### Certification

- **Safety** EKI-2525M-ST/EKI-2525S: UL/cUL 60950  
EKI-2525M: UL/cUL 60950 Class I, Division 2, Groups A, B, C and D
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMs** EN 61000-4-2, EN 61000-4-3, EN 61000-4-4  
EN 61000-4-5, EN 61000-4-6, EN 61000-4-8
- **Shock** IEC60068-2-27
- **Freefall** IEC60068-2-32
- **Vibration** IEC60068-2-6

### Ordering Information

- **EKI-2525M-BE** 4-port Ethernet Switch w/ 1-port 100FX Multi-mode
- **EKI-2525M-ST-BE** 4-port Ethernet Switch w/ 1-port 100FX Multi-mode (ST type connector)
- **EKI-2525S-AE** 4-port Ethernet Switch w/ 1-port 100FX Single-mode

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)  
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)  
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)  
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)  
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)  
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)