



Multilayer Antenna

For 5150-5950MHz

ANT165550ST-1003A1

1.6x0.8mm [EIA 0603]*

* Dimensions Code JIS[EIA]




Multilayer Antenna


For 5150-5950MHz

Conformity to RoHS Directive

ANT165550ST-1003A1


SHAPES AND DIMENSIONS

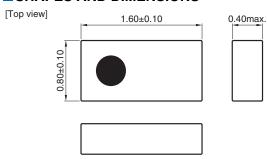

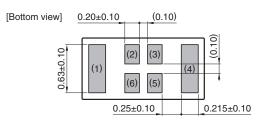


Dimensions in mm

■ RECOMMENDED LAND PATTERN



Dimensions in mm

SOLDER RESIST PATTERN



Dimensions in mm

OROHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

Terminal functions

1 Dummy pad

2 Feed point

3 Feed point

4 Radiator electrode

5 Feed point


6 Feed point

^{*}Terminal (2),(3),(5) and (6) :Connected in inner structure


[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

EVALUATION BOARD

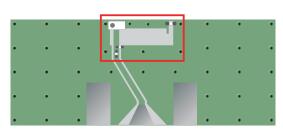


PCB size: 25mm x 10mm x 1mm Antenna area: 6 x 2.5 mm

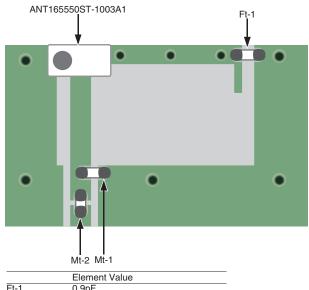

	Element Value	
Ft-1	0.9pF	
Mt-1	0.1pF	
Mt-2	0.5pF	

☐ Measurement condition for Radiation Pattern

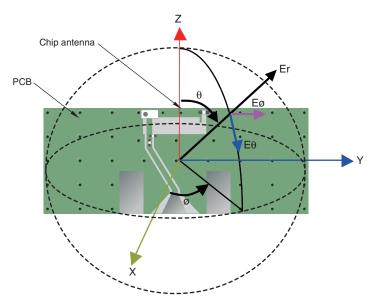

- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.	
VSWR	5150 to 5950	_	1.60	3.0	
Antenna Gain (dBi)**	5150 to 5950	_	2.6	_	
Polarization			Linear		
PCB size (mm)			25×10		
Antenna keep-out area (mm)			6×2.5		
Characteristic Impedance (Ω)			50 (Nominal)		


[·] This is typical antenna performance with the standard PCB.

■TEMPERATURE RANGE

Operating temperature	Storage temperature
(°C)	(°C)
-40 to +85	-40 to +85

FREQUENCY CHARACTERISTICS

EFFICIENCY AND VSWR

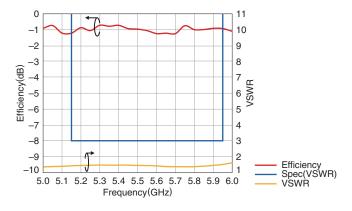

• Tested antenna has been soldered. Evaluation board size is 25x10x1 mm.

^{**} Reference value


[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



RADIATION PATTERNS

□5GHz BAND

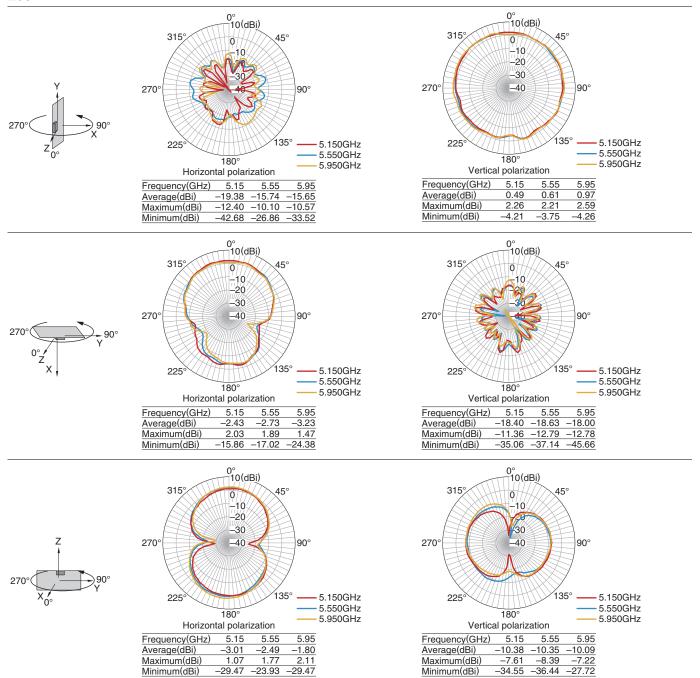



• Tested antenna has been soldered. Evaluation board size is 25x10x1 mm.


- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

■ RADIATION PATTERNS (TOTAL POWER)

□5GHz BAND

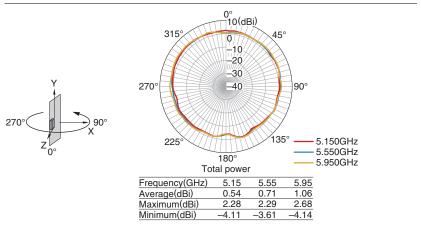

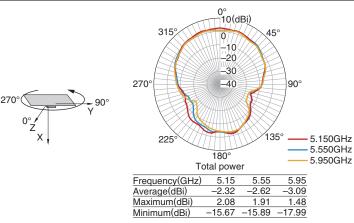

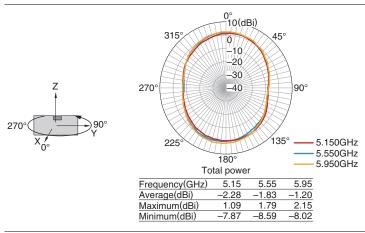


• Tested antenna has been soldered. Evaluation board size is 25x10x1 mm.


- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.



■PACKAGING STYLE


□REEL DIMENSIONS

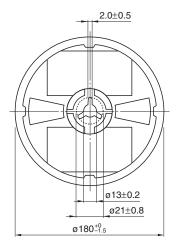



Dimensions in mm

TAPE DIMENSIONS

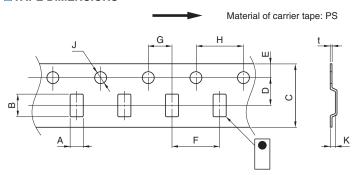

Dimensions in mm

Α	В	С	D	Е	F	G	Н	J	K	t
0.97±0.05	1.8±0.05	8.0±0.2	3.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.1	1.5+0.1/-0	0.55max.	0.25±0.05

■ PACKAGE QUANTITY


Standard package quantity
(pieces/reel)
4,000

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



■ RECOMMENDED REFLOW PROFILE

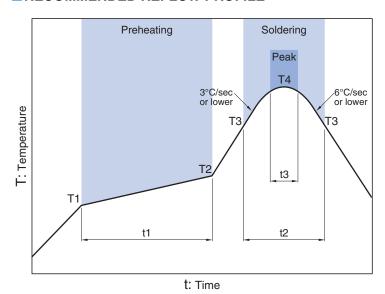

Preheating			Soldering Critical zone (T3 to T4) Peak			
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30sec max

 $^{^{\}ast}\,\text{t3}$: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

[•] Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by TDK manufacturer:

Other Similar products are found below:

CCT FM1 ABFT AD-NM-SMAF 001-0021 CTC110 MAF94149 EXE902SF MMCX-SMA-100 PDQ24496-91NF GAN30084EU 930-033-R A08-HABUF-P5I AAF95035 DG-ANT-20DP-BG-B APAMPGJ-141 1513563-1 OF86315-FNF OP24516DS-91NM A09-HASM-7 EXE902MD EXE902SM SPDA17806/2170LAR APAMPG-117 GPS1575SP26-004 GPS15MGSMA CMD69273P-30NF CMQ69273-30NF RD2458-5-OTDR-NM RD2458-5-RSMA TRAB24/49003 W4120ER5000 W6102B0100 YE572113-30RSMM 108-00014-50 SPDA17RP918 OP24516SX-91NM OP24516SX-91RSMM CMQ69273P-30NF CMS69273-30NF CMS69273P-30NF TRAB24003N TRAB8213NP TRAB8903 A09-Y8NF A09-Y11NF A09-HSM-7 A09-F8NF-M A09-F5NF-M