

Quick Reference Guide: Interconnects for the IEEE 1394 Standard

This product conforms to the IEEE 1394 Standard. With only one type of connector, you can connect several different pieces of digital peripheral equipment. The IEEE 1394 Standard connector series is capable of accommodating data rates up to 400 Mbps for serial transmission consisting of 6 position connectors, for connections of computers to peripherals, and the 4 position connectors for connections of digital AV equipment. For connections of computers to digital AV equipment, 4 position to 6 position transition type cable assemblies are used. In order to cope with a wide range of device designs, headers of 4 position connectors are suitable for DVD, STB, etc., and are provided with screw thread size of M1.6, and are available in DIP and SMT types. Cable assemblies are also available in 4 position to 4 position type for connection of AV equipment, 4 position to 6 position transition type for connections of PC and AV equipment, and 6 position type for connections of PC and peripherals.

FEATURES AND BENEFITS

- Conforms to IEEE 1394 Standards (4 position, 6 position)
- Easy connections to equipment (4 position, 6 position)
- For use with plug and play devices
- Panel mounting screw thread sizes of PC board side are of M1.6 and M2.1 (4 position)
- DIP types and SMT types are available for PC board side (4 position, 6 position)
- Applicable for automatic mounting machines with embossed tapes (4 position)
- FPC is also applicable to the 4 position connectors

PRODUCT APPLICATIONS

- Cameras
- Camcorders
- Scanners
- Printers
- DVD Players
- Set-Top Boxes
- Computer Monitors
- Audio Video ReceiversHard Drives
- Audio Recording Devices

IEEE 1394 Standard is a trademark of the Institute of Electrical and Electronics Engineers, Inc. and licensed to the IEEE 1394 Standards Association.

http://www.tycoelectronics.com/products/IEEE1394




Interconnects for the IEEE 1394 Standard




PRODUCT SIZES


4 Position



6 Position



9 Position



IEEE 1394 STANDARD - USB INTERCONNECTS COMPARISON CHART

| | IEEE 1394 Standard | USB 2.0 Interconnects |
|-----------------------------|---|--|
| Printed Data Rate | 400 Mbps | 480 Mbps |
| Sustained Data Rate (Read) | 38 MB/s | 33 MB/s |
| Sustained Data Rate (Write) | 35 MB/s | 27 MB/s |
| Cycle Life | 1000 cycles (4 Position) 1500 cycles (6 Position) | 1500 cycles |
| Architecture | Peer to Peer | Master / Slave |
| Advantages | Well suited to accommodate multimedia devices | Lower cost, standard on most computers |
| Drawbacks | Higher cost, not standard on personal computers | Must be used in conjuction with a computer |

4 POSITION

| | Part Number | Gender | Orientation | Board Mount | Tail Length | Feature |
|----------|-------------|------------|-------------|---------------|-------------|--------------|
| | 353388-1 | Receptacle | Right Angle | Through Hole | 2.00 | Flange M1.6 |
| | 1-1734056-1 | Receptacle | Right Angle | Through Hole | 2.60 | Boss |
| 353388 | 1-1734056-2 | Receptacle | Right Angle | Through Hole | 2.60 | Without Boss |
| 3/ | 1123843-1 | Receptacle | Right Angle | Surface Mount | 3.85 | Flange M1.6 |
| 1123843 | 1318141-1 | Receptacle | Right Angle | Surface Mount | N/A | Flange Ø2. |
| 1123843 | 1318140-1 | Receptacle | Right Angle | Surface Mount | N/A | Without Boss |
| 07/5/310 | 1674260-1 | Receptacle | Right Angle | Through Hole | 2.80 | Stacked |
| | 1318714-1 | Receptacle | Vertical | Through Hole | 2.00 | Flange M1.6 |
| 1674260 | 1734681-1 | Receptacle | Edge Mount | Through Hole | 2.00 | |
| | 1734194-1 | Receptacle | Edge Mount | Surface Mount | N/A | |
| 1318714 | 1717700-1 | Plug Kit | Plug Kit | N/A | N/A | N/A |

PRODUCT SPECIFICATION: 108-5157

Note: All part numbers are RoHS compliant. All dimensions in mm unless otherwise stated.

Interconnects for the IEEE 1394 Standard



6 POSITION

| | Part Number | Gender | Orientation | Board Mount | Tail Length | Color |
|---------|-------------|------------|-------------|---------------|-------------|---------|
| | 5788516-1 | Receptacle | Right Angle | Through Hole | 2.00 | Black |
| 5788516 | 1734368-1 | Receptacle | Right Angle | Surface Mount | SMT | Black |
| U | 1734368-2 | Receptacle | Right Angle | Surface Mount | SMT | Natural |
| 1734290 | 1734290-1 | Receptacle | Vertical | Through Hole | 2.69 | Black |
| 70 (3 | 1734290-2 | Receptacle | Vertical | Through Hole | 3.18 | Black |
| 5787956 | 5787956-1 | Receptacle | Flag | Through Hole | 3.36 | Black |
| 5787950 | 5787950-1 | Plug Kit | Cable Plug | N/A | N/A | Gray |

PRODUCT SPECIFICATION: 108-1606

9 POSITION

| | Part Number | Gender | Orientation | Board Mount | Tail Length | Color |
|---------|-------------|------------|-------------|---------------|-------------|-------|
| | 1734047-1 | Receptacle | Right Angle | Surface Mount | SMT | Black |
| 1734047 | 1775021-1 | Plug Kit | Cable Plug | N/A | N/A | Black |

PRODUCT SPECIFICATION: 108-57567

CABLE ASSEMBLIES

| | Base Number | Available Lengths (m) |
|--------------------------|--------------------|------------------------|
| 4 Position to 4 Position | 1123076 6324771 | 0.5 - 4.5 0.3 - 0.5 |
| 4 Position to 6 Position | 6324771 1324770 | 0.7 - 4.5 0.3 - 0.5 |
| 6 Position to 6 Position | 1324770 | 0.7 - 4.5 |

Note: All part numbers are RoHS compliant. All dimensions in mm unless otherwise stated.

Interconnects for the IEEE 1394 Standard

QUESTIONS TO ASK AT DESIGN IN


- What is the standard data transfer rate for Interconnects for the IEEE 1394 Standard?
 Interconnects for the IEEE 1394 Standard can achieve data transfer rates of up to 400Mbps.
- What are the differences between IEEE 1394 and USB?
 See IEEE 1394 Standard USB Interconnects Comparison
 Chart on page 2.
- There are only base numbers listed in the Cable Assembly section, how do I find the exact part number? The part numbers for IEEE 1394 Standard cable assemblies are based on cable length. For more details go to www.tycoelectronics.com. You will find Interconnects for the IEEE 1394 Standard by selecting cable assemblies and then copper industry standard.

YOU ARE HERE (E-CATALOG)

Link

http://www.tycoelectronics.com/products/IEEE1394

Breakdown From Main Page

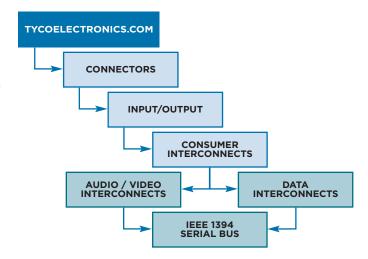

Disclaimer

While Tyco Electronics has made every reasonable effort to ensure the accuracy of the information in this catalog, Tyco Electronics does not guarantee that it is error-free, nor does Tyco Electronics make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current.

Tyco Electronics reserves the right to make any adjustments to the information contained herein at any time without notice. Tyco Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose.

The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Please consult Tyco Electronics for the latest dimensions and design specifications.

Restriction on the use of Hazardous Substances (RoHS)

At Tyco Electronics, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant — Part numbers in this catalog are RoHS Compliant, unless marked otherwise. These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

NOTE: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

NOTE: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced at right.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above
- So whatever your questions when it comes to RoHS, we've got the answers at www.tycoelectronics.com/leadfree



© 2008 Tyco Electronics Corporation. All Rights Reserved.

TE LOGO and TYCO ELECTRONICS are trademarks. Other products, logos and company names mentioned herein may be trademarks of their respective owners.

IEEE 1394 Standard is a trademark of the Institute of Electrical and Electronics Engineers, Inc. and licensed to the IEEE 1394 Standards Association.

Dimensions are in millimeters with inches (if shown) in brackets. Specifications subject to change. For more information, contact your Tyco Electronics sales engineer at the numbers listed below, or visit our Website at: http://www.tycoelectronics.com.

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 01-800-733-8926 5-1773453-9-2.5K-FP-LUG-11/08 C. America: 52-55-1106-0803 S. America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 31-73-6246-431



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for IEEE 1394 Connectors category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

EHFF2 EHFF2B EHFWX2BX 3E106-2220KV 3E106-2230KV 53460-0619 3E106-0220KV 3E206-0100KV 1734290-2 53460-0629

53462-0629 NA1394-6-W 5788516-1 3E306-3200-008 FWF21NSCC FWFODE FWFTV22G FWFTVC2G FWFTVC2N JE18 PX0419

PX0847 693-006-699-003 928 929 930 45740-0001 53462-0001 53984-0681 NA1394-6-W-B EHFW800X2 EHFW800X2B

EHFW800X2PKG 1734290-1 5787956-1