




CFM12S SERIES

12 WATT SINGLE OUTPUT AC-DC OPEN FRAME



Features

- * Universal Input 90~264VAC
- * High Efficiency up to 84%
- * Meets EN55032 Class B and CIRSS/FCC Class B
- * Approved IEC62368-1, UL62368-1
- * Meets EN60335-1
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * No load input power < 75mW
- * Class II

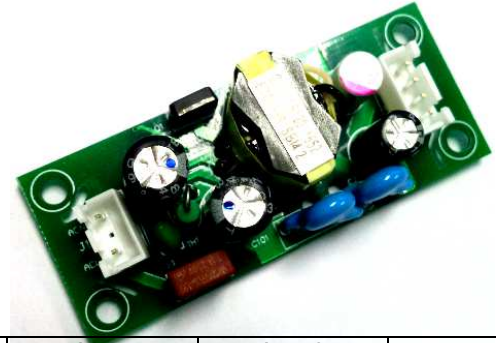

Ordering information

CFM12SXXX - X

Blank: PCB mount

E: Encapsulated

T: WAFER

MODEL	Output Voltage	Output Current	Ripple (mV p-p) NOTE 1	Voltage Accuracy NOTE 2	Line Regulation NOTE 3	Load Regulation NOTE 4	% EFF. (typ.)
CFM12S050	5V	2A	100mV	±2%	±1%	±1%	79%
CFM12S090	9V	1.34A	100mV	±2%	±1%	±1%	83.26%
CFM12S120	12V	1.0A	120mV	±2%	±1%	±1%	83.26%
CFM12S150	15V	0.8A	150mV	±2%	±1%	±1%	83.26%
CFM12S240	24V	0.5A	240mV	±2%	±1%	±1%	83.26%

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 47 to 63Hz
 Inrush Current 50A max. @240Vac, Cold Start @25°C
 Leakage Current 0.25mA max. @ 264Vac
 Input Current 0.4A max.

OUTPUT SPECIFICATIONS:


Holdup Time 10ms typ. @115Vac
 Short Circuit ProtectionHiccup Mode (Auto Recovery)
 Temperature Coefficient ±0.05% / °C
 Over Voltage ProtectionHiccup Mode(Auto Recovery)
 Startup time <3.0s

GENERAL SPECIFICATIONS:

Isolation Voltage(Input to Output) 3000VAC:
 Operating Temperature..... -30°C~70°C (Derating from 50°C to 70°C)
 Storage Temperature -40°C~85°C
 Cooling Natural Convection
 Humidity 93% RH max. Non condensing
 Switching Frequency 65KHz Typical
 MTBF MIL-HDBK-217F, GB, 25°C/115VAC 450Khrs min.
 Altitude 5000m
 Dimensions 1.500x1.000x0.764inches (38.10x25.40x19.40mm)
 -E: 1.600x1.1x0.772 Inches (40.64x27.94x19.60 mm)
 -T: 2.150x1.000x0.681 Inches (63.50x25.40x17.30 mm)
 Weight 16g, (-E): 40g, (-T): 17g

CFM12S Series De-rating Curve

Derating curve:

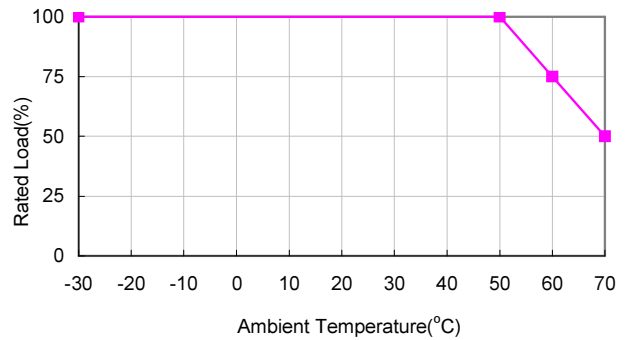

SAFETY AND EMISSION:


Emission and Immunity..... EN55032 Class B, EN55024, EN61204-3,
 EN61000-3-2, EN6100-3-3,
 EN61000-6-1, EN61000-6-3.
 47 CFR FCC Part 15 Subpart B (Class B)
 Safety IEC62368-1, UL62368-1, IEC60950-1, UL60950-1

NOTE:



1. Voltage accuracy is set of 100% rated load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measuring @20MHz BW.
3. Line regulation is measured from high line to low line with full load.
4. Load regulation is measured from 10% to 100% full load.
5. T Version wafer with JST B3B-XH / B4B-XH and mate with JST housing XH series or equivalent..

Mechanical Specification

All Dimensions In Inches[mm]
 Tolerance Inches:x.xxx= ± 0.02
 Millimeters: x.xx = ± 0.5

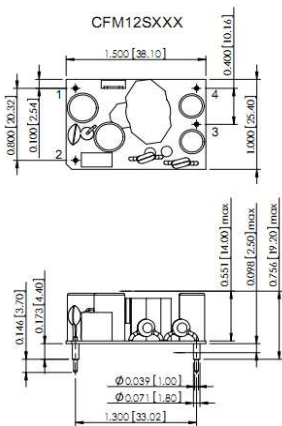

PIN CONNECTION	
Pin	Function
1	ACN
2	ACL
3	-Vout
4	+Vout

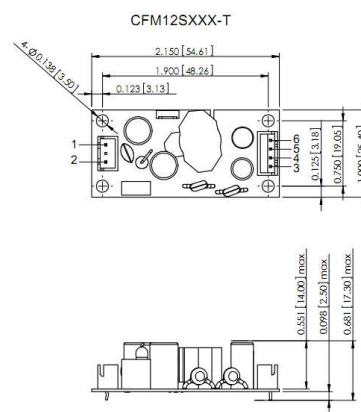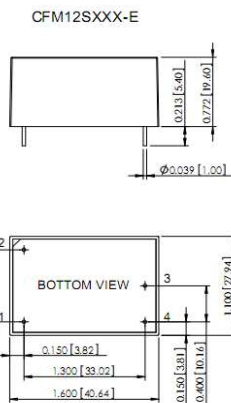

PIN CONNECTION	
Pin	Function
1	ACN
2	ACL
3	-Vout
4	-Vout
5	+Vout
6	+Vout

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [40370121910](#) [LDIN5075](#) [WRB01X-U](#) [LPX140-C](#) [08-30466-](#)
[1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#) [LPM000-](#)
[BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-1219-18S](#) [6504-226-2101](#)
[CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#) [VI-](#)
[RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#) [BWB24SX-U](#)