
3M[™] Pin Strip Header

2.54 mm and 2.54 mm x 2.54 mm, Dual Insulator, Straight, Solder Tail

961 Series

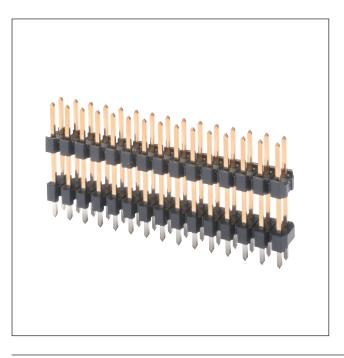

- High temperature dielectric
- "No lead" wave and reflow solder compatible
- End stackable feature
- Single- and dual row version
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the RoHS compliance section of www.3Mconnectors.com for compliance information (RIA E1 & C1 apply)

Date Modified: November 26, 2012

TS-2185-C Sheet 1 of 2

Physical

Insulation

Material: High Temperature Thermoplastic

Flammability: UL 94V-0 Color: Black

Contact

Material: Copper Alloy

Plating

Underplating: 1.25–2.5 μm [50–100 μ"] Nickel

Wiping Area: Flash Gold

Solder Tail Area: 1–3 μm [40–118 μ"] Matte Tin

Electrical

Current Rating: 2 A

Insulation Resistance: $> 5 \times 10^8 \text{ Ohm at } 100 \text{ V}_{DC}$

Withstanding Voltage: 1000 V_{DC}

Environmental


Temperature Range: -25 °C to +105 °C

Processing Temperature: max. 260 °C (Profile per J-STD-020C)

Moisture Sensitivity Level: 1 (per J-STD-020C)

UL File No.: E68080

961 Series

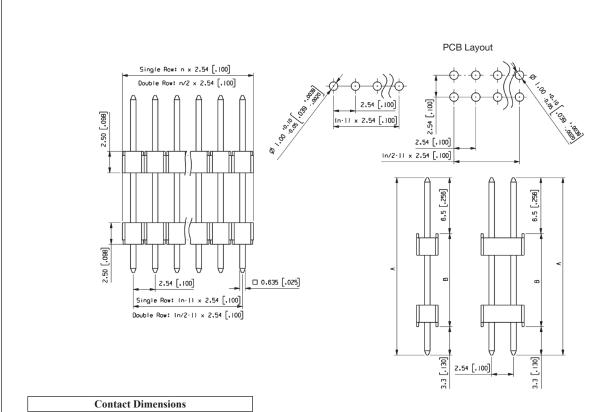


Contact Dimensions					
Coding No.	A	В			
03	18.5 [.73]	8.7 [.34]			
18	20.6 [.81]	10.8 [.42]			
12	22.4 [.88]	12.6 [.50]			
06	23.6 [.93]	13.8 [.54]			
07	25.7 [1.01]	15.9 [.62]			
08	27.5 [1.08]	17.7 [.69]			
13	29.8 [1.17]	20.0 [.79]			
14	31.6 [1.24]	21.8 [.86]			
15	38.4 [1.51]	28.6 [1.13]			
16	41.6 [1.64]	31.8 [1.25]			
17	46.1 [1.81]	36.3 [1.43]			



n = No. of Contacts

Tolerance Unless Noted [mm]					
Nominal Size	0.5-3	3–6	6–30	30–120	
Linear Dim	+/- 0.1	+/- 0.1	+/- 0.2	+/- 0.3	
Radii	+/- 0.2	+/- 0.5	+/- 1	+/- 1	

Ordering Information

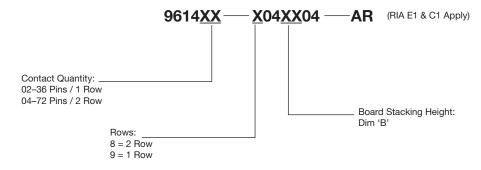

TS-2185-C Sheet 2 of 2

Important Notice
All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.
Warranty; Limited Remedy; Limited Liability.
This product will be free from defects in material and manufacture for a period of ninety (90) days from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

3M Electronics Solutions Division 6801 River Place Blvd. Please recycle. Printed in USA. © 3M 2012. All rights reserved. RIA-2217A-E

Austin, TX 78726-9000

www.3Mconnectors.com

U.S.A. 1-800-225-5373

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 000-34000 0009482033 0009507031 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 636-1427 638009-1 641938-9 641991-4 644168-1 647662-1 65039-019ELF 65817-002LF 65817-015LF 65863-015LF 66207-023LF 67016-026LF 67046-001LF 67095-007LF 67230-005LF