


Dimensions: mm (in.)

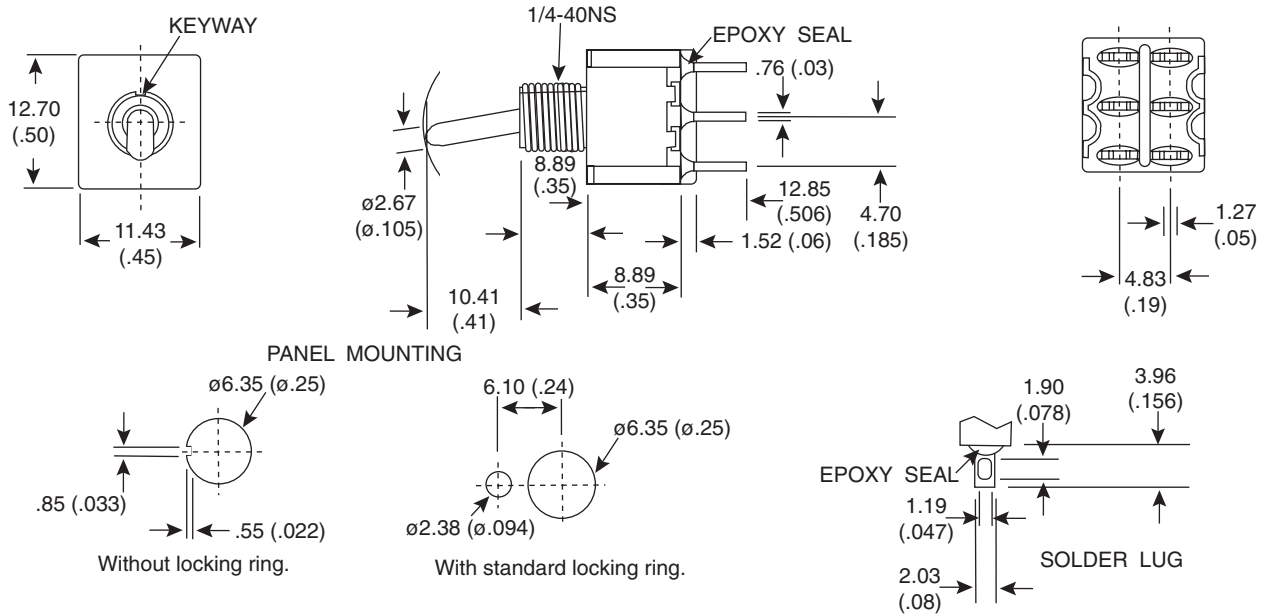

SWITCH FUNCTION

POS.1	POS.2
ON	(ON)
2-3,5-6	2-1,5-4

**Electrical Specifications:**

- Electrical Life: 40,000 make-and-break cycles at full load
- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@ sea level.
- Rating: 2A / 250 VAC  
5A / 120 VAC or 28 VDC

**Mechanical Specifications:**

- Operating Temperature: -30° C to +85° C.

**Materials:**

- Case: Diallyl phthalate (DAP)
- Acuator: Brass, chrome plated.
- Bushing: Brass, nickel plated.
- Housing: Stainless steel.
- Terminal/Contact: Silver or Gold plated.
- Switch Support: Brass, Tin plated.

**Note:**

- RoHS compliant by exemption

Toggle Switch  
108-1MD2T1B1M1QE-EVX

**Mountain  
Switch**

# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Toggle Switches](#) category:*

[M2024S3A1W06](#) [16006L](#) [29ET16-3B-B](#) [1TW1-8](#) [34DWMSP12B4M6RT](#) [10TC275](#) [T7-211B5](#) [AWTP1504](#) [U23P3Y9ZQE](#) [U21T1ZQE](#)