

## **Binding Posts**

164-R109B-EX, 164-R109R-EX





MOUNT HOLE

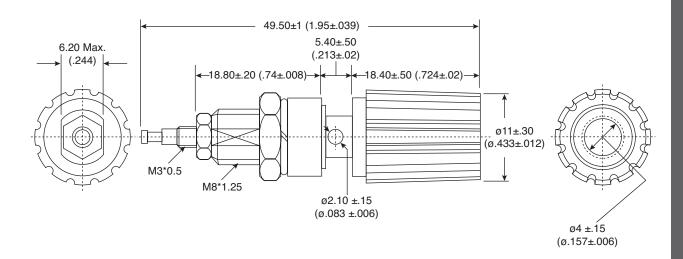

Dimensions: mm (in.)

SPECIFICATIONS	
Rating:	10A / 125VAC
Contact Resistance:	50mΩ Max.
Insulator Resistance:	500V DC 100MΩ Min.
Dielectric Strength:	1500V AC 1 minute
Temperature Range:	-10°C ~ +80°C
RoHS Compliant by Exemption	

MATERIAL	
Insulation:	Nylon
Metal:	Nickel plated brass
Panel Thickness:	.5-6.5mm

Date Last Revised: 6/13/12

Available from Mouser Electronics 1-800-346-6873 / www.mouser.com

KC-301098

## **X-ON Electronics**

Authorized Distributor

Click to view similar products for Test Plugs & Test Jacks category:

<u>R941342000</u> <u>125041/W</u> <u>BU-6162-M-60-2</u> <u>2798</u> <u>4092</u> <u>1050762-1</u> <u>111-0106-001</u> <u>23.3160-</u> 21,+ -22,+ -23,+ -24,+ -25 F70321S078L180 7015