ALL NEW PRODUCTS!

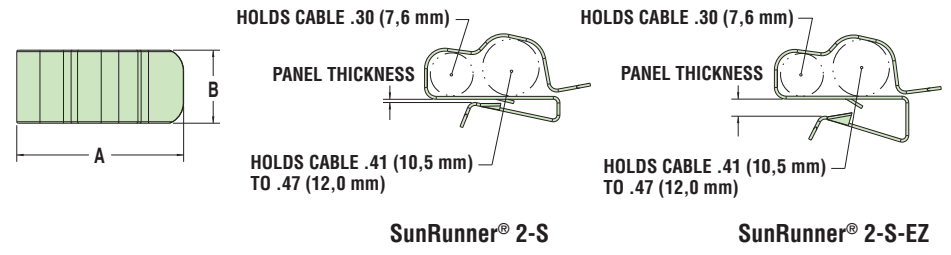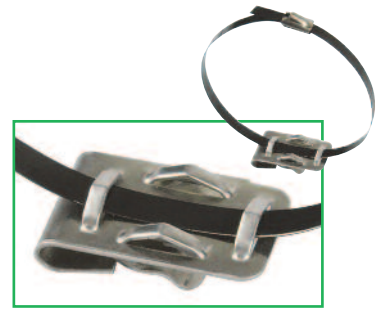## HEYClip™ Stainless Steel SunRunner® 2-S Series Cable Clips

For Rail-less Systems

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT A x B		REAR TAB LENGTH	
Minimum		Maximum									
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.
SunRunner 2-S											
.05	1,3	.12	3,0	.30 -. 47	7,6-12,0	S6448	SunRunner 2-S 100 Pack	1.14 x .50	29,0 x 12,7	.68	17,3
						S6488	SunRunner 2-S Bulk				
SunRunner 2-S-EZ											
.12	3,0	.25	6,4	.30 - .47	7,6-12,0	S6449	SunRunner 2-S-EZ 100 Pack	1.14 x .50	29,0 x 12,7	.68	17,3
						S6489	SunRunner 2-S-EZ Bulk				

HOLDS CABLE .30 (7,6 mm)
PANEL THICKNESS
HOLDS CABLE .41 (10,5 mm) TO .47 (12,0 mm)

SunRunner® 2-S

HOLDS CABLE .30 (7,6 mm)
PANEL THICKNESS
HOLDS CABLE .41 (10,5 mm) TO .47 (12,0 mm)
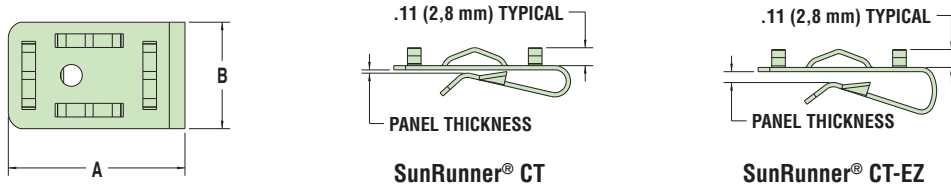
SunRunner® 2-S-EZ

- Designed to hold Micro-Inverter Cables .413˝ (10,5 mm) to .472˝ (12,0 mm) and Module Cables up to .300˝ (7,6 mm) in diameter for rail-less mounting systems.
- Constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- Smooth clip edges prevent damage to cable installation.
- Designed for panel and cable retention up to 15 lbs.
- Neatly dress cables on PV panels or module frames from .050˝ (1,3 mm) to .250˝ (6,4 mm) thick.
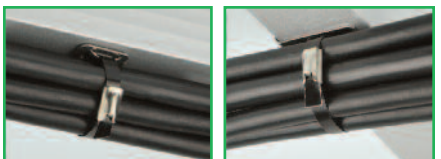

HEYClip™ SunRunner® CT Cable Tie Mounting Platforms

Stainless Steel Edge Clip

MAX CABLE TIE WIDTH		PANEL THICKNESS CLAMPING RANGE				INSERT POINTS	PART NO.	DESCRIPTION	FOOTPRINT A x B		REAR TAB LENGTH	
		Minimum		Maximum								
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.
SunRunner CT												
.31	8,0	.06	1,5	.12	3,0	4	S6434	SunRunner CT 100 Pack	1.05 x .63	26,7 x 16,0	.77	19,5
							S6474	SunRunner CT Bulk				
SunRunner CT-EZ												
.31	8,0	.12	3,0	.25	6,4	4	S6435	SunRunner CT-EZ 100 Pack	1.06 x .63	26,9 x 16,0	.77	19,5
							S6475	SunRunner CT-EZ Bulk				

.11 (2,8 mm) TYPICAL
PANEL THICKNESS

SunRunner® CT

.11 (2,8 mm) TYPICAL
PANEL THICKNESS

SunRunner® CT-EZ

Material	.020˝ thick heat treated 410 stainless steel (2-S & 2-S-EZ) .025˝ Thick 304 stainless steel (CT & CT-EZ)
Certifications	c(UL)us Certified by UL for Compliance with both Canadian and US Requirements under File E54523

- Designed to easily mount to module or frame extrusions without the need for mounting holes or adhesives.
- Designed to be used with Heyco Stainless Steel Cable Ties up to .31˝ (8,0 mm) width or Heyco SunBundler Stainless Steel Wire Cable Ties.
- Hold cable bundles parallel or perpendicular to the mounting frame.
- Generous lead-in for installation without tools.
- Constructed from corrosion resistant 304 stainless steel.
- SunRunner CT-EZ designed for thicker module frames as well as racking systems - accommodates profiles up to .250˝ (6,4 mm) thick.
- UL Listed per UL 1565.

Mount Parallel or Perpendicular

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cable Ties *category:*

Click to view products by Heyco *manufacturer:*

Other Similar products are found below :

20093-0 SJ-3463 SJ3518FR-1x50 SJ3526N-Beige-2"x50yd SJ3526N BLACK 58" X 50YD SJ3571 SJ-3571-1"x50yd-Black 20113-0 T56137 3-350087-0 CTB75X75BKA-C 3722 561-B110120 561-EZAB580T 561-EZS375B40 561-N3510 561-TA250125 08350-0 08443-0 08600-0 10035-0 10036-0 10037-0 10325-0 10362-0 10606-0 561-EZ250 561-EZ500 561-EZ625 561-EZ750 561-TA00600 SJ3519FR BLACK 1X50 SJ3527N-Beige-2"x50yd SJ3527N-LOOP-BLACK-1 SJ3572-2"x50yd-Black 157-00039 3719 SJ-3401 BLACK 1" 08445-0 08582-0 08386-0 10431-0 08359-0 10056-0 10620-0 10345-0 10344-0 08416-0 08384-0 08401-0