

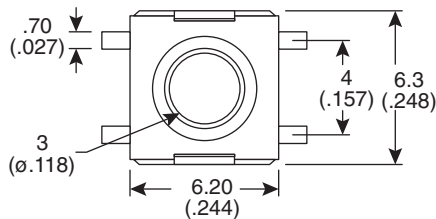

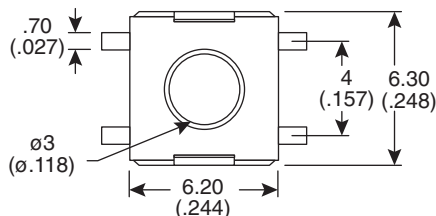




Dimensions: mm (in.)




101-0266-EV

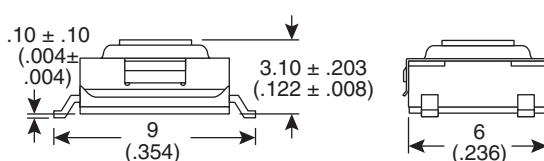

101-0366-EV

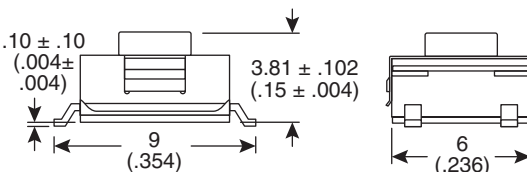

PCB Layout



Circuit Diagram

**Mechanical Specifications:**

- Stop strength: 3Kg for 15 seconds
- Operating force: 160±50g (101-0266-EV), 180±50g (101-0366-EV)
- Operating temperature: -25°~+70°C
- Storage temperature: -30°~+80°C
- Travel: .25 +.02 -.1mm

**Electrical Specifications:**

- Life: 100,000 cycles (101-0266), 500,000 cycles(101-0366)
- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric Strength: 250VAC for 1 minute
- Rating: 50mA / 12VDC

**Note:**

- RoHS Compliant and process compatible with 260° solder

**Materials:**

- Cover: stainless steel
- Contacts: silver clad phosphor bronze
- Terminals: silver clad brass
- Base: PPA, black

**Tactile Switches**  
101-0266-EV, 101-0366-EV



# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Tactile Switches](#) category:*

[B3F-1060](#) [TLE1105BF250Q](#) [101-TS4322T3201-EV](#) [5GTH9658222](#) [SKQYPCE010](#)  
[320.01E11WHT](#) [5ETH965](#) [SF320SH5X5H](#) [M22-KC01SMC10](#) [TL6215VF200GGT](#)