



# Multilayer Low Pass Filter

For 470-770MHz

# DEA160710LT-5023B1

---

**1.6x0.8mm [EIA 0603]\***

\* Dimensions Code JIS[EIA]

---

# Multilayer Low Pass Filter


Conformity to RoHS Directive

For 470-770MHz


## DEA160710LT-5023B1

### SHAPES AND DIMENSIONS

[Top view]

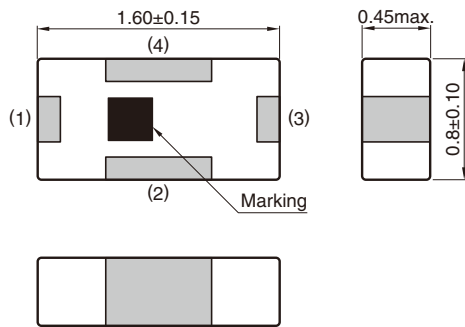

[Bottom view]

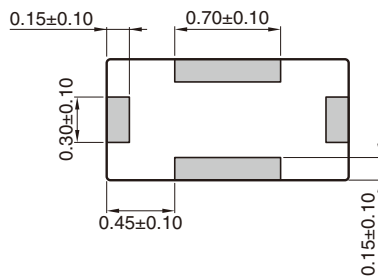


Terminal functions

|   |     |
|---|-----|
| 1 | IN  |
| 2 | GND |
| 3 | OUT |
| 4 | GND |

Dimensions in mm

### RECOMMENDED LAND PATTERN

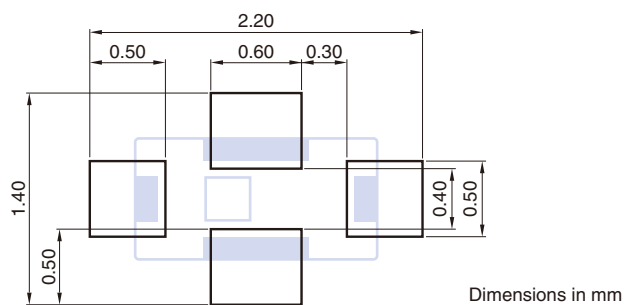

Dimensions in mm

RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. <http://product.tdk.com/en/environment/rohs/>

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

## DEA160710LT-5023B1

### ELECTRICAL CHARACTERISTICS

| Item                                  | Frequency Range (MHz) | Min.  | Typ.         | Max. |
|---------------------------------------|-----------------------|-------|--------------|------|
| Insertion Loss (dB)                   | 470 to 600            | —     | 0.76         | 1.0  |
|                                       | 600 to 710            | —     | 1.49         | 2.0  |
|                                       | 710 to 770            | —     | 3.09         | 4.0  |
| Return Loss (dB)                      | 470 to 710            | 11.73 | 13.6         | —    |
|                                       | 710 to 770            | 7.36  | 11.0         | —    |
| Attenuation (dB)                      | 880 to 915            | 25    | 33.4         | —    |
|                                       | 940 to 960            | 25    | 29.9         | —    |
|                                       | 1429 to 1453          | 27    | 33.6         | —    |
|                                       | 1920 to 1980          | 26    | 30.7         | —    |
|                                       | 2400 to 2500          | 26    | 33.0         | —    |
| Characteristic Impedance ( $\Omega$ ) |                       |       | 50 (Nominal) |      |

· Ta: +25±5°C

### TEMPERATURE RANGE


| Operating temperature<br>(°C) | Storage temperature<br>(°C) |
|-------------------------------|-----------------------------|
| -40 to +85                    | -40 to +85                  |

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.


# DEA160710LT-5023B1

## FREQUENCY CHARACTERISTICS


### INSERTION LOSS

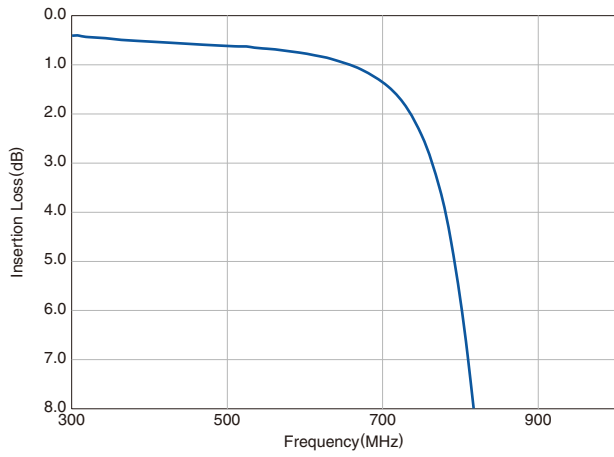

### ATTENUATION

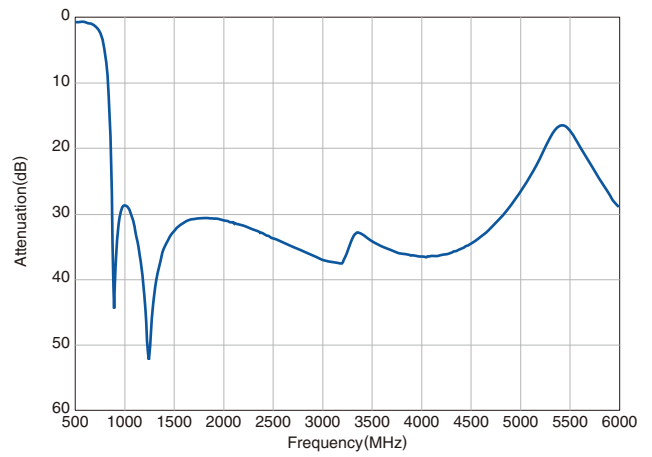


### RETURN LOSS

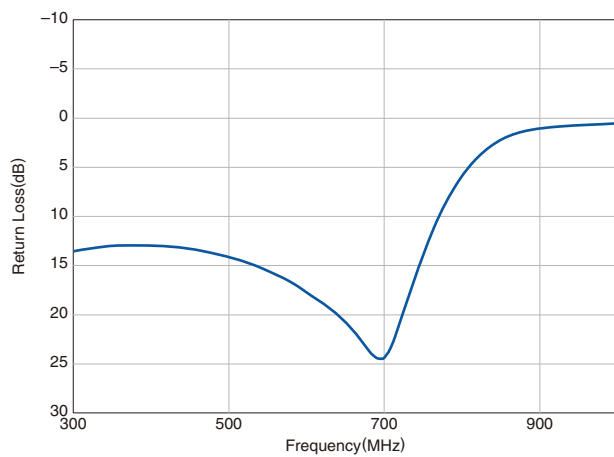

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

**RECOMMENDED REFLOW PROFILE**

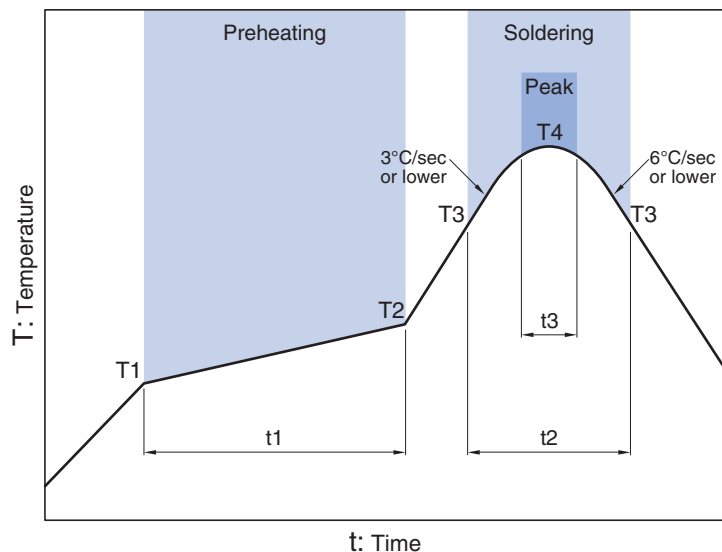

| Preheating |       |              | Soldering                |              |              |            |
|------------|-------|--------------|--------------------------|--------------|--------------|------------|
| Temp.      | Temp. | Time         | Critical zone (T3 to T4) |              | Temp.        | Time       |
| T1         | T2    | t1           | T3                       | t2           | T4           | t3*        |
| 150°C      | 200°C | 60 to 120sec | 217°C                    | 60 to 120sec | 240 to 260°C | 30sec max. |

\* t3 : Time within 5°C of actual peak temperature  
 The maximum number of reflow is 3.

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- |   |  |
|---|--|
| (1) Aerospace/Aviation equipment                                  | (8) Public information-processing equipment                                  |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment   |
| (3) Medical equipment   | (10) Electric heating apparatus, burning equipment                           |
| (4) Power-generation control equipment                            | (11) Disaster prevention/crime prevention equipment                          |
| (5) Atomic energy-related equipment                               | (12) Safety equipment  |
| (6) Seabed equipment  | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment                              |  |

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning category](#):*

*Click to view products by [TDK manufacturer](#):*

Other Similar products are found below :

[MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [DC4859J5005AHF](#) [AFS14A30-2185.00-T3](#) [DS-323-PIN](#)  
[DSS-313-PIN](#) [B39321R801H210](#) [B39921B4317P810](#) [1A0220-3](#) [2089-6207-00](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#)  
[LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [1P510S](#) [CER0813B](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [B69842N5807A150](#)  
[BD0810N50100AHF](#) [BD2425J50200AHF](#) [HMC189AMS8TR](#) [C5060J5003AHF](#) [JHS-114-PIN](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#)  
[DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#)  
[SF2081E](#) [SF2194E](#) [SF2238E](#) [CDBLB455KCAX39-B0](#) [RF1353C](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#)