


7.0×5.0mm

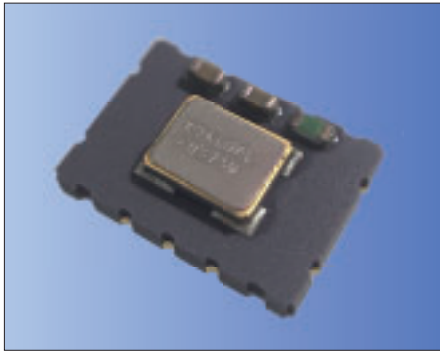

RoHS Compliant

Features

- High stability and high reliability
- 2.7 to 5.5V drive available
- Clipped sine wave or CMOS level output
- Low phase noise
- Disable Function (KT7050A)

Applications

- 5G, Smallcell, Stratum3
- SONET/ SDH/ Ethernet

How to Order

KT7050 □ 20000 □ A □ 33 T xx
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series
- ② Land Type
- ③ Output Frequency
- ④ Freq. Temp. Chrst.
- ⑤ Lower Operating Temp.
- ⑥ Upper Operating Temp.

	④	⑤	⑥
KAW	±0.28×10 ⁻⁶	-40°C	+85°C
KAY	±0.28×10 ⁻⁶	-40°C	+105°C
AAV	±0.10×10 ⁻⁶	-40°C	+105°C

⑦ Supply Voltage	⑧ Voltage Control Function
33	T
3.3V	TCXO
	Spec. Code*
	VCTCXO

*Please contact us for Spec. Code.

- ⑨ Individual Specification

Packaging (Tape & Reel 1000 pcs./ reel)



- Compliant to the GR1244-Core & GR253-Core
- Recommended in Microsemi's ZLAN-68 app. note for Stratum3 applications based on tests performed by Kyocera.

Specifications



Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	f _o	Standard Frequency: 10, 19.2, 20, 24.576, 26, 30.72, 38.88, 40 vs Temperature (-10 to +105°C) [±(f _{max} -f _{min})/ 2f _o]	10	40	MHz	
Frequency Tolerance	f _{tol}	vs Temperature (-40 to +85°C/ +105°C) [±(f _{max} -f _{min})/ 2f _o] vs Voltage	-0.1	+0.1	×10 ⁻⁶	
Supply Voltage	V _{CC}		-0.1	+0.1		
Current Consumption	I _{CC}	CMOS Output	+2.7	+5.5	V	
Frequency Aging	f _{age}	20years aging @40°C Including temp characteristics, initial tolerance, rated power supply voltage change and load change.	-	6	mA	
Voltage Control Range	f _{cont}	Positive *100k ohm min	-4.6	+4.6	×10 ⁻⁶	
Output Level	V _{pp}	Clipped Sine, Load: 10k ohm // 10pF	±5	±20	×10 ⁻⁶	
Low Level Output Voltage	V _{OL}	CMOS, Load: 15pF I _{OL} = 4mA	0.8	-	Vp-p	
High Level Output Voltage	V _{OH}	CMOS, Load: 15pF I _{OH} = -4mA	-	10% V _{CC}	V	
Rise / Fall Time (10%V_{CC} to 90%V_{CC})	tr/ tf	CMOS, Load: 15pF	90% V _{CC}	-	V	
Symmetry	SYM	50% V _{CC}	-	8	ns	
Phase Noise	-	@20MHz	@10Hz offset	-	-90	dBc/ Hz
			@100Hz offset	-	-120	
			@1kHz offset	-	-140	
			@10kHz offset	-	-150	
			@100kHz offset	-	-150	

* Please contact us for other specifications.

Dimensions

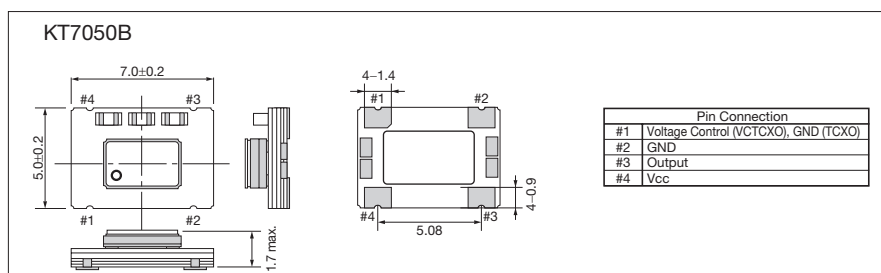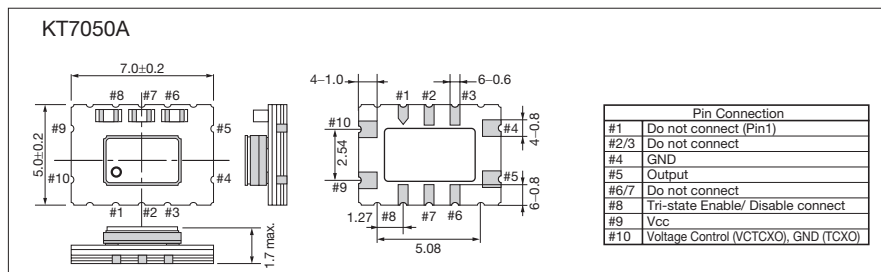

Recommended Land Pattern (Unit: mm)

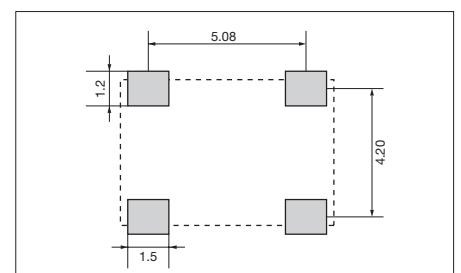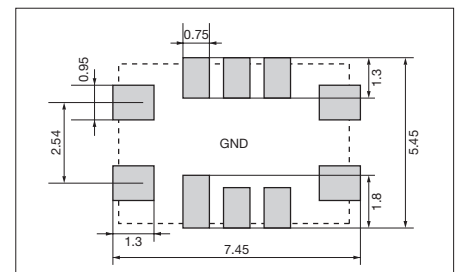

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [Kyocera](#) manufacturer:

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [SIT5002AI-8C-33N0-100.000000X](#) [AST3TQ-40.000MHZ-1](#) [SIT5021AI-2DD-33E-100.000000X](#)
[THD3031035LK280005-10.0M](#) [DS32KHZST&R](#) [JT3251P0040.000000](#) [SiT5000AC-3E-33E0-19.440000Y](#) [XTCLH26M000TJJA6P0](#)
[XTCLH25M000TJJA5P0](#) [XTCLH19M200TJJC3P0](#) [TG2016SMN 38.4000M-MCGNNM3](#) [TG2016SMN 48.0000M-MCGNNM3](#)
[TG2016SMN 19.2000M-ECGNNM3](#) [TX-8010-EAE-2870-12M800](#) [ECS-TXO-32CSMV-200-EN-TR](#) [CVT32-20.000](#) [ASTX-H11-](#)
[27.000MHZ-T](#) [VT-803-EAE-206A-52M0000000](#) [SIT5356AI-FQ-33E0-25.000000X](#) [DS32KHZSN#T&R](#) [ECS-TXO-2520-33-120-AN-TR](#)
[ECS-400-18-33-JGN-TR](#) [ECS-320-18-33-JEM-TR](#) [ECS-320-10-33-JTL-TR](#) [ECS-320-10-33-AGM-TR](#) [581L200X2ITT](#) [LFPTXO000009Bulk](#)
[AST3TQ-V-40.000MHz-28](#) [AST3TQ-V-40.000MHz-50-C](#) [AST3TQ-T-15.360MHz-28](#) [LFPTXO000316Bulk](#) [SiT1568AI-JE-DCC-32.768E](#)
[AST3TQ-T-20.000MHz-28](#) [AST3TQ-T-25.000MHz-28](#) [LFPTXO000068Bulk](#) [AST3TQ-V-30.720MHz-28](#) [LFPTXO000244Bulk](#)
[LFPTXO006980Bulk](#) [XTCLH50M000CHJA3P0](#) [LFPTXO000291Bulk](#) [AST3TQ-V-20.000MHz-28](#) [LFPTXO000268Bulk](#) [AST3TQ-T-](#)
[40.000MHz-28](#) [AST3TQ-T-16.384MHz-28](#) [ABDFTCXO-20.000MHz-L-2-CT](#) [LFTCXO073004Cutt](#) [KT2520K25000ZAW18TDS](#) [VT-803-](#)
[EAH-1060-48M0000000](#) [LFTCXO077226Cutt](#)