


PLW3030DA Series 3030

Mid Power LED

Product Datasheet

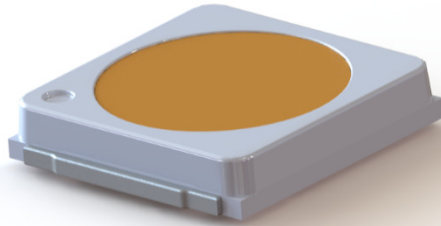

Description

Plessey PLW3030DA SMT LEDs are designed for linear tubes, spot lights, bulb replacements and other general lighting applications. The light is emitted close to a Lambertian distribution and hence this SMT package is naturally suitable for backlighting panels and symbols. The LEDs are packed in reels containing 3000 pieces; each individual reel will be shipped in single intensity and colour bin, to provide close uniformity.

Features

- 3030 footprint (3.2 x 3.0 x 0.6mm)
- Hot colour binning (85°C)
- High reliability PLCC packaging
- Diffused pale yellow resin
- 120 degree wide viewing angle

Applications

- Decoration Lighting
- Instrument panel backlighting
- Illumination symbols
- General lighting
- Signage lighting

Variant	Colour	CCT	
		Min.	Max.
PLW3030DA-2700	Warm White 2700K	2580K	2870K
PLW3030DA-3000	Warm White 3000K	2870K	3220K
PLW3030DA-3500	Warm White 3500K	3220K	3710K
PLW3030DA-4000	Neutral White 4000K	3710K	4260K
PLW3030DA-5000	Neutral White 5000K	4260K	5310K
PLW3030DA-5700	Cool White 5700K	5310K	6020K
PLW3030DA-6500	Cool White 6500K	6020K	7040K

Absolute Maximum Ratings

$T_{amb} = +25^{\circ}\text{C}$ unless otherwise stated

Parameter	Symbol	Minimum	Maximum	Unit
DC Forward Current	I_F	-	265	mA
Peak Pulse Forward Current ^[1]	I_{FP}	-	530	mA
Power Dissipation	P_d	-	1.8	W
Storage Temperature	T_{stg}	-40	+100	$^{\circ}\text{C}$
Junction Temperature	T_j	-40	+125	$^{\circ}\text{C}$

^[1] Pulse width $\leq 10\text{ms}$, duty cycle $\leq 10\%$

Electro-optical Characteristics

$T_{amb} = +25^{\circ}\text{C}$ unless otherwise stated

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 150\text{mA}$	5.8	6.25	6.8	V
Reverse Current	I_R	$V_R = 5\text{V}$	-	-	10	μA
Colour Rendering Index	CRI	$I_F = 150\text{mA}$	80			%
Thermal Resistance	R_{thi-sp}		-	14	-	K/W
Half-Intensity Angle	$2\Theta_{1/2}$	$I_F = 150\text{mA}$	-	120	-	deg

Recommended Operating Conditions

In typical applications, for optimum LED performance

Parameter	Symbol	Minimum	Maximum	Unit
Operating Ambient Temperature	T_{opr}	-40	+100	$^{\circ}\text{C}$

Ordering Information

Name	Order Code	Luminous Flux Range	Forward Voltage Range
PLW3030DA-2700	PLW3030DAW27001	2A, 3A	V1-V5
PLW3030DA-3000	PLW3030DAW30001		
PLW3030DA-3500	PLW3030DAW35001		
PLW3030DA-4000	PLW3030DAN40001	3A, 4A	
PLW3030DA-5000	PLW3030DAN50001		
PLW3030DA-5700	PLW3030DAC57001		
PLW3030DA-6500	PLW3030DAC65001		

Intensity Bin Groups

$I_F = 150\text{mA}$, $T_{\text{amb}} = +25^\circ\text{C}$, unless otherwise stated

Group	Luminous flux ^[1] (lm)	
	Min.	Max.
2A	110	120
3A	120	130
4A	130	140

^[1] Tolerance $\pm 7\%$

Forward Voltage Bin Groups

$I_F = 150\text{mA}$, $T_{\text{amb}} = +25^\circ\text{C}$, unless otherwise stated

Group	V_F ^[1] (V)	
	Min.	Max.
V1	5.8	6.0
V2	6.0	6.2
V3	6.2	6.4
V4	6.4	6.6
V5	6.6	6.8

^[1] Tolerance $\pm 0.1\text{V}$

Hot Chromaticity Binning

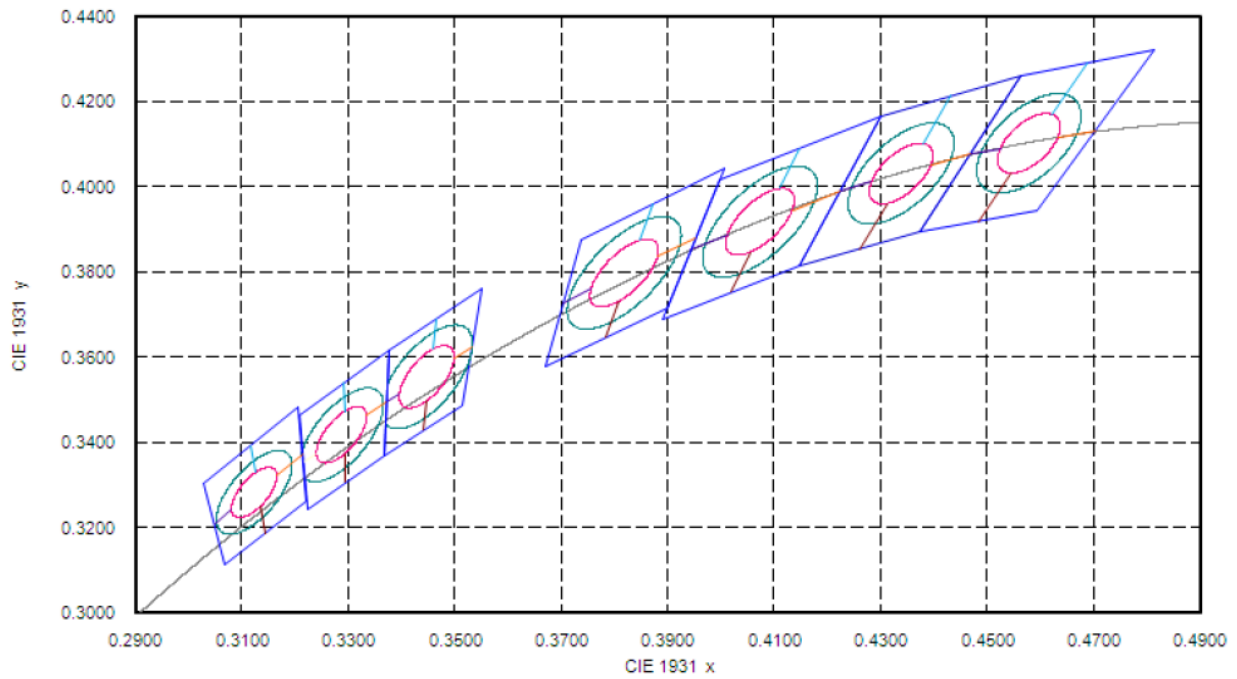


Figure 1. Colour Chromaticity Binning at 85°C

Relative Spectral Emission

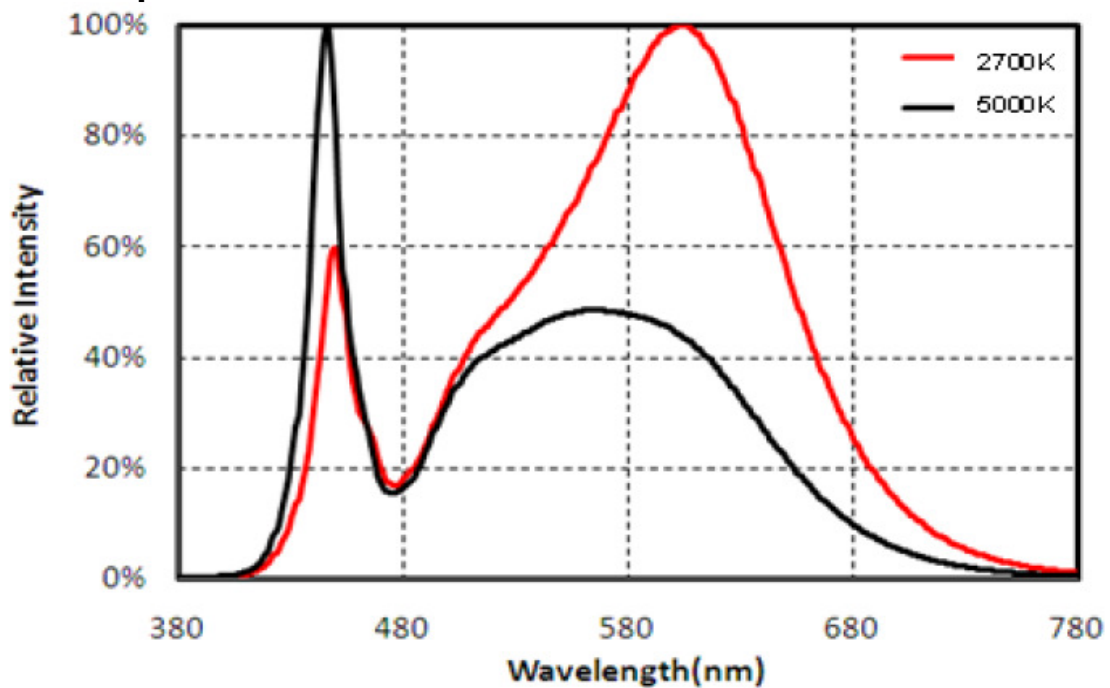


Figure 2. Normalised spectral power distribution (2700K & 5000K)

Note: The relative spectral emission corresponds to a random LED sample

Angular Light Distribution

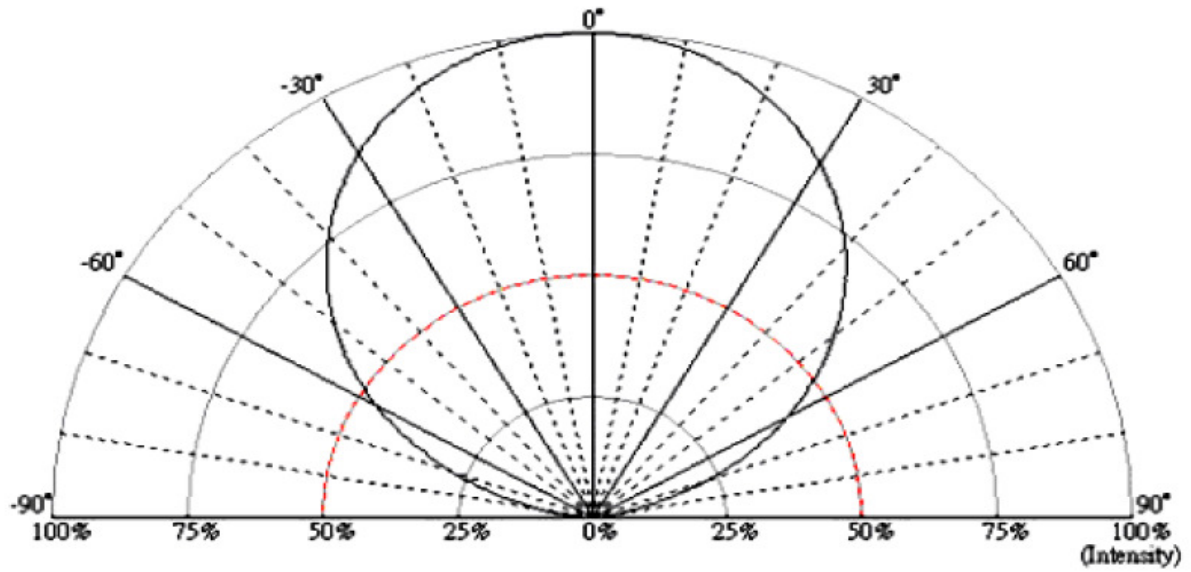


Figure 3. Angular distribution pattern of emitted light

Colour Chromaticity – Warm White 2700K

F 2700K

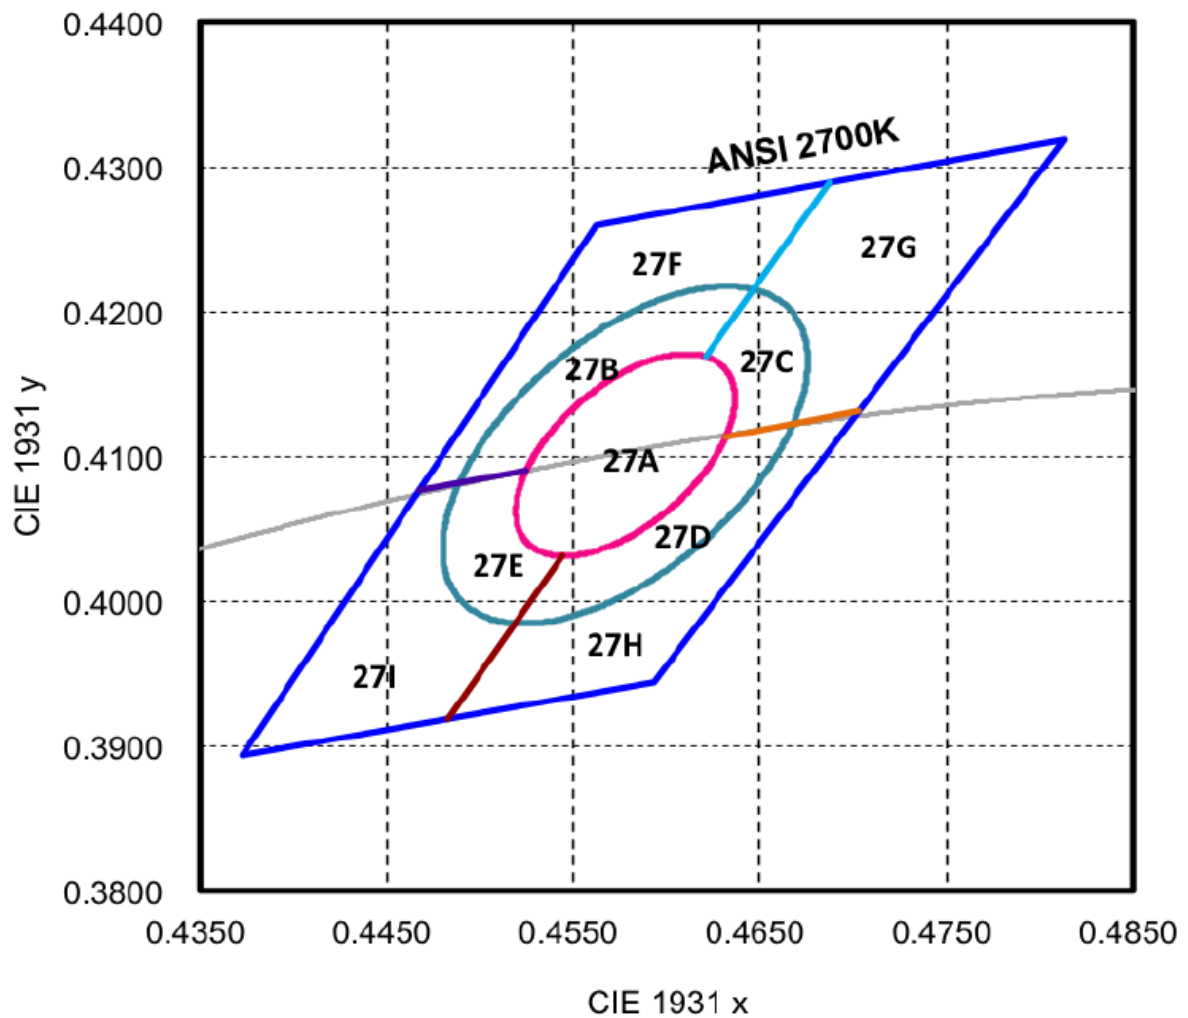


Figure 4A. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
2700K	3SDCM	0.4578	0.4101	0.00810	0.00420	53.7°
	5SDCM			0.01350	0.00700	

Colour Chromaticity – Warm White 3000K

3000K

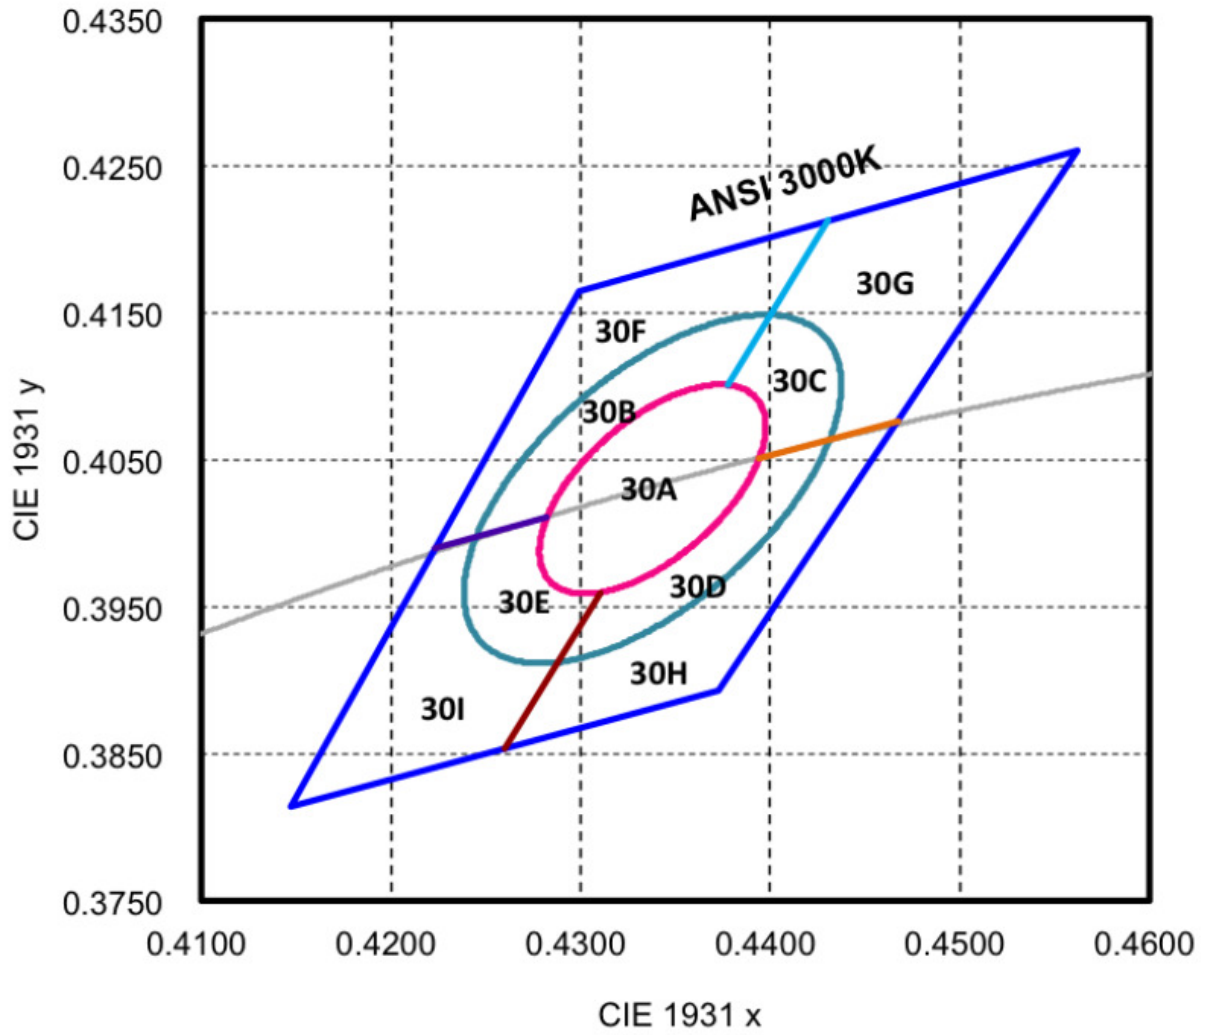


Figure 4B. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
3000K	3SDCM	0.4338	0.4030	0.00834	0.00408	53.22°
	5SDCM			0.01390	0.00680	

Colour Chromaticity – Warm White 3500K

3500K

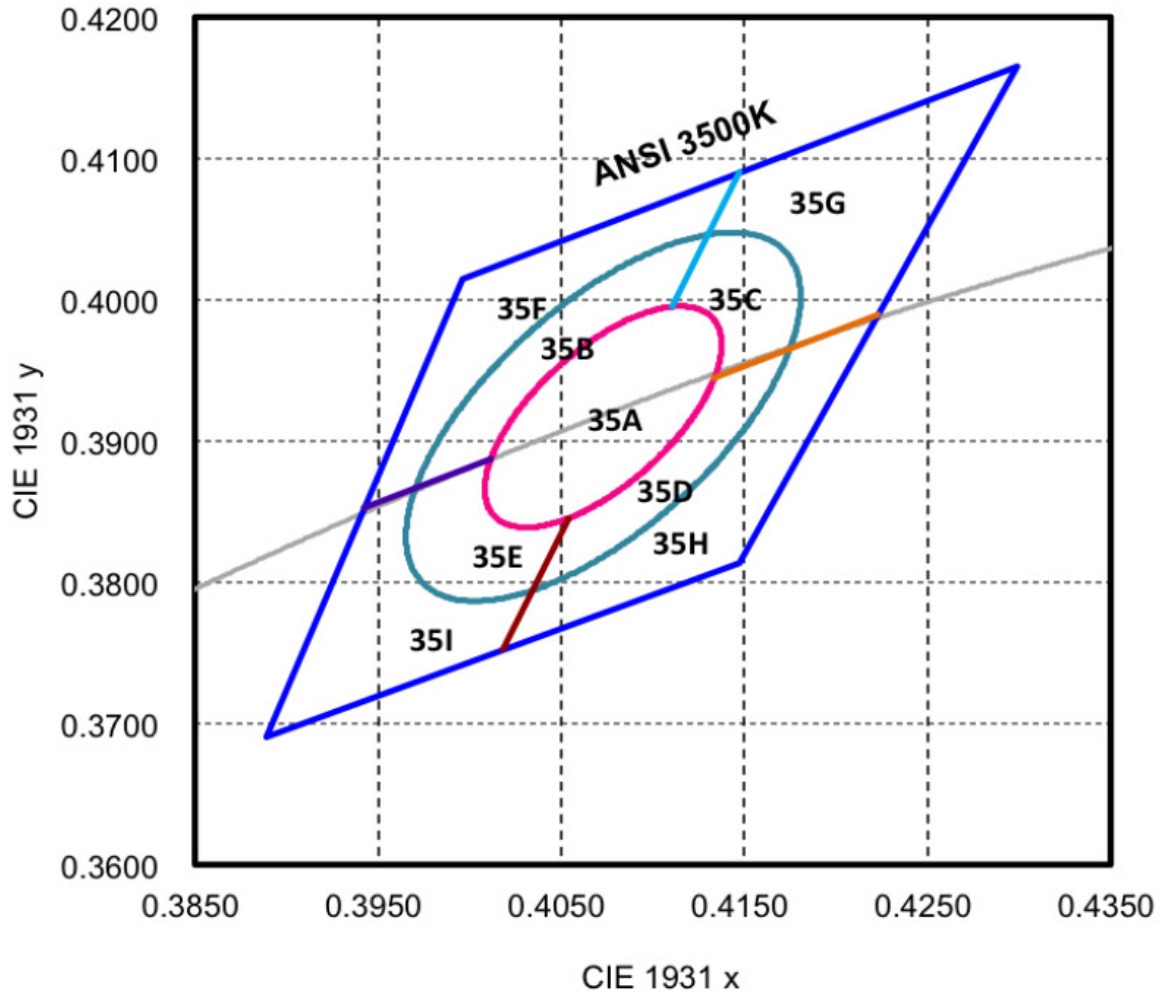


Figure 4C. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
3500K	3SDCM	0.4073	0.3917	0.00927	0.00414	53.22°
	5SDCM			0.01545	0.00690	

Colour Chromaticity – Neutral White 4000K

4000K

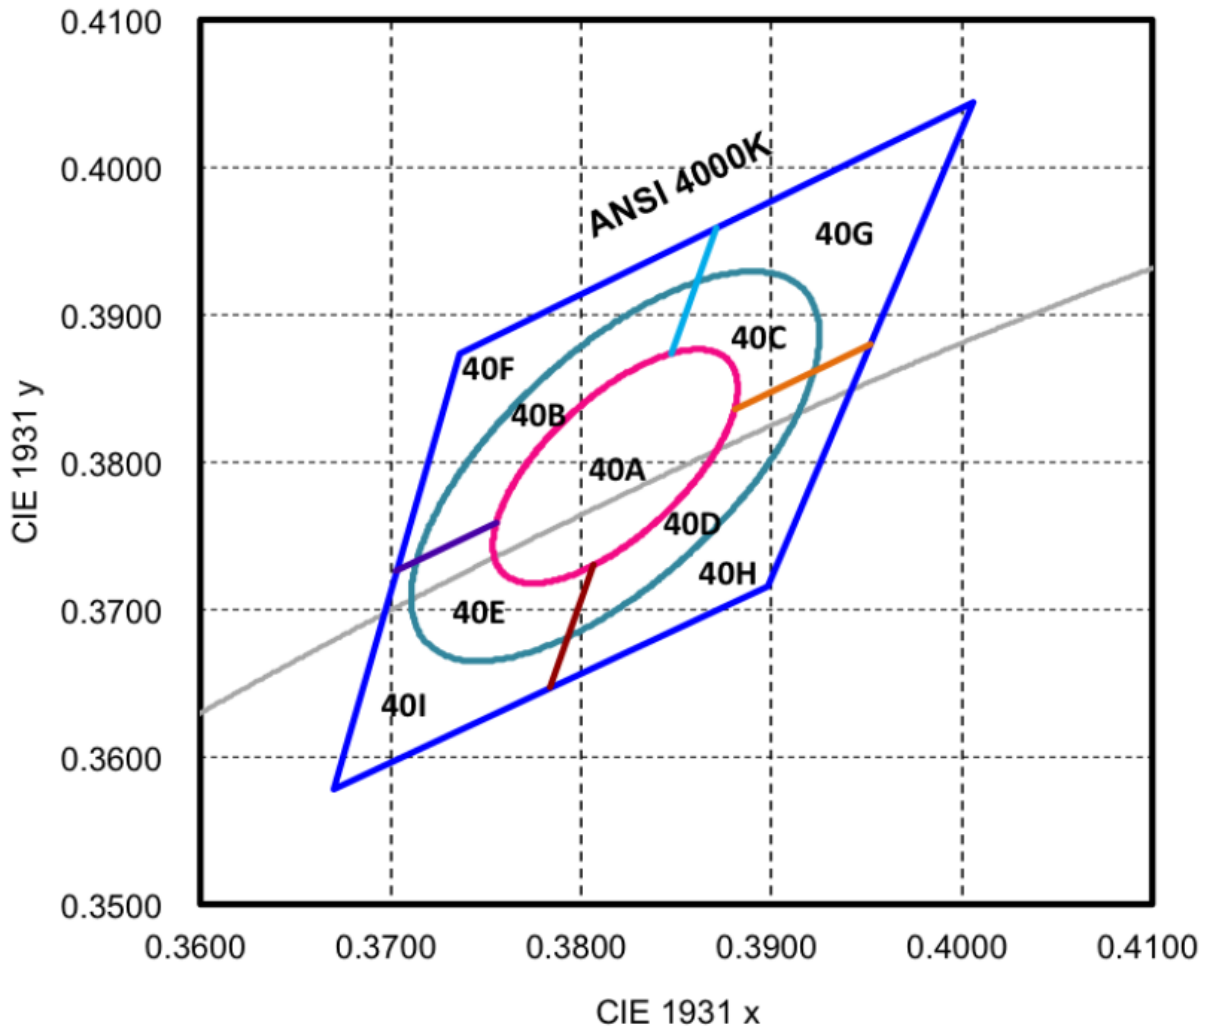


Figure 4D. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
4000K	3SDCM	0.3818	0.3797	0.00939	0.00402	53.72°
	5SDCM			0.01565	0.00670	

Colour Chromaticity – Neutral White 5000K

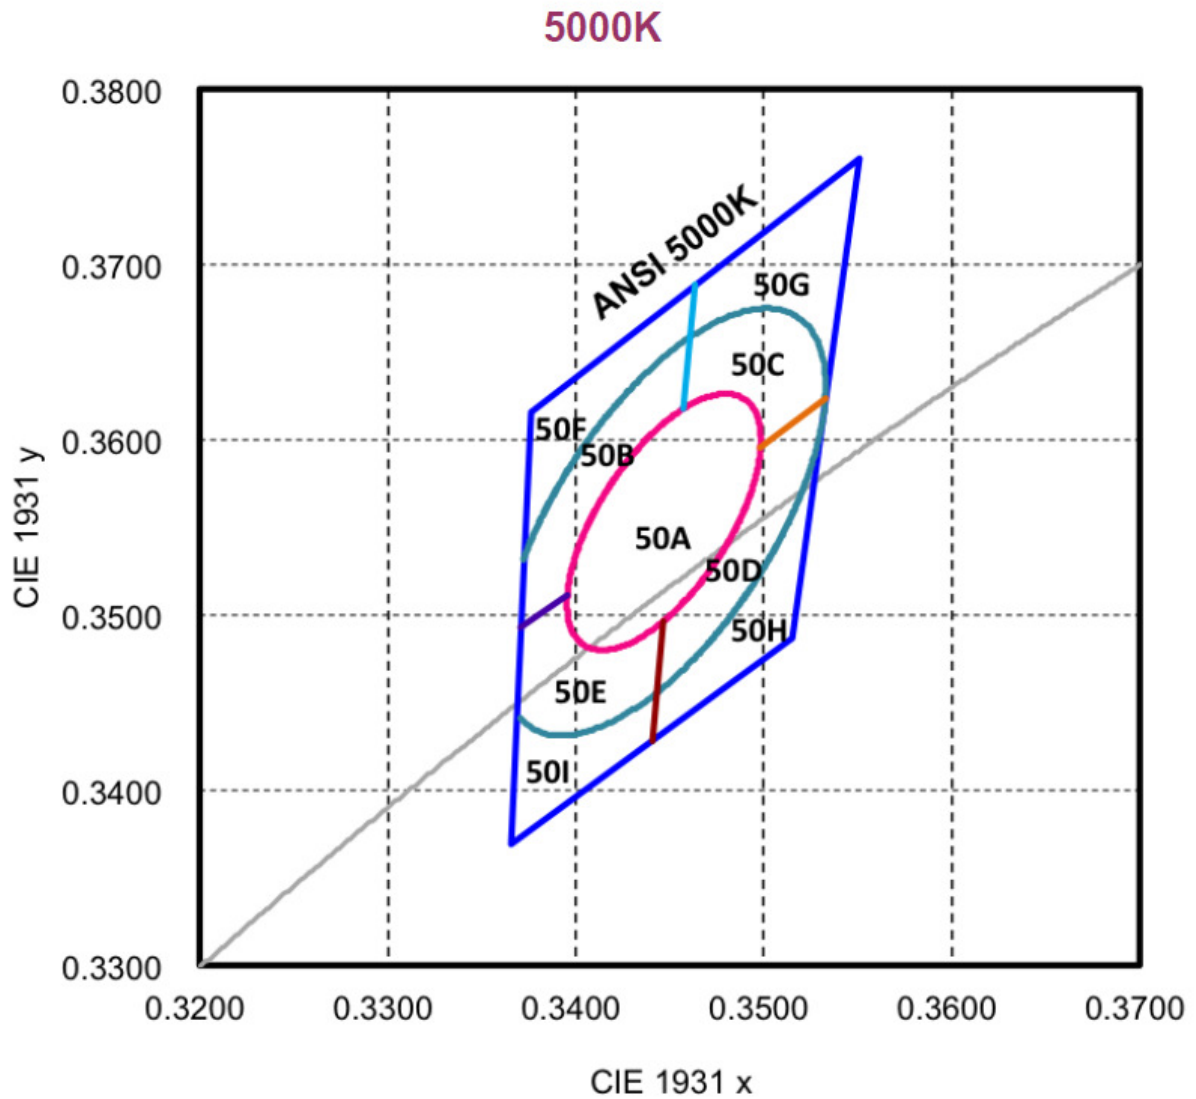


Figure 4E. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
5000K	3SDCM	0.3447	0.3553	0.00822	0.00354	59.62°
	5SDCM			0.01370	0.00590	

Colour Chromaticity – Cool White 5700K

5700K

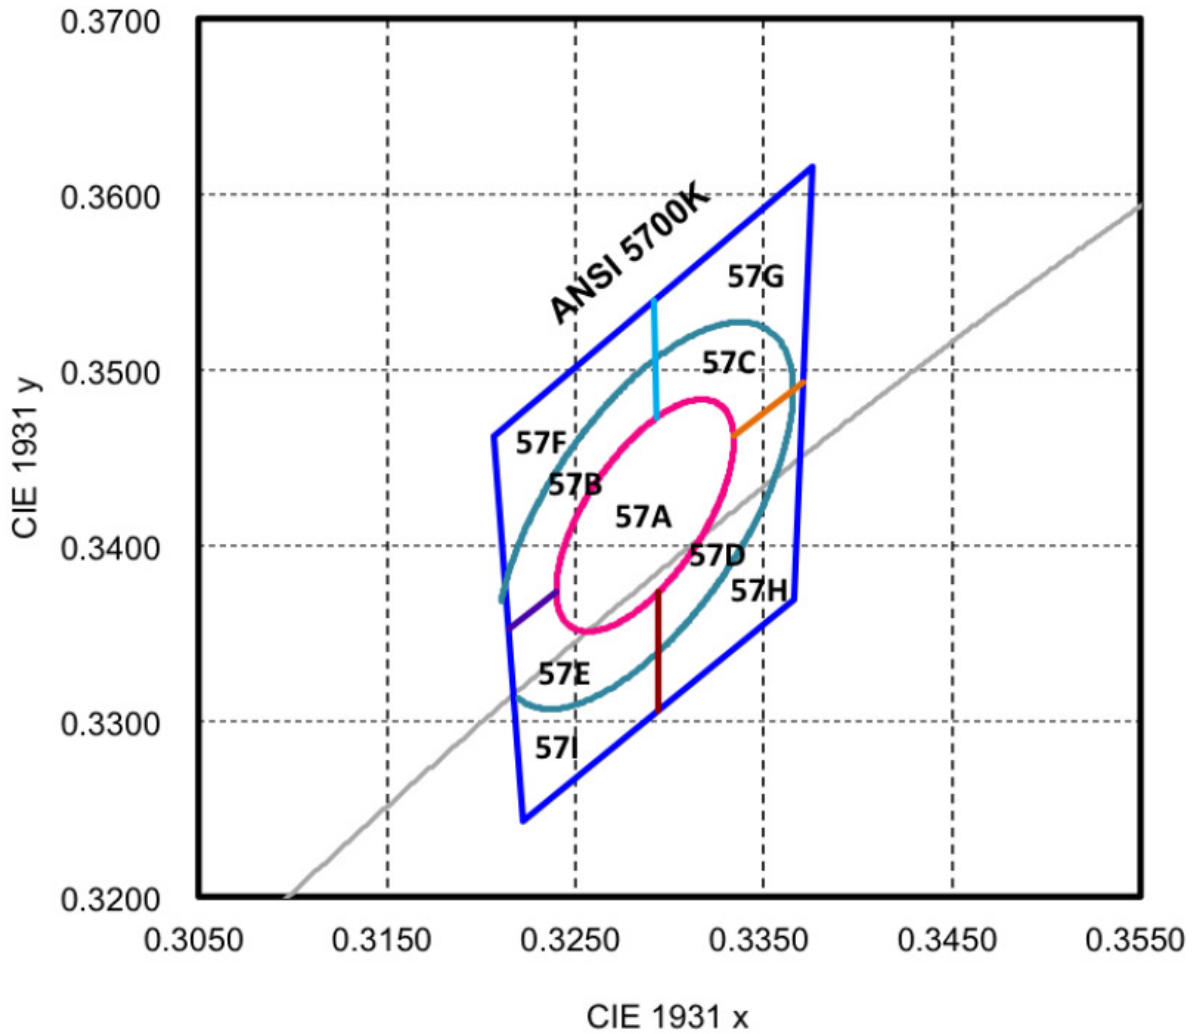


Figure 4F. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
5700K	3SDCM	0.3287	0.3417	0.00746	0.00320	59.09°
	5SDCM			0.01243	0.00533	

Colour Chromaticity – Cool White 6500K

6500K

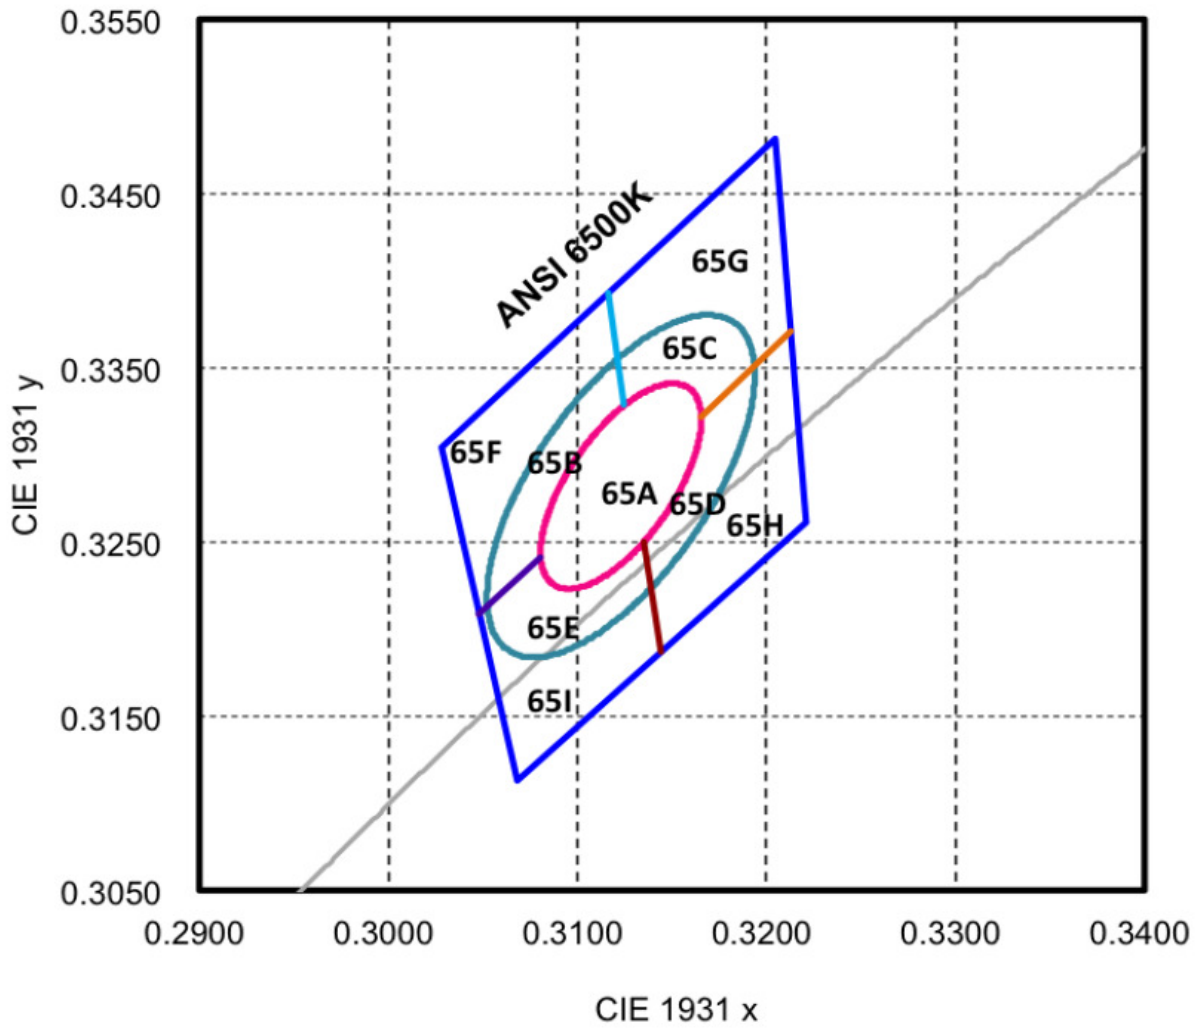


Figure 4G. CIE1931 chromaticity diagram (ANSI standard C78.377-2008)

nom. ANSI CCT	colour space	centre point		ellipse axis		Ellipse rotation angle
		x	y	a	b	
6500K	3SDCM	0.3123	0.3282	0.00669	0.00285	58.57°
	5SDCM			0.01115	0.00475	

Forward Current Characteristics

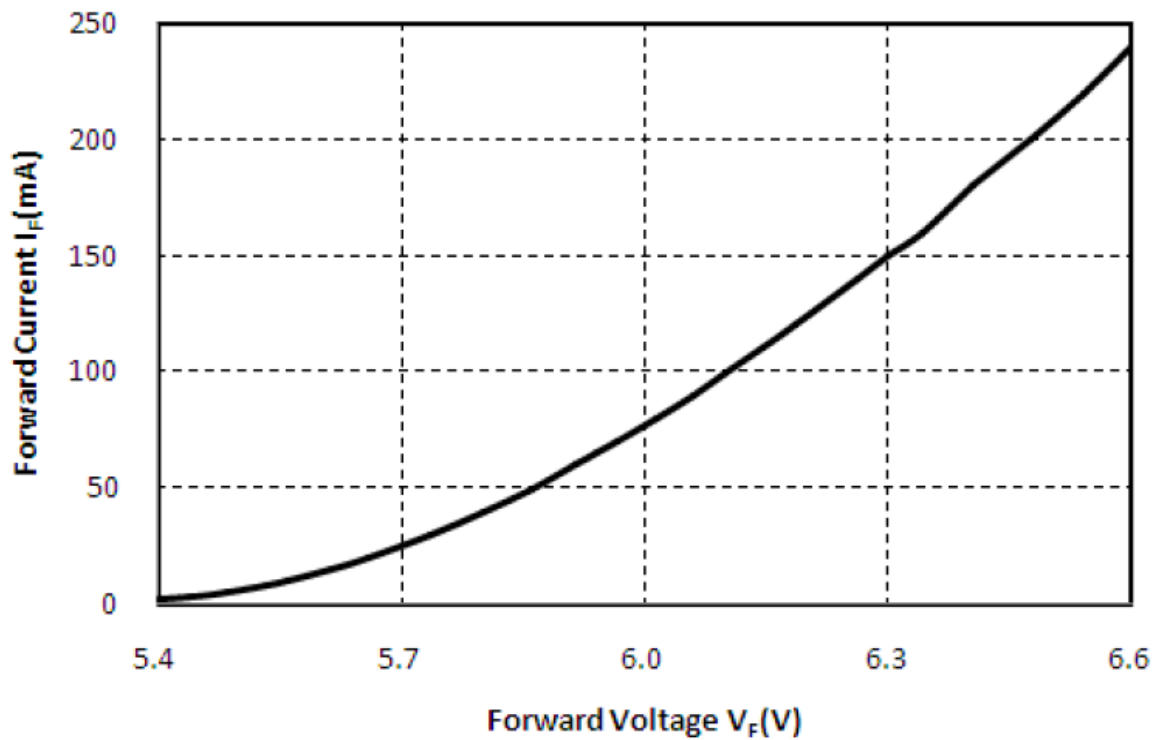


Figure 5. Typical forward current versus forward voltage ($T_a=+25C$)

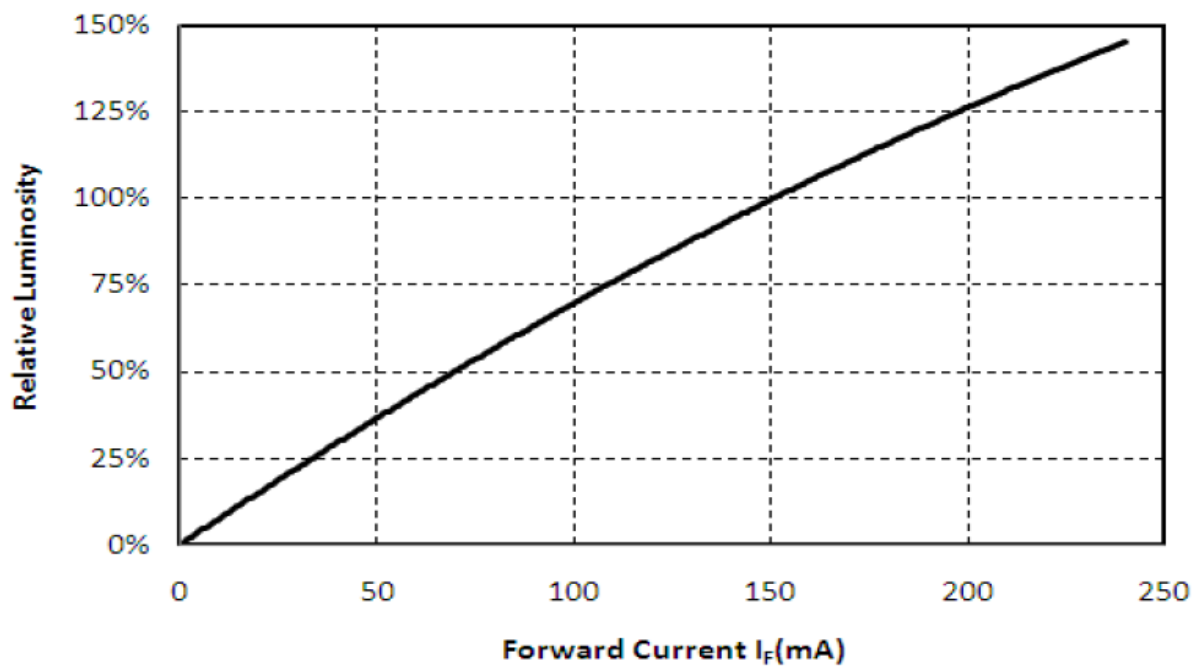


Figure 6. Relative luminous flux versus forward current ($T_a=+25C$)

Relative Forward Voltage versus Ambient Temperature

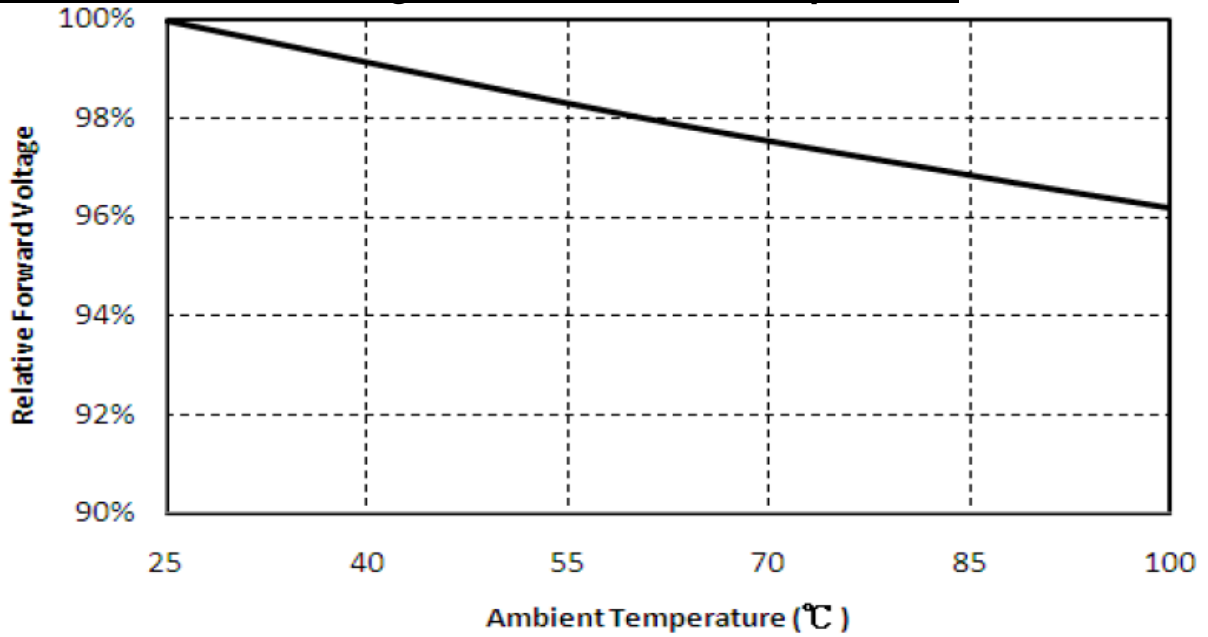


Figure 7. Typical forward voltage versus ambient temperature ($I_F=150\text{mA}$)

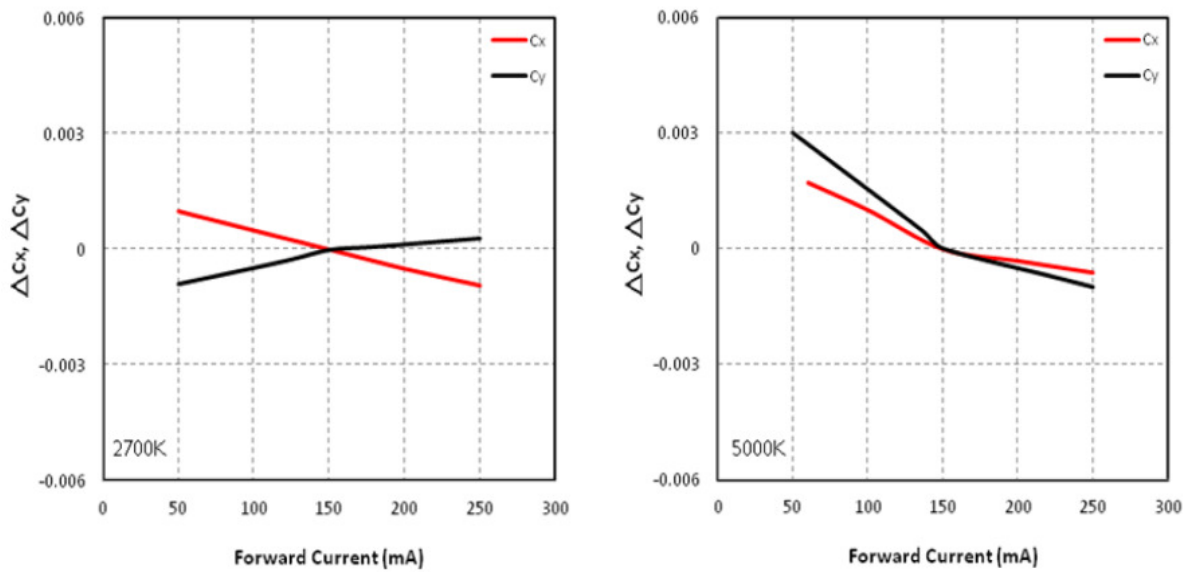


Figure 8. Forward Current versus Chromaticity (2700K & 5000K)

Relative Luminous Intensity versus Ambient Temperature

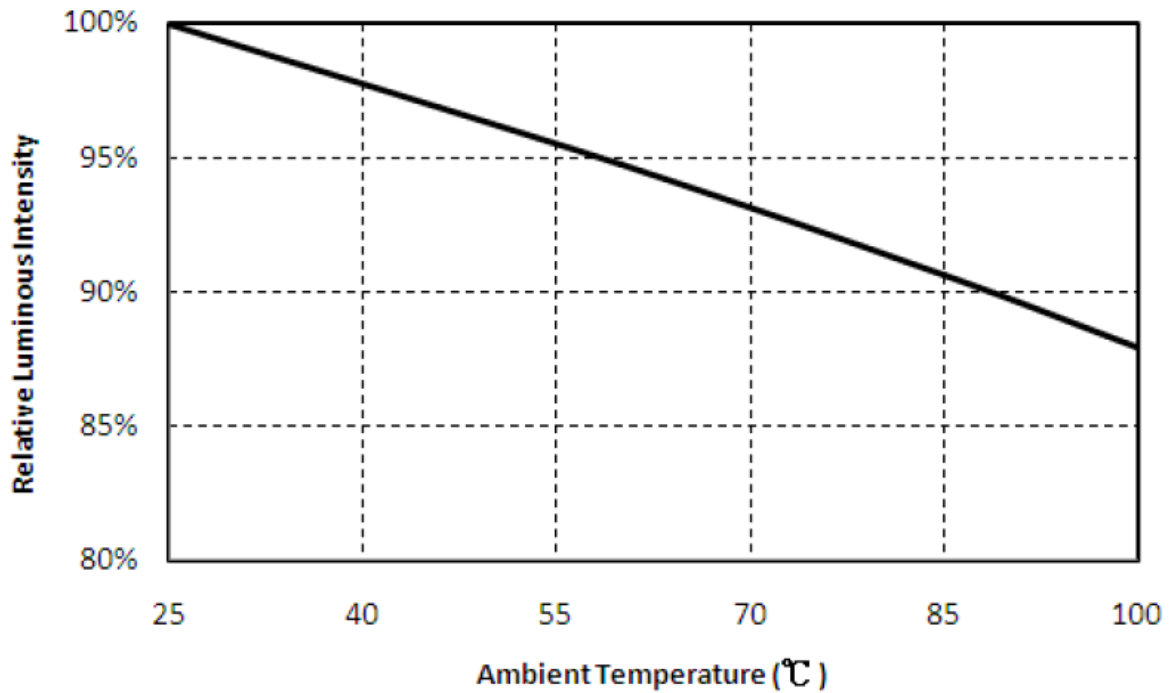


Figure 9. Typical luminous intensity versus ambient temperature ($I_f=150mA$)

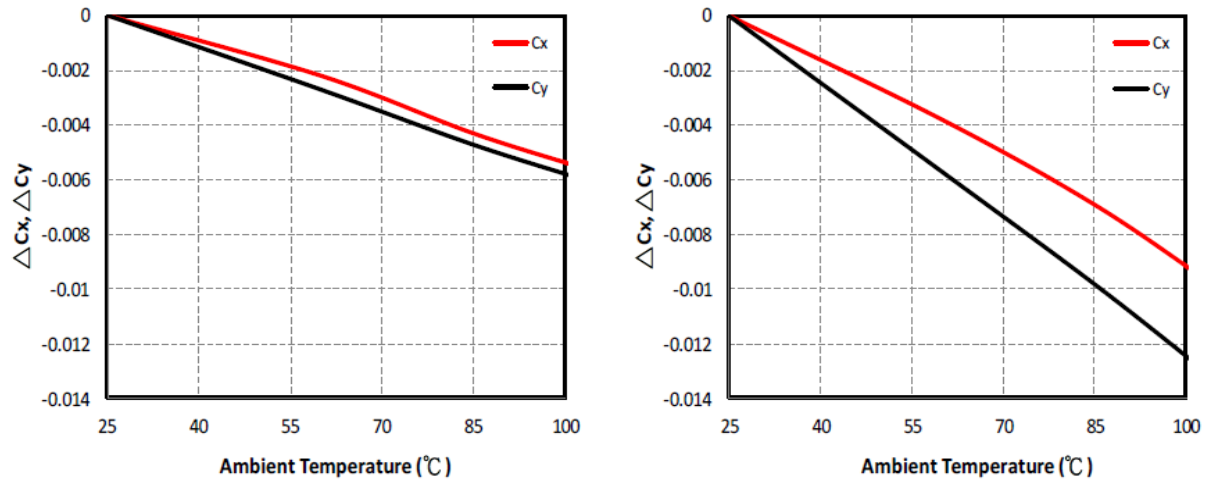


Figure 10. Chromaticity coordinates versus ambient temperature Package Outline Dimensions

Reflow Soldering Profile

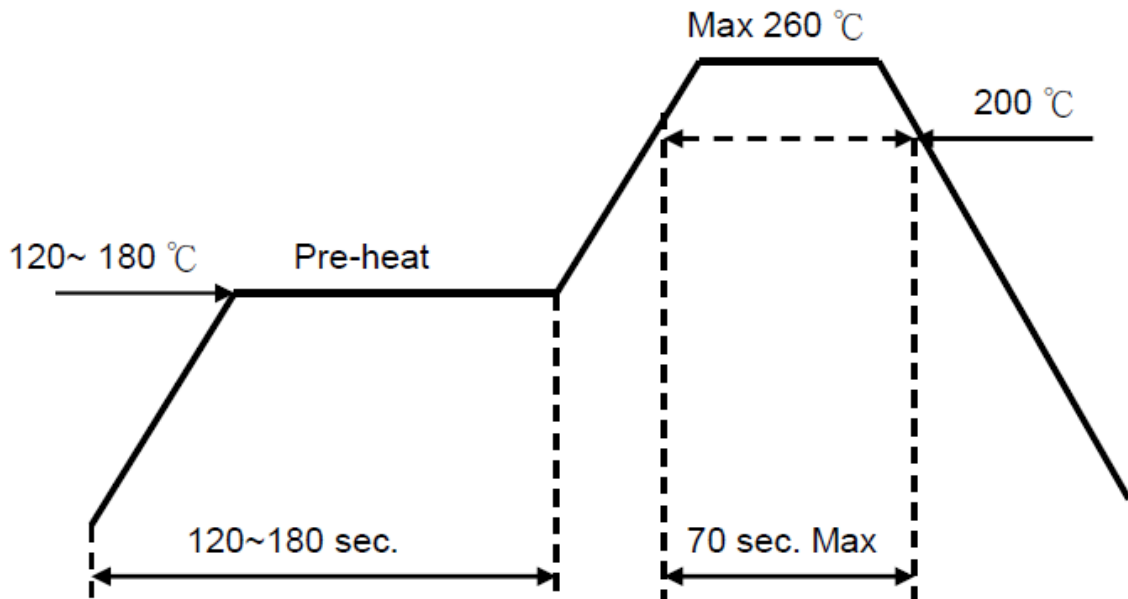


Figure 12. Reflow soldering profile

1. Reflow soldering should not be done more than twice
2. When soldering, do not put stress on the LEDs during heating


Soldering iron

1. When hand soldering, the temperature of the iron must be $\leq +350^{\circ}\text{C}$ for 3 seconds
2. Hand soldering should be performed only once.

Handling Instructions

Plessey LEDs are not designed to operate with reverse bias.

Precautions are required to prevent reverse bias in applications and during handling.

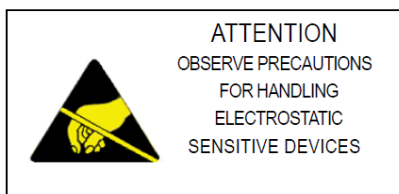

Moisture Sensitivity

JEDEC Level	Floor life		Bake	
	Time	Conditions	Time	Conditions
3	168 hours	$\leq +30^{\circ}\text{C} / 60\% \text{ RH}$	≥ 82 hours	$+60^{\circ}\text{C} \pm 5^{\circ}\text{C} / 5\% \text{ RH}$

Packing Information

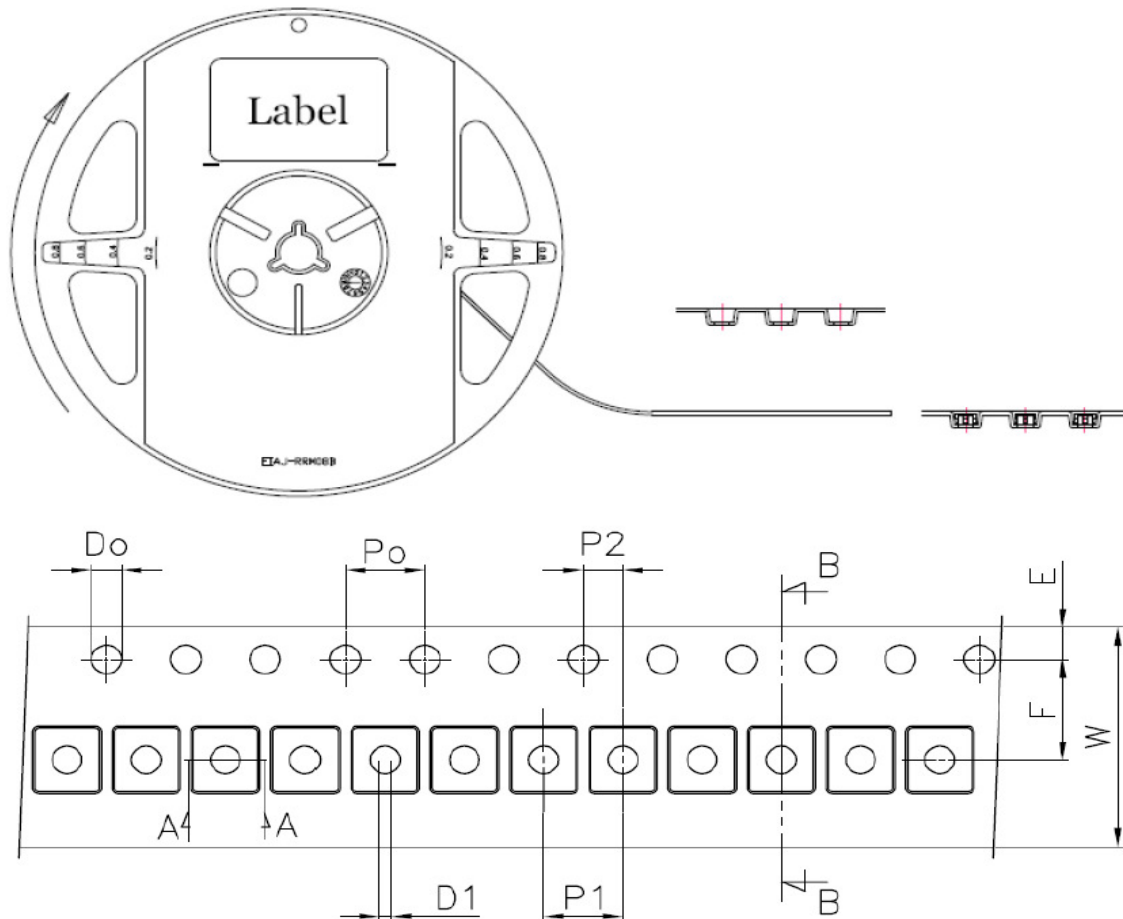


Figure 14. Reel specification (unit in mm)

Legal Notice

Product information provided by Plessey Semiconductors Limited (“Plessey”) in this document is believed to be correct and accurate. Plessey reserves the right to change/correct the specifications and other data or information relating to products without notice but Plessey accepts no liability for errors that may appear in this document, howsoever occurring, or liability arising from the use or application of any information or data provided herein. Neither the supply of such information, nor the purchase or use of products conveys any licence or permission under patent, copyright, trademark or other intellectual property right of Plessey or third parties.

Products sold by Plessey are subject to its standard Terms and Conditions of Sale that are available on request. No warranty is given that products do not infringe the intellectual property rights of third parties, and furthermore, the use of products in certain ways or in combination with Plessey, or non-

Plessey furnished equipments/components may infringe intellectual property rights of Plessey.

The purpose of this document is to provide information only and it may not be used, applied or reproduced (in whole or in part) for any purpose nor be taken as a representation relating to the products in question. No warranty or guarantee express or implied is made concerning the capability, performance or suitability of any product, and information concerning possible applications or methods of use is provided for guidance only and not as a recommendation. The user is solely responsible for determining the performance and suitability of the product in any application and checking that any specification or data it seeks to rely on has not been superseded.

Products are intended for normal commercial applications. For applications requiring unusual environmental requirements, extended temperature range, or high reliability capability (e.g. military, or medical applications), special processing/testing/conditions of sale may be available on application to Plessey.

Contact

Customer Enquiries/Sales

+44 1752 693000 | sales@plesseysemi.com | www.plesseysemi.com

Plessey Semiconductors Ltd | Plymouth
Tamerton Road, Roborough
Plymouth, Devon
PL6 7BQ
United Kingdom

P: +44 1752 693000

F: +44 1752 693700

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Power LEDs - White category:](#)

Click to view products by [Plessey manufacturer:](#)

Other Similar products are found below :

[G42180-08](#) [B42180-08](#) [STW8Q2PA-R5-HA](#) [SZ5-M1-W0-00-V3/W2-AA](#) [LTPL-P00DWS57](#) [LZP-D0WW00-0000](#) [CLM-9-30-90-36-AC32-F4-3](#) [SZ5-M1-WW-C8-V1/V3-FA](#) [BXRC-27E2000-D-73](#) [BXRC-27G2000-D-73](#) [BXRC-30E1000-D-73](#) [BXRC-30G2000-D-73](#) [BXRC-40E1000-D-73](#) [BXRE-30G2000-B-73](#) [BXRE-30G2000-C-73](#) [BXRE-50C2001-C-74](#) [CXM-22-27-80-54-AC30-F4-3](#) [XHP50B-00-0000-0D0UH245G](#) [XHP50B-00-0000-0D0HJ245G](#) [MP-5050-8100-27-80](#) [MP-5050-6100-65-80](#) [MP-5050-6100-50-80](#) [MP-5050-6100-40-80](#) [MP-5050-6100-30-80](#) [CXM-22-30-80-54-AC30-F4-3](#) [LTW-2835SZK57](#) [BXEM-50C0000-0-000](#) [WW-WNA30TS-U1\(M1\)](#) [KW CSLPM2.CC-8L8M-4L8N](#) [KW CSLPM2.CC-8L8M-4O9Q](#) [KW DPLS32.SB-6H6J-E5P7-EG-Z264](#) [L1V1-507003V500000](#) [CXM-22-35-80-36-AC10-F3-3](#) [KW3 CGLNM1.TG-Z6QF6-EBVFFCBB46-DFGA](#) [XHP50B-00-0000-0D0UG430H](#) [CXM-22-35-90-54-AC40-F5-3](#) [CXM-22-35-80-54-AC40-F5-3](#) [OSM51206E1N-0.8T](#) [OSW43020C1C](#) [MP161611032290](#) [MP-1616-2103-50-90](#) [KW CULPM1.TG-Z6RF7-ebvFfcbB46-65G5](#) [KW DMLS33.SG-Z6M7-EBVFFCBB46-8E8G-700-S](#) [XPGDWT-B1-0000-00EEA](#) [XHP70B-00-0000-0D0BP450E](#) [KW DMLN33.SG-7J7K-EBVFFCBB46-8E8G-200-S](#) [ASMT-MW05-NMNS1](#) [ASMT-MW06-NMNZ1](#) [KW DPLS33.KD-HIJG-D30D144-HN-22C2-120-S](#) [JR5050AWT-Q-B40EB0000-N0000001](#)