

Power-Cycling Series PC4,12,F1,3030,TA,W6 Thermal Cycling Module



The PowerCycling Series is a thermoelectric module (TEM) designed for thermal cycling between multiple temperature set points and is ideal for applications in healthcare [and others] where fast temperature changes are required. The module is specially constructed to reduce the amount of stress induced on the TE elements during operation. This product line has been tested to withstand 500K cycles without degradation in performance. The TEMs are assembled using Bismuth Telluride semiconductor material and thermally conductive Aluminum Oxide ceramics.

FEATURES

- High thermal cycling capability
- Precise temperature control
- Reliable solid state operation
- No sound or vibration
- RoHS Compliant

APPLICATIONS

- Molecular Diagnostics
- Clinical Diagnostics
- Analytical Instrumentation
- Electronic Enclosure Cooling
- Chillers (Liquid Cooling)

PERFORMANCE SPECIFICATIONS						
Hot Side Temperature (°C)	25°C	50°C				
Qmax (Watts)	33.4	36.7				
Delta Tmax (°C)	67	75				
Imax (Amps)	3.9	3.9				
Vmax (Volts)	14.4	16.4				
Module Resistance (Ohms)	3.36	3.78				

SUFFIX	THICKNESS	FLATNESS & PARALLELISM	HOT FACE	COLD FACE	LEAD LENGTH
TA	0.126"± 0.001"	0.001" / 0.001"	Lapped	Lapped	6"
ТВ	0.126"± 0.0005"	0.0005" / 0.0005"	Lapped	Lapped	6"

SEALING OPTION

SUFFIX	SEALANT	COLOR	TEMP RANGE	DESCRIPTION
RT	RTV	White	-60 to 204 °C	Non-corrosive, silicone adhesive sealant

Americas: +1 919.597.7300 Europe: +46.31.704.67.57 Asia: +86.755.2714.1166


ets.sales@lairdtech.com www.lairdtech.com



Power-Cycling Series PC4,12,F1,3030,TA,W6

Thermal Cycling Module

Performance Curves at Th = 25°C

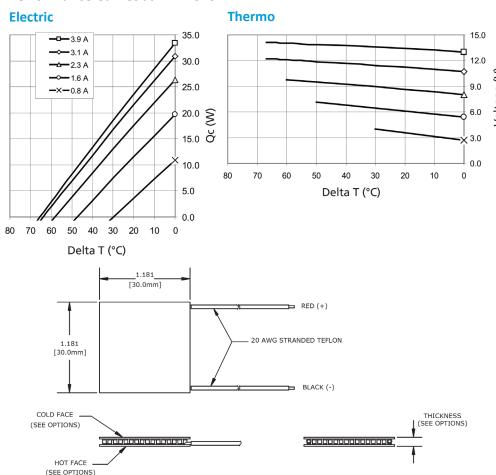

Ceramic Material: Alumina (Al₂O₂)

Solder Construction: 232°C, Tin Antimony (SnSb)

OPERATING TIPS

- Max Operating Temperature: 120°C
- Do not exceed Imax or Vmax when operating module
- Reference assembly guidelines for recommended installation
- Solder tinning also available on metallized ceramics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thermoelectric Modules category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

C3100-1980 C3200-0504 C3200-0505 C3200-371 C3400-0262 430084-505 430848-514 44710-500 430141-508 430005-517 CP85438
66101-500 CP40136 CP60133 CP60140 CP30238 CP20251 CP85338 CP20151 430082-502 430078-525 CP14,31,10,L1,W4.5
HT4,12,F2,4040,TA,W6 MS3,119,14,15,11,W8 MS5,257,10,15,11,W8 MS2,107,10,10,12,12,11,W8 ZT5,16,F1,4040,TA,W8 58910-501
UT15,200,F2,4040,TA,W6 UT8,288,F2,5252,TA,W6 UT8,200,F2,4040,TA,W6 CP12,161,04,L1,W4.5 430719-502
ET20,31,F1A,0909,11,W2.25 ET19,23,F1N,0608,11,W2.25 430362-502 HT8,12,F2,4040,TA,W6 430138-506 430078-501
PT6,12,F2,4040,TA,W6 430032-502 OT12,66,F0,1211,11,W2.25 OT12,12,F0,0406,11,W2.25 MS2,010,06,06,11,11, 11,W2,ET CP20247H
CP85301535 CP35447 CP60131H CPM-2F CP853345H