



Dimensions: mm (In.)

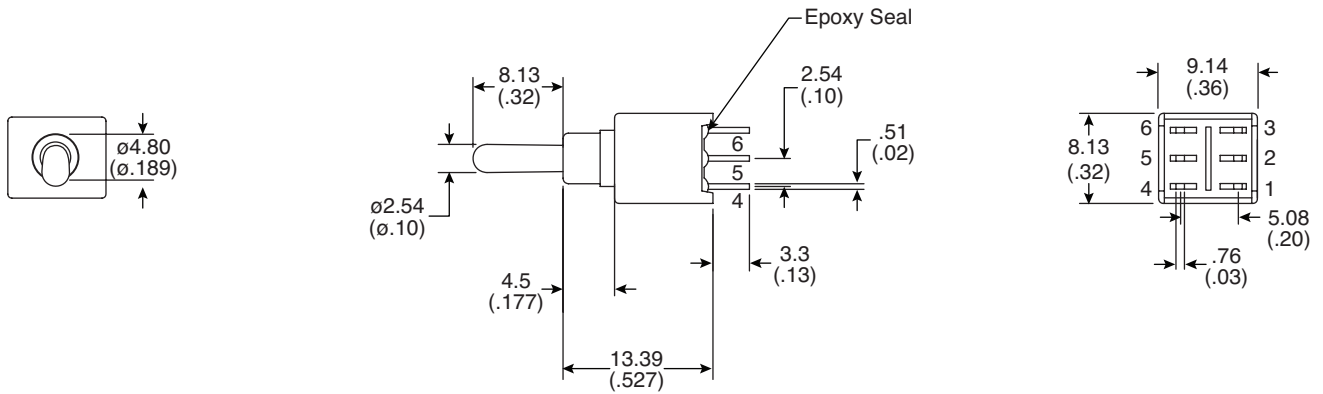

POS.1	POS.2	POS.3
ON	OFF	ON
2-3, 5-6		2-1, 5-4
	OPEN	

Switch Function

Electrical Specifications:

- Contact resistance: 20m Ω max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000M Ω min.
- Dielectric strength: 1,000 V RMS@sea level
- Rating: 1A / 250VAC; 3A / 120VAC or 28VDC

Mechanical Specifications:

- Mechanical life: 50,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Note:

- RoHS Compliant by Exemption

Sealed Sub-Miniature Toggle Switch
108-2AD3T3238-EVX



X-ON Electronics

Authorized Distributor

Click to view similar products for [Toggle Switches](#) category:

[M2012LL2W30](#) [M2013BB1W01](#) [M2024S3A1W06](#) [M2032SS1W01-BA](#) [M2044SS1W01-BC](#)
[6-1437558-4](#) [6-1437558-5](#) [64AT22-3D](#) [64AT34-5K](#) [66AT23-7](#)