

EKI-1242EIMS EKI-1242IEIMS

Modbus RTU/TCP to EtherNet/IP Fieldbus Gateway



Features

- Supports dual power input for power redundancy
- Seamless integrate Modbus RTU/TCP and EtherNET/IP communication
- Modbus Master mode supports 64 connections
- Mounts on DIN-rail and Wall mount
- Designed for protocol extensibility and adaption
- Built-in real time diagnostic to increase highly efficiency of device management
- 'I' models support a wide operating temperature

Introduction

The EKI-1242EIMS Industrial Fieldbus gateway providing seamless communication between Fieldbus and Industrial Ethernet and supports different protocol devices and integrates new and existing Modbus RTU/TCP devices to the EtherNet/IP network. To collect data and exchange data between Modbus RTU/TCP to EtherNet/IP, EKI-1242EIMS is a simple and cost-effective way to bring the advantages of fast data transmissions between different devices.

Specifications

Ethernet Communication

- **Protocols** EtherNet/IP, Modbus TCP
- **Number of Ports** 4
- **Speed** 10/100 Mbps, Auto MDI/MDIX
- **Connector** 8-pin RJ45
- **Protection** Built-in 1.5 KV magnetic isolation

Serial Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** 2
- **Protocol** Modbus RTU
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS
- **Baud Rate** 50 bps ~ 921.6 kbps
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DCD, RI, GND
RS-422: TxD+, TxD-, RxD+, RxD-, GND
RS-485: Data+, Data-, GND

Software

- **Modbus RTU/TCP**
 - Mode Master
 - Functions Support 1, 2, 3, 4, 5, 6, 15, 16, 23
 - Max. Number of Connections 64 connections
- **EtherNet/IP**
 - Class Adapter
 - Max. Number of Connections 32 explicit messaging, 5 implicit messaging
 - Max. Total I/O Data Size Input: 496 bytes
Output: 496 bytes

General

- **LED Indicators** System: Power, Syste, Protocol Status
LAN: Speed, Link/Active, Error
- **Reboot Trigger** Built-in WDT (watchdog timer)
- **MicroSD Card** Configuration backup and restore

Mechanics

- **Dimensions (W x H x D)** 42 x 140 x 95 mm (1.66" x 5.52" x 3.75")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight** 0.592 Kg

Power Requirements

- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Power Connector** Terminal block
- **Power Consumption** 5.2 W

Environment


- **Operating Temperature** -10 ~ 60 °C (14 ~ 140 °F)
'I' models: -40 ~ 75 °C (-40 ~ 167 °F)
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 10 ~ 95% RH

Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

Dimensions

Unit: mm [inch]

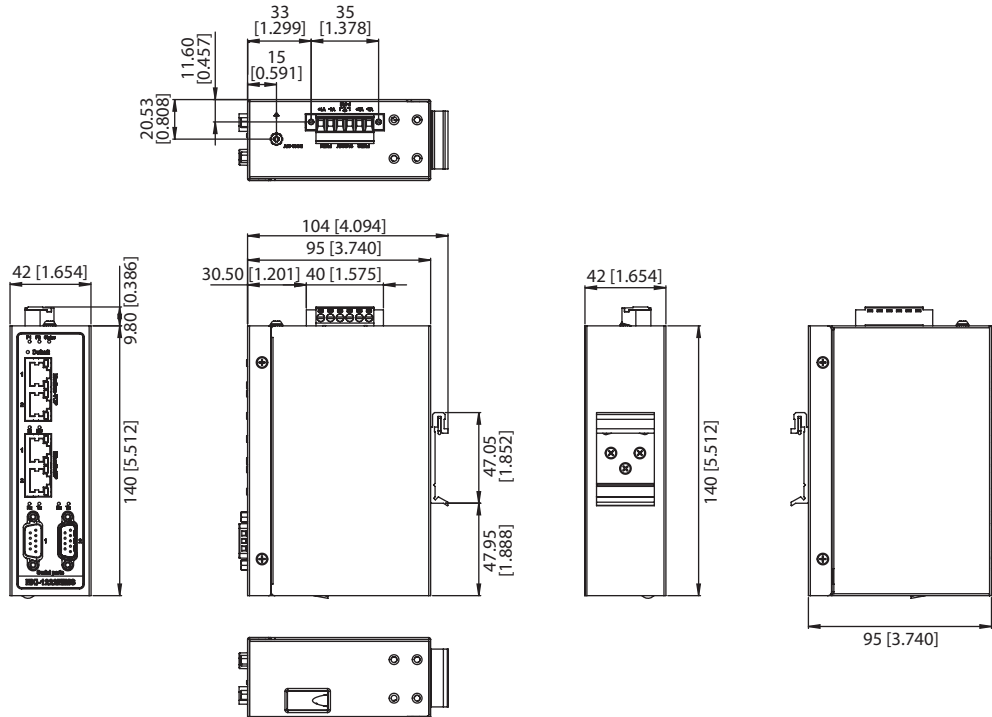

Ordering Information

- **EKI-1242EIMS** Modbus RTU/TCP to EtherNet/IP Fieldbus Gateway
- **EKI-1242IEIMS** Modbus RTU/TCP to EtherNet/IP Protocol Gateway with wide operating temperature

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Networking Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70002269](#) [70002279](#) [70002410](#) [70002412](#) [70002414](#) [WISE-3310-D200L1E](#) [XSDRSN-03](#) [70002259](#) [70002261](#) [70002263](#) [70002265](#)
[70002271](#) [70002277](#) [70002281](#) [70002324](#) [70002404](#) [70002406](#) [70002418](#) [X4-Z1U-B101-A](#) [X2E-Z1C-W1-W](#) [X2-Z11-EM-A](#) [X2E-Z4C-](#)
[D2-A](#) [X2-Z11-EM-W](#) [X4-Z1U-U901-A](#) [SEG308-T](#) [APAX-5070-BE](#) [DC-ES-8SB-EU](#) [DC-ES-4SB-SW-EU](#) [VESR321-ML](#) [SE305-T](#)
[716FX2-ST](#) [NTSFP-LX-10](#) [516TX](#) [708FX2-ST](#) [PXC2102H2-01-02-S](#) [1003GX2-B](#) [509FX-SC](#) [508TX-A](#) [SL30210110-SWH](#) [SE308-T](#)
[FCOPPER-SFP-100](#) [7506GX2](#) [708FX2-SC](#) [508TX](#) [316TX](#) [306TX](#) [306FX2-ST](#) [BB-SG30000324-51](#) [BNDL-MULT](#) [BNDL-MWF](#)