

10/100/1000 Mbps Ethernet Media Converter

iMcV-Giga-MediaLinX



PRODUCT FEATURES

- Available for multi-mode or single-mode fiber including SFP form factor
- Double fiber capacity with single-strand fiber versions
- Modular, hot-swappable architecture reduces operational costs associated with product installation, upgrades and maintenance
- SNMP Manageable
- Converts 10,100 or 1000 Mbps Copper to 1000 Mbps Fiber
- Supports Configuration Control
- Features Link Fault Pass-Through (SFP model)

Satisfying today's networking needs while preparing for tomorrow's cabling requirements can make designing and installing the physical layer of networks a daunting task. The decreasing cost of fiber optic cabling and switching equipment makes all-optical LANs the obvious choice when future-proofing network equipment. Replacing legacy equipment and wiring infrastructure is a costly choice. Managed media conversion allows implementation of new technologies on existing networks, while monitoring all connections, to keep networks running and up-to-date.

B+B SmartWorx offers a wide range of SNMP-managed Ethernet copper to fiber media converters, with a choice of fixed rate or rate conversion capabilities. The "iMcV-" modules also include troubleshooting features and LEDs to assist in network diagnostics as well as make isolating cable breaks easier. The iMcV-Giga-MediaLinX features Link Fault Pass-Through. In addition, support for Config Control, included only on the SFP model, is available if using SNMP management.

All converters feature an RJ-45 copper port and a fiber port, with a choice of SC or SFP connectors, and are hot-swappable. An SFP-form factor is also available, providing more flexibility.

Rate converters employ Auto Negotiation functionality on the twisted pair port for plug-and-play operation, or they can be manually configured for the desired speed and duplex mode.

ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET CONNECTOR
iMcV-Giga-MediaLinX TX/SFP with LFPT and Config Control					
856-15410	TX/SFP	1	Various	1	RJ-45
iMcV-Giga-MediaLinX TX/LX or SX 10/100/1000 Mbps with (LFPT) and Config Control					
856-11959	SX-MM850-ST	1	220/550 m	1	RJ45
856-11950	SX-MM850-SC	1	220/550 m	1	RJ45
856-11951	LX-SM1310-SC	1	10 km	1	RJ45
856-11952	LX-SM1310/PLUS-SC	1	40 km	1	RJ45
856-11953	LX-SM1550/LONG-SC	1	80 km	1	RJ45
856-11958	LX-SM1550/XLONG-SC	1	100 km	1	RJ45
SINGLE STRAND FIBER *					
856-11940	SSLX-SM1310-SC (1310xmt/1550rcv)	1	10 km	1	RJ45
856-11941	SSLX-SM1550-SC (1550xmt/1310rcv)	1	10 km	1	RJ45
856-11933	SSBX-SM1310-SC (1310xmt/1490rcv)	1	10 km	1	RJ45
856-11935	SSBX-SM1490-SC (1490xmt/1310rcv)	1	10 km	1	RJ45
856-11942	SSLX-SM1310/PLUS-SC (1310xmt/1550rcv)	1	40 km	1	RJ45
856-11943	SSLX-SM1550/PLUS-SC (1550xmt/1310rcv)	1	40 km	1	RJ45
856-11937	SSBX-SM1310/PLUS-SC (1310xmt/1490rcv)	1	30 km	1	RJ45
856-11939	SSBX-SM1490/PLUS-SC (1490xmt/1310rcv)	1	30 km	1	RJ45
856-11954	SSLX-SM1490/LONG-SC (1490xmt/1550rcv)	1	70 km	1	RJ45
856-11955	SSLX-SM1550/LONG-SC (1550xmt/1490rcv)	1	70 km	1	RJ45

* These products have single-strand fiber technology. Deploy in pairs or connect another compatible B+B IMC LLC single-strand fiber product.

iMcV-Giga-MediaLinX 10/100/1000Mbps also available in CWDM Fiber. Call for details.



iView: Windows 2000/XP/Vista/Win7

10/100/1000 Mbps Ethernet Media Converter

iMcV-Giga-MediaLinX



SPECIFICATIONS

TECHNICAL

IEEE 802.3 10Base-T
IEEE 802.3u 100Base-TX
IEEE 802.3ab 1000Base-T twisted pair
IEEE 802.3z 1000Base-LX or SX fiber
Supports packets up to 1632 bytes
Connectors: RJ-45 and ST, SC, LC or SFP
IEEE 802.3x Flow Control
AutoCross for MDI/MDIX
Features LinkLoss and FiberAlert
Features Link Fault Pass-Through (LFPT)
Features Auto Negotiation and Selective Advertising
Layer 2 packet switching, store and forward operation
Forwarding rate: 14,881 pps for 10 Mbps; 148,810 pps for 100 Mbps; 1,488,100 pps for 1000 Mbps (Gig only)
50/125µm or 62.5/125µm multi-mode fiber
9/125µm single-mode fiber
Available for single-strand fiber
Installs in any iMediaChassis or MediaChassis
Supports GUI-Based iView ²
Supports Half- and Full-Duplex operation
Includes diagnostic LEDs
Includes hot-swappable architecture

MECHANICAL

Dimensions	4.19"H x 0.78"W x 2.75"D (10.74 x 2 x 7.05 cm)
Shipping Weight	0.30 lbs (.11 kg)

ENVIRONMENTAL





Operating Temperature:	+32° to +122° F (0° to +50° C)
Storage Temperature:	-13° to +158° F (-25° to +70° C)
Operating Humidity	5% to 95% (non-condensing), 0 – 10,000 ft. altitude

REGULATORY APPROVALS

FCC Class B
CE

MECHANICAL DIAGRAM

(dimensions in inches)

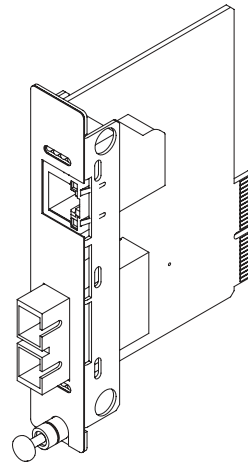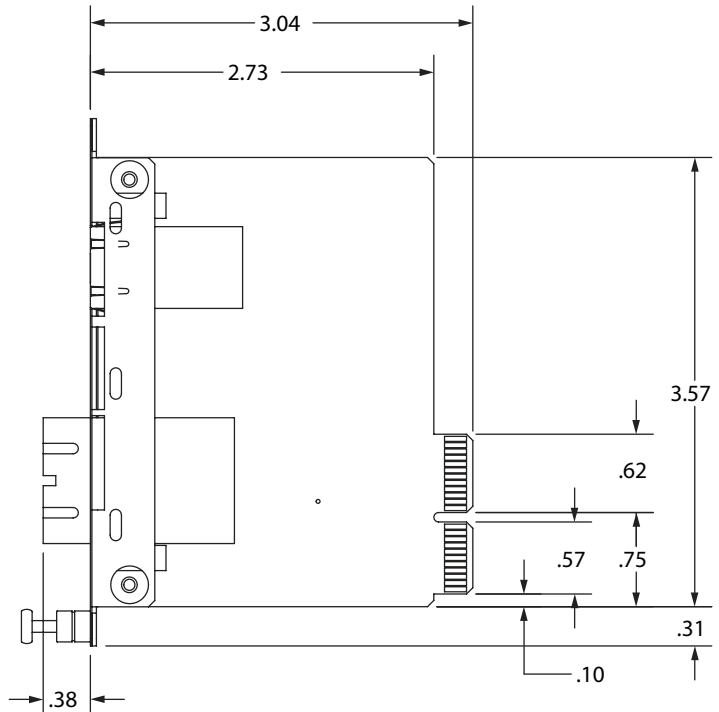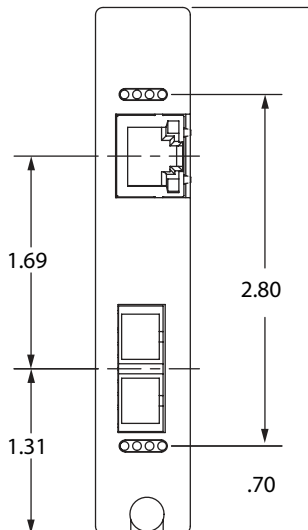

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)