






SFC-120-T2-L-D-A



SFC-110-T1-L-D-A



SFC-135-T2-L-D-A-K



(1.27 mm) .050"

SFC SERIES

COST-EFFECTIVE RELIABLE SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SFC

- Insulator Material:** Black Liquid Crystal Polymer
- Contact Material:** Phosphor Bronze
- Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Current Rating:** 3.1 A per pin (1 pin powered per row)
- Voltage Rating:** 350 VAC mated with TFC
- Operating Temp Range:** -55 °C to +125 °C
- Contact Resistance:** 15 mΩ
- Insertion Depth:** (3.05 mm) .120" to (4.06 mm) .160"
- Max Cycles:** 10,000 with 30 μ" (0.76 μm) Au
- RoHS Compliant:** Yes


Board Mates: TFC

Cable Mates: TFSO, TFSOT



High reliability Tiger Eye™ LITE contacts

(1.27 mm x 1.27 mm) .050" x .050" micro pitch

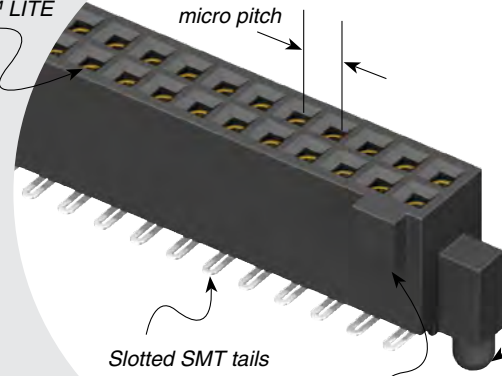

Slotted SMT tails

Alignment pin option

Polarized

PROCESSING

- Lead-Free Solderable:** Yes
- SMT Lead Coplanarity:** (0.10 mm) .004" max (04-25) (0.15 mm) .006" max (30-50)

RECOGNITIONS




For complete scope of recognitions see www.samtec.com/quality



SFC	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION
		04, 05, 10, 15, 20, 25, 30, 35, 40, 45, 50 (Standard sizes)	-T1 = Through-hole Tiger Eye™ LITE -T2 = Surface Mount Tiger Eye™ LITE	-F = Gold flash on contact, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail		-A = Alignment Pin -K = (4.00 mm) .157" DIA Polyimide film Pick & Place Pad -TR = Tape & Reel (-T2 only)

ALSO AVAILABLE (MOQ Required)

- Other sizes
- Contact Samtec.

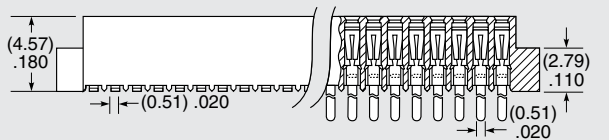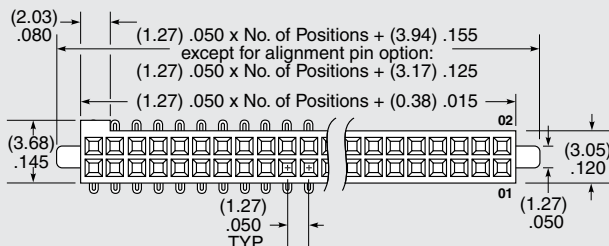

Note: Some sizes, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)