

## Signal lamp Tilted Diamond<sup>+</sup>, M12 Terminals, red

### 1.69.010.003/1300



#### General information

Form of lens	round protruding
Cap color/LED color	red
Diameter of collar	56.9 mm

#### Dimensions

Overall height	70.01 mm
----------------	----------

#### Mechanical design


Mounting	2 x screw
Terminals	M12, A-coded, 4-pin
Lamp	4 x LED


#### Electrical characteristics

Operating voltage $U_B$	24 V
-------------------------	------

#### Other specifications

Ambient temp. operating min.	-30 °C
Ambient temp. operating max.	+60 °C
Degree of protection from front side	IP 65/67
Weight	65 g
Operating life	50,000 h
ROHS compliant	yes
REACH compliant	yes

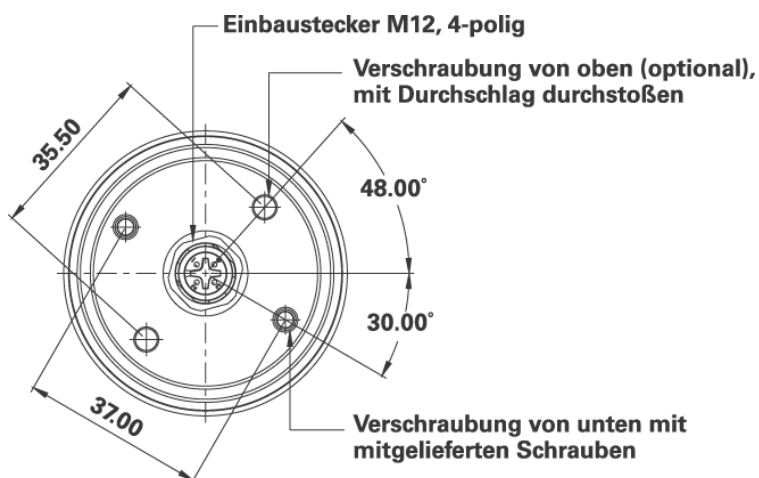



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Panel Mount Indicators](#) category:*

*Click to view products by [Rafi](#) manufacturer:*

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL589WL8R](#)  
[Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#) [NL2950CWL2R](#) [NL589WL2R](#)  
[NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22SIOL0RG](#) [PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LH1048BSWL3702](#) [LH1048BWL3702](#)  
[LH382A](#) [LHM62B](#) [SSI-LXH387USBD-150](#) [SSI-LXH9ZIC40587](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950WL7R](#) [FL2951WL8G](#)  
[FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#) [2191U5-12V](#) [2191U5-6V](#) [2191U7-12V](#) [249-4167-3734-504F](#) [Q6P5BXXG02E](#) [3990A7](#) [5110F3-12V](#) [MPC5BCW18.0](#) [556-1237-801F](#)