


Date Last Revised: 9-26-07

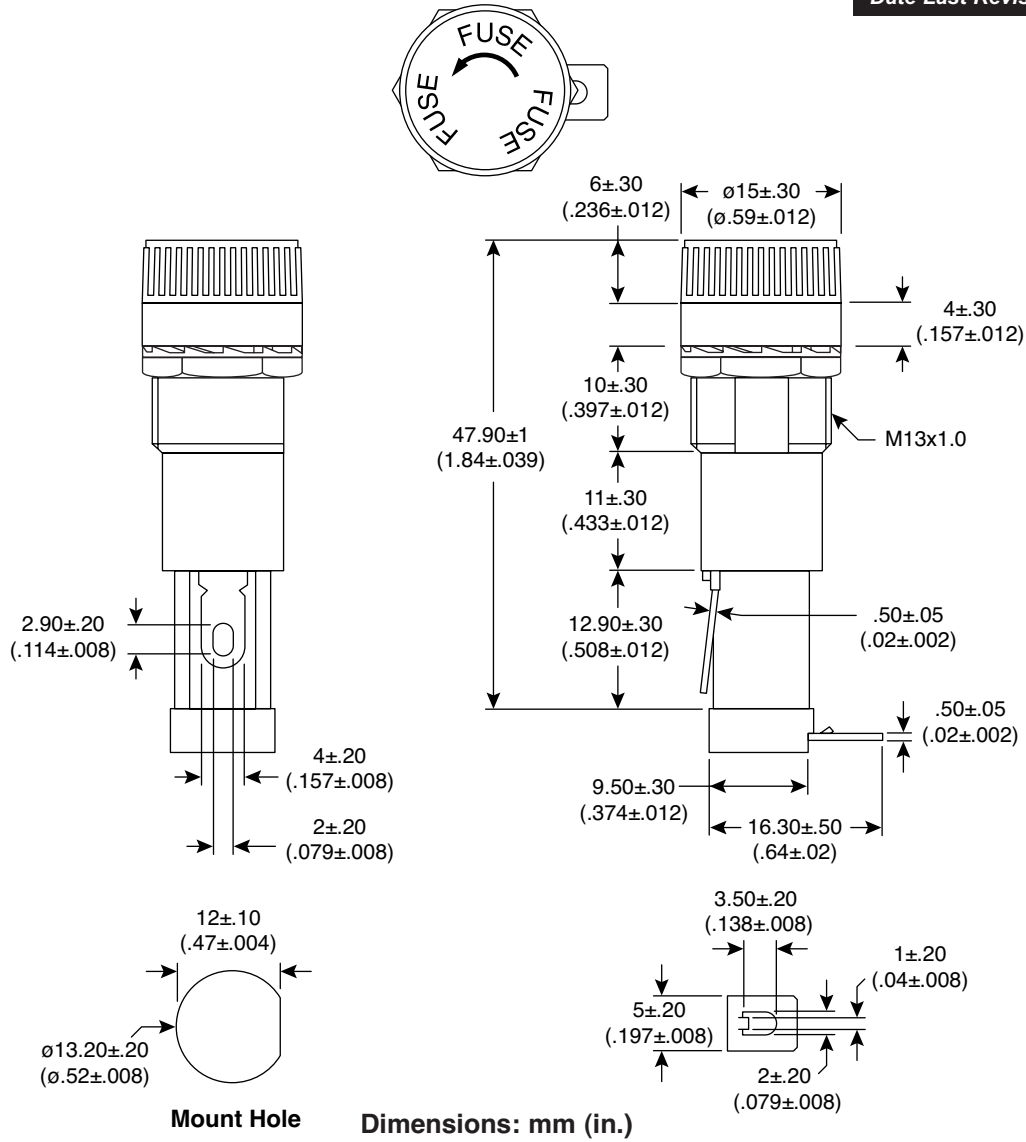

SPECIFICATIONS	
Rating:	15A/250VAC
Contact Resistance:	50m Ω Max.
Insulation Resistance:	500VDC 100M Ω Min.
Dielectric Strength:	1500VAC 1 minute
Fuse Size:	$\phi 6.4 \times 30$ L, $\phi 6.35 \times 31.8$ L
Body:	PBT Black
Cap:	PBT Red
RoHS Compliant by Exemption	

Available from Mouser Electronics
 1-800-346-6873 / www.mouser.com

EPD-200528

X-ON Electronics

Authorized Distributor

Click to view similar products for [Fuse Holder](#) category:

[D27B](#) [D27C](#) [FB2](#) [H25030-2C](#) [H60030-1PR](#) [H60030-3C](#) [H60060-3CR](#) [R25100-1COR](#)
[15595-428FQR1CM](#) [BG3013B](#)