


Dimensions: mm (In.)

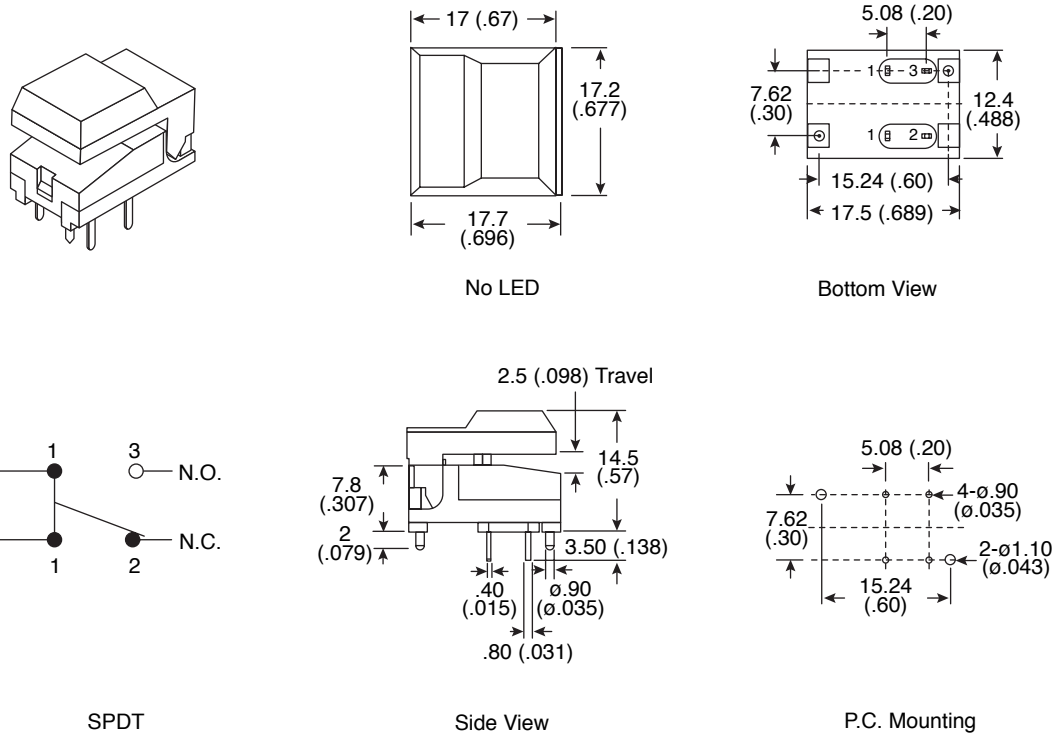

Electrical Specifications:

- Rating: 12mA/24VDC
- Test Voltage Cont.- Cont.: 150V
- Continuous Current Rating: 120mA
- Power Rating: 240mW
- Insulation Resistance: 100MΩ min.
- Contact Resistance: 50m Ω max.
- Capacitance Cont.-Cont.: 0.5pF max.

Note:

- RoHS compliant and process compatible with 260° solder

Materials:

- Housing: nylon
- Cap: ABS
- Fixed Contact: Gold plated copper alloy
- Moving Contact: Gold plated copper alloy

Mechanical Specifications:

- Contact Configuration: SPDT
- Contact Bounce: 5m sec max.
- Operating Force: 200gf max.
- Operating Travel: 2.5±0.2mm
- Operating Life: 500,000 cycles
- Function: Momentary

Mouser Stock No.	Cap Color	Type
107-DPS-11-1-EV	Black	SPDT
107-DPS-11-2-EV	Gray	SPDT
107-DPS-11-4-EV	Blue	SPDT
107-DPS-11-5-EV	Red	SPDT

Pushbutton Switches

107-DPS-11-1-EV 107-DPS-11-4-EV
 107-DPS-11-2-EV 107-DPS-11-5-EV



X-ON Electronics

Authorized Distributor

Click to view similar products for [Pushbutton Switches](#) category:

[65101K206X](#) [M7E-HRN2](#) [701PB580](#) [MB2011SB1W03-DF](#) [MB2061SS1W01-CF](#)

[MB2411JG01-H](#) [MB2411S1W01-HB](#) [9001KR1BH5](#) [9001KR9R05](#) [9001KXRK](#)