


Dimensions: mm (in.)

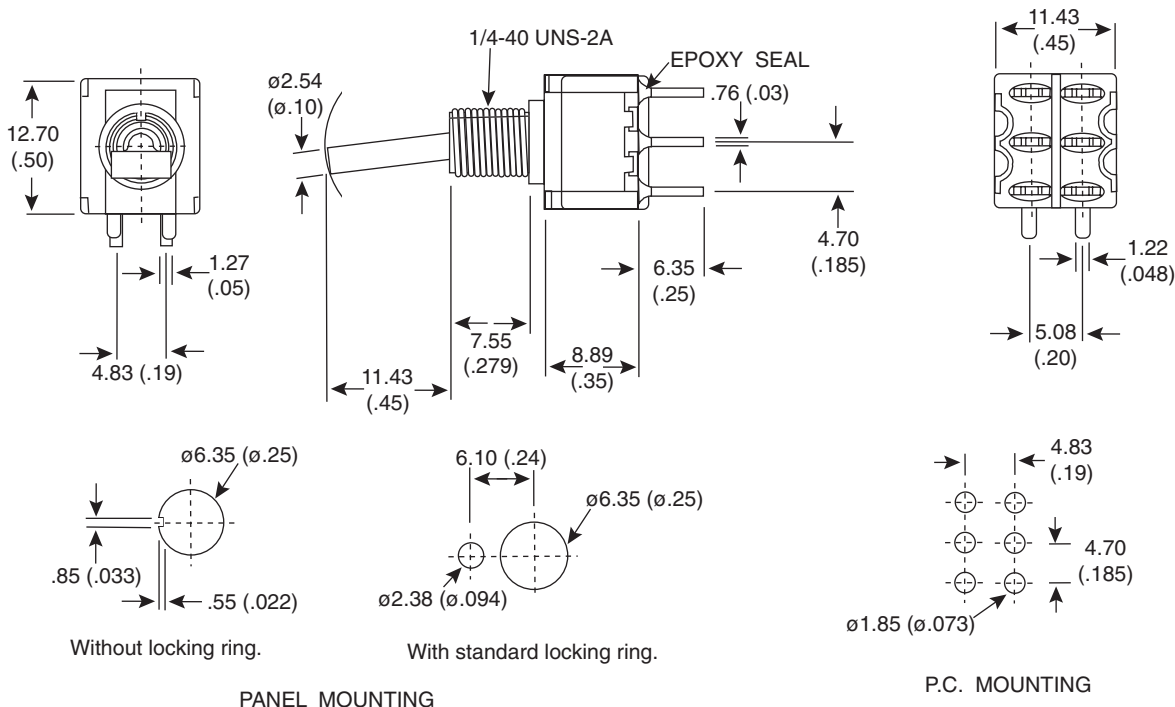


Without locking ring.

With standard locking ring.

PANEL MOUNTING

P.C. MOUNTING

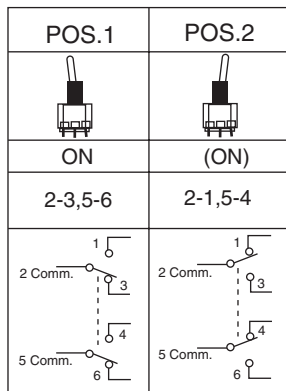

SWITCH FUNCTION

Electrical Specifications:

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS @ sea level
- Rating: 2A / 250VAC; 5 / 120VA or 28VDC

Mechanical Specifications:

- Operating Temperature: -30° C to +85° C

Note:

- RoHS compliant by exemption

Materials:

- Case: Diallyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Terminal / Contact: Silver plated
- Switch Support: Brass, tin plated

Toggle Switch
108-1MD2T6B1M2QE-EVX



X-ON Electronics

Authorized Distributor

Click to view similar products for [Toggle Switches](#) category:

[M2012LL2W30](#) [M2013BB1W01](#) [M2024S3A1W06](#) [M2032SS1W01-BA](#) [M2044SS1W01-BC](#)
[6-1437558-4](#) [6-1437558-5](#) [64AT22-3D](#) [64AT34-5K](#) [66AT23-7](#)