


SMD Power Inductor CDPH45D13F



Halogen
Free



Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 4.9 × 4.7 × 1.4mm Max.
- Product weight: 0.1g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 7.0" diameter reel
- 1000pcs per reel


Applications

- Ideally used in Mobile phone, PDA, HDD etc. as DC-DC Converter inductors

Dimension - [mm]

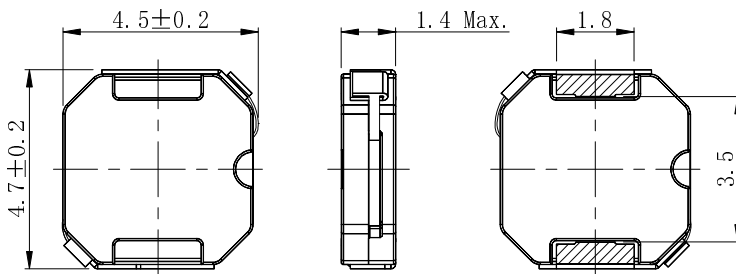

Land pattern and Schematics - [mm]

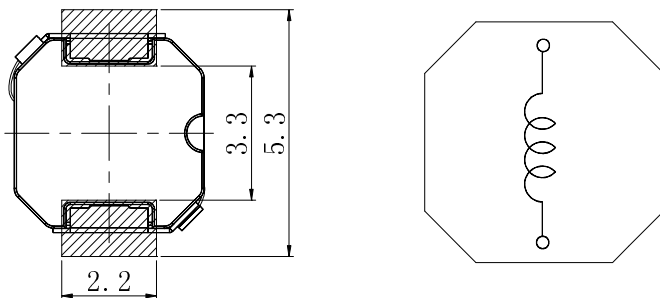

SMD Power Inductor CDPH45D13F



Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [within] ※1	D.C.R. ($m\Omega$) Max. (Typ.)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
CDPH45D13FHF-1R0NC	A	1.0 \pm 30%	53(42)	3.12(3.90)	2.45(2.79)
CDPH45D13FHF-1R2NC	B	1.2 \pm 30%	64(51)	3.00(3.75)	2.25(2.55)
CDPH45D13FHF-1R8NC	C	1.8 \pm 30%	75(60)	2.24(2.80)	2.00(2.25)
CDPH45D13FHF-2R4MC	D	2.4 \pm 20%	85(68)	2.16(2.70)	1.98(2.25)
CDPH45D13FHF-3R3MC	E	3.3 \pm 20%	96(77)	1.76(2.20)	1.80(2.05)
CDPH45D13FHF-3R9MC	F	3.9 \pm 20%	109(87)	1.68(2.10)	1.58(1.80)
CDPH45D13FHF-4R7MC	G	4.7 \pm 20%	146(117)	1.66(2.08)	1.46(1.67)
CDPH45D13FHF-5R6MC	J	5.6 \pm 20%	160(128)	1.40(1.75)	1.40(1.57)
CDPH45D13FHF-6R8MC	K	6.8 \pm 20%	175(140)	1.28(1.60)	1.35(1.56)
CDPH45D13FHF-100MC	L	10.0 \pm 20%	264(211)	1.04(1.30)	1.10(1.25)
CDPH45D13FHF-120MC	M	12.0 \pm 20%	349(279)	0.97(1.21)	0.95(1.08)
CDPH45D13FHF-150MC	P	15.0 \pm 20%	398(318)	0.86(1.08)	0.88(1.00)
CDPH45D13FHF-180MC	Q	18.0 \pm 20%	580(464)	0.76(0.95)	0.73(0.82)
CDPH45D13FHF-220MC	R	22.0 \pm 20%	644(515)	0.74(0.92)	0.66(0.75)

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of its nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDPH45D13F



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

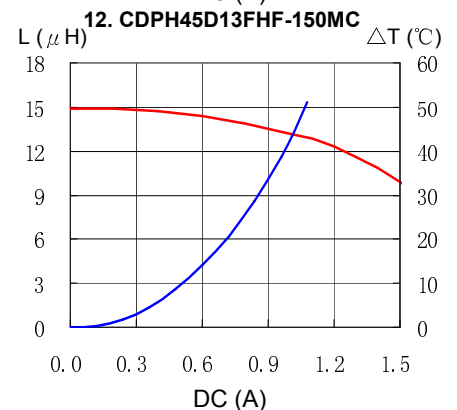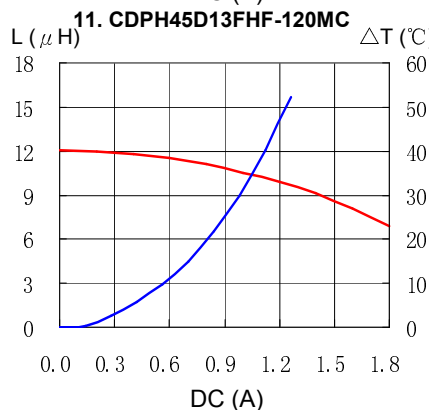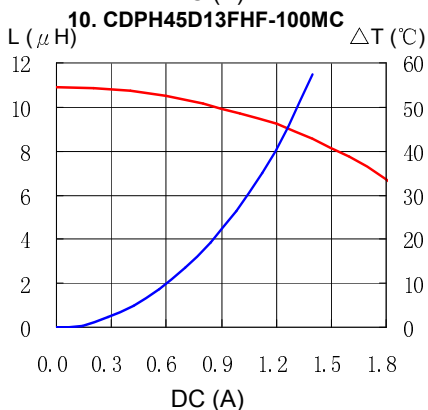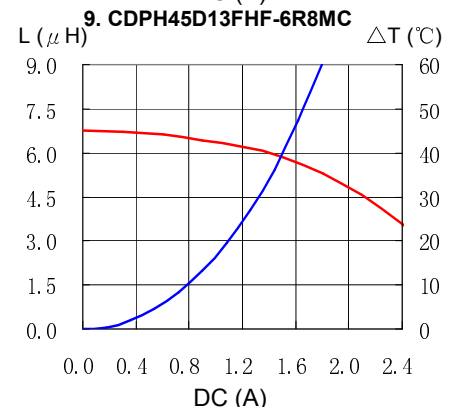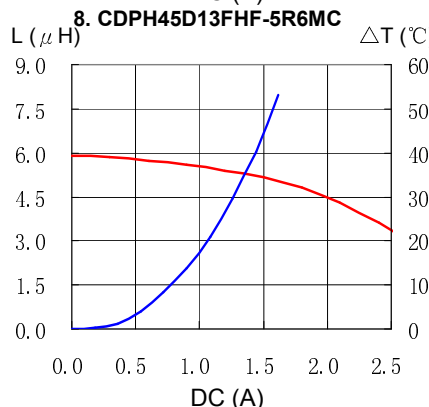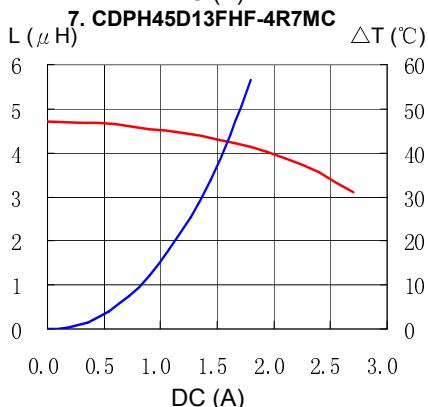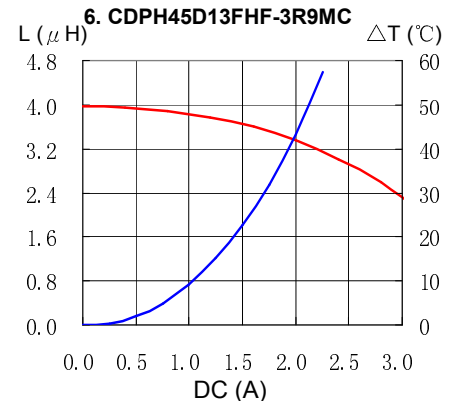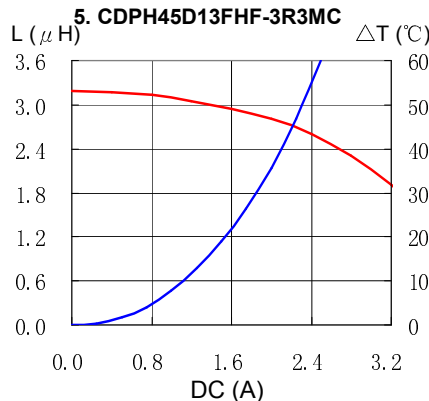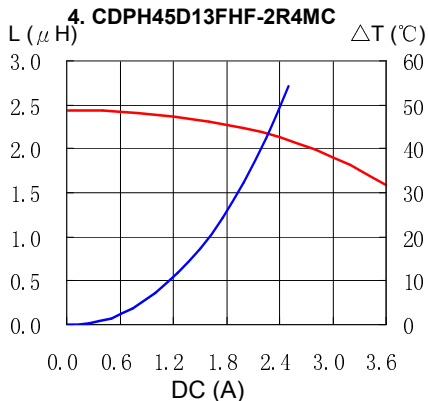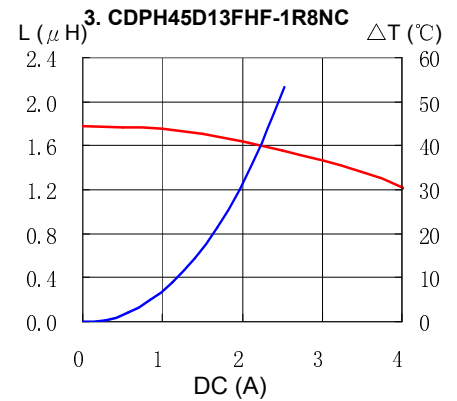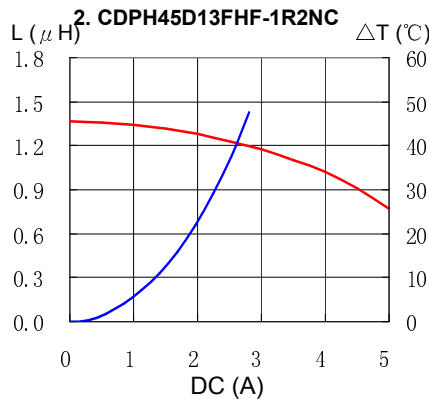
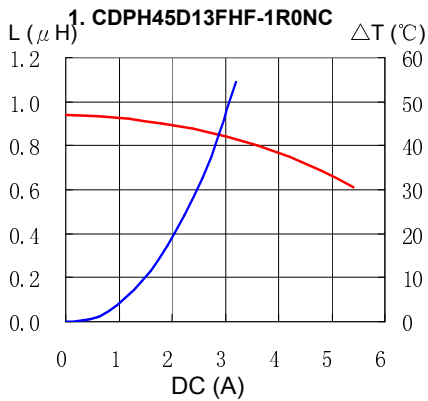


SMD Power Inductor CDPH45D13F





Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

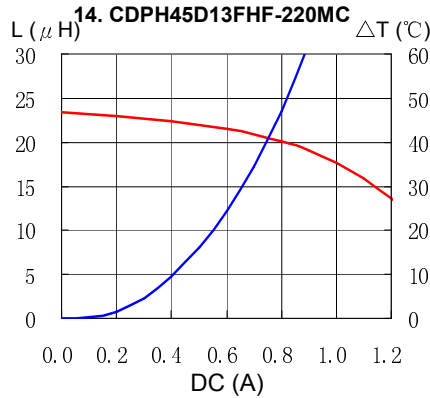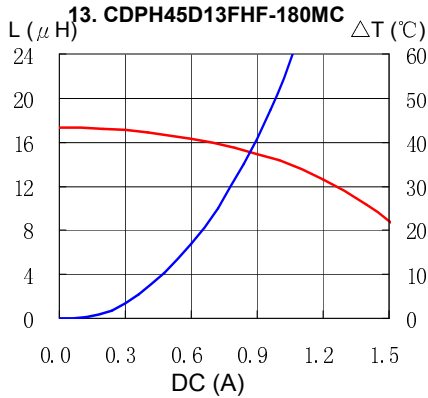

Solder Reflow Condition

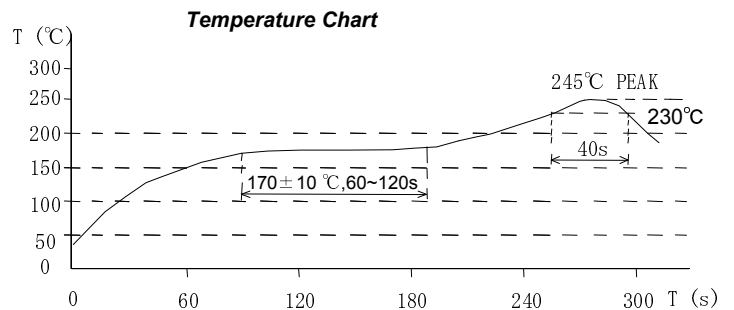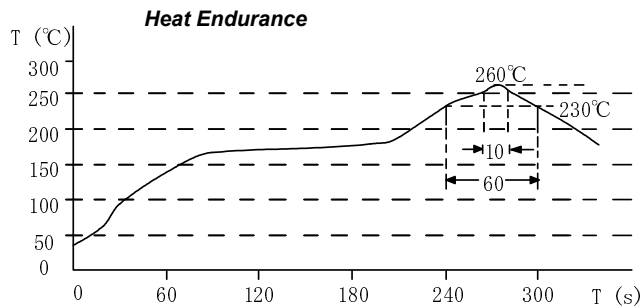

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)