

# 規格承認書

PECIFICATION FOR APPROVAL

客戶  
CUSTOMER : 立創

---

項目  
ITEM : 超声波传感器

---

型號  
TYPE : GU14095B-40TR

---

描述  
DESCRIPTION :  $\varnothing 14 \times H9.5\text{mm}$  40KHz 160mV 双角度 60+/-10% 1800pF

客戶料號  
CUSTOMER NO. :

---

規格書號  
SPECIFICATION NO. :

---

版本  
EDITION NO. : V1.1

---

日期  
DATE : 2016-4-5

---

## 客戶承認

### CUSTOMER CONFIRM AND SIGN

檢查 TESTED BY	審核 CHECKED BY	承認 APPROVED BY

## 東莞市贏海電子有限公司

### DONGUAN INGHAI ELECTRONICS CO.,LTD

製作 ISSUED BY	審查 CHECKED BY	確認 APPROVED BY
周明	刘承成	

地址：廣東省東莞市長安鎮上沙第五工业区新春 1 路新春科技园

電話 / TEL : 0769-83060958 傳真 / FAX : 0769-81608993

網址 : [HTTP://WWW.INGHAI.COM](http://www.inghai.com)

## A. Scope

This specification applies Ultrasonic sensor **GU14095B-40TR**


## B. Characteristics

- 1.1) Open structure and separate use
- 1.2) Compact and light weight
- 1.3) High sensitivity and sound pressure
- 1.4) Less power consumption
- 1.5) High reliability


## C. Technical terms

1	Center frequency(KHz)	40±1.0KHz
2	Sound Pressure Level (dB) 0dB=0.0002μbar	>100dB
3	Sensitivity (dB) 0dB=1 volt/μbar	>-74dB
4	Echo Sensitivity	≥160mV
5	Decay Time	≤1.2ms
6	Directivity (deg) X-axis	120±15
7	Directivity (deg) Y-axis	60±10
8	Capacitance (pF)	1800±15%
9	Allowable Maximum Input Voltage(Vp-p)	140(40KHz) Pulse width 0.5ms, interval 20ms
10	Operating Temperature(°C)	-40~+80
11	Storage temperature(°C)	-40~+85


## D. Drawing 焊线、插针可定制

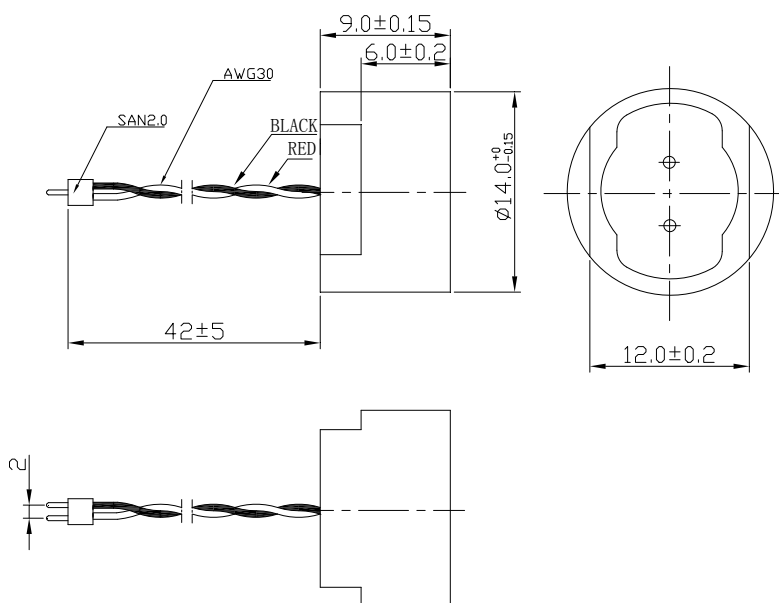

## E. Beam Patten

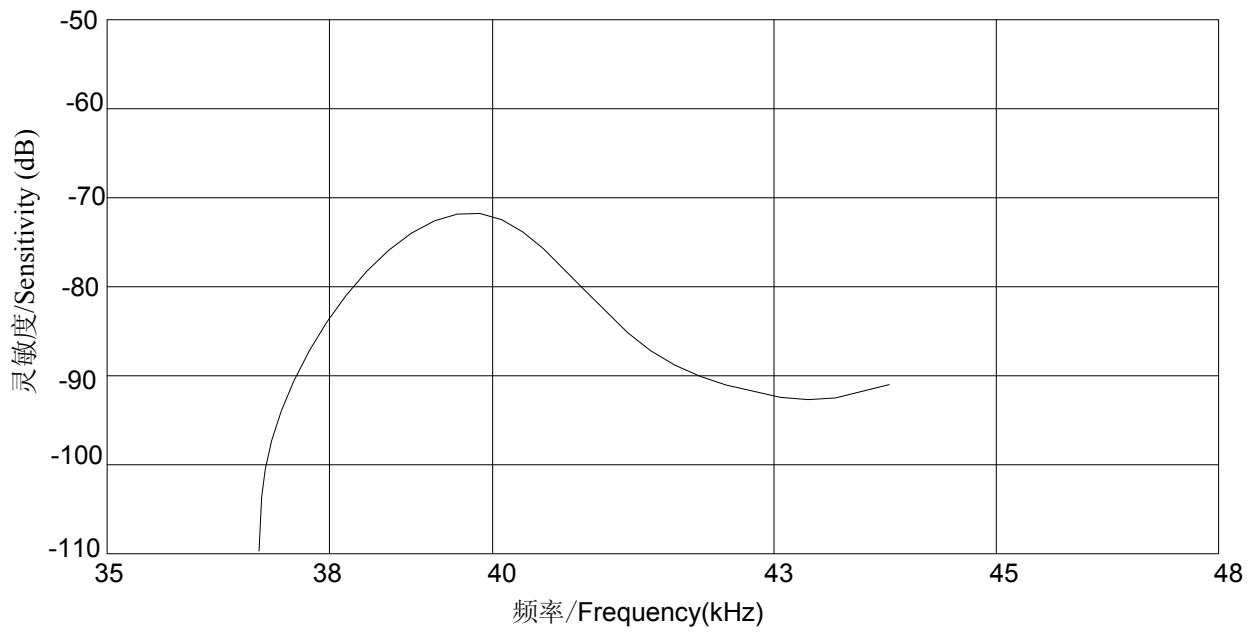

灵敏度-频率特性图/Sensitivity-Freq.Characteristics

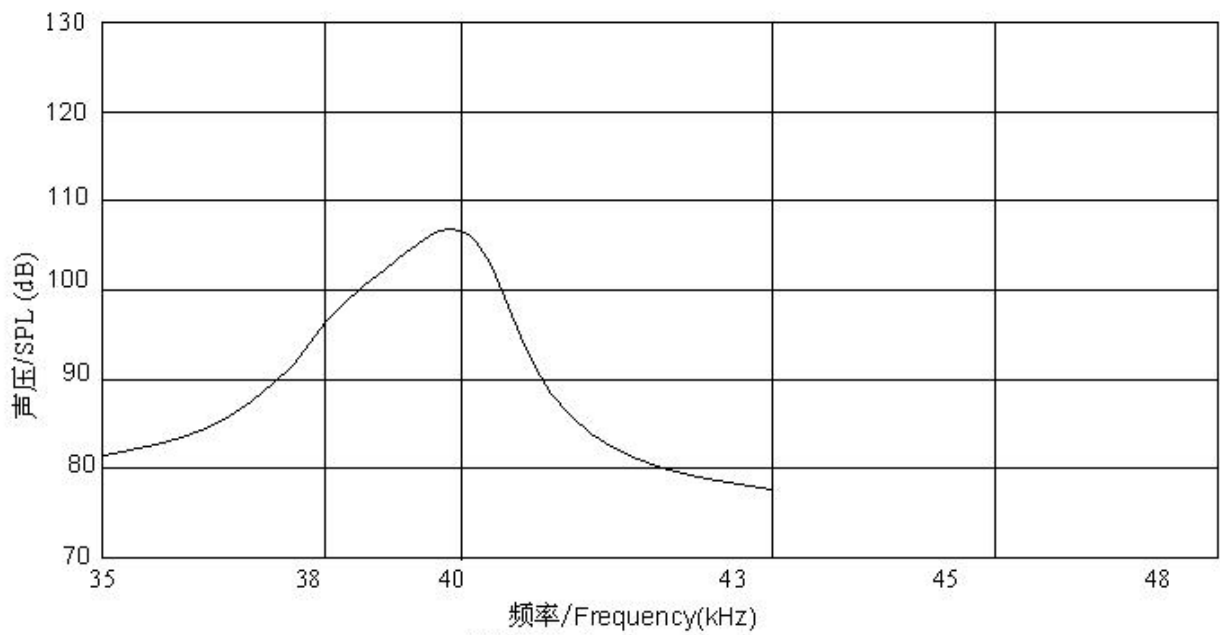

声压-频率特性图/SPL-Freq.Characteristics



指向性/Directivity in Sensitivity

### F. Test Circuit

Receiver



RL:  $3.9K\Omega$

U.S. :Ultrasonic Sensor

S.C.M:Standard Cappacitor Microphone


Amp. :Amplifier

OSC. :Oscillator

Sp :Tweeter

F.C. :Frequency Counter

Transmitter

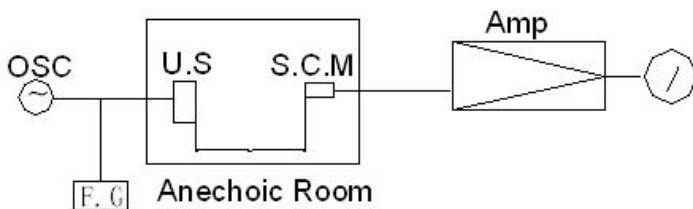

U.S. :Ultrasonic Sensor

S.C.M:Standard Cappacitor Microphone

Amp. :Amplifier

Input voltage:  $10V_{rms}$

F.C. :Frequency Counter

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [INGHAI](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)  
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N](#) [10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#)  
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)  
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM552A100](#) [SM952A126100LE](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#)  
[QT-08L](#) [34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IMM32188C](#) [IS2](#) [IS31SE5000-](#)  
[UTLS2-TR](#) [34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#)