



<b>PRODUCT SPECIFICATION</b>		Issue No. T-1-1014	Rev. 7
Customer:	GENERAL	Issue date: April 4, 1979	
Product Name:	SM Connector	Revision date: May 15, 2019	

This product specification contains the results of performance tests for the SM Connector.

– Index –

1. PART NAME, PART NUMBER & DRAWING NUMBER
2. CONSTRUCTION, DIMENSIONS, MATERIAL & SURFACE FINISH
3. CHARACTERISTICS
4. PERFORMANCE
  - 4.1 SPECIMEN
  - 4.2 TEST CONDITIONS
  - 4.3 REQUIREMENTS, TEST METHODS & TEST RESULTS
    - 4.3.1 Appearance
    - 4.3.2 Mechanical Performance Test
      - 4.3.2.1 Insertion Force (I.F.) & Withdrawal Force (W.F.)
      - 4.3.2.2 Crimp Tensile Strength
      - 4.3.2.3 Contact Retention Force
      - 4.3.2.4 Housing Lock Strength
      - 4.3.2.5 Panel Lock Strength
    - 4.3.3 Electrical Performance Test
      - 4.3.3.1 Contact Resistance
      - 4.3.3.2 Current Continuity
      - 4.3.3.3 Insulation Resistance
      - 4.3.3.4 Dielectric Withstanding Voltage
    - 4.3.4 Environmental Test
      - 4.3.4.1 Durability
      - 4.3.4.2 Humidity
      - 4.3.4.3 Heat Aging
      - 4.3.4.4 Thermal Shock
      - 4.3.4.5 Hydrogen Sulfide Gas
      - 4.3.4.6 Salt Spray
      - 4.3.4.7 Vibration
5. NOTICE



Prepared by: <i>T.Kusuda</i>	Checked by: <i>M.Ueda</i>	Reviewed by: <i>N.Tsuji</i>	Approved by: <i>H.Tomimoto</i>
---------------------------------	------------------------------	--------------------------------	-----------------------------------

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**1. PART NAME, PART NUMBER & DRAWING NUMBER**

Part Name	Part Number	Drawing Number
Socket contact	SHF-001T-0.8BS	KRD-10930-1
Pin contact	SYM-001T-0.6	KRD-2550-3
Receptacle housing	SMR-* <sub>1</sub> V-* <sub>2</sub>	KRD-10145-1
	SMR-18V-* <sub>2</sub>	KRD-5516-2
Plug housing	SMP-02VF-* <sub>2</sub>	KRD-14174-1
	SMP-* <sub>1</sub> V-* <sub>2</sub> C	KRD-10146-2
	SMP-18V-* <sub>2</sub> C	KRD-12352-2

Note<sub>1</sub>: Number of circuits in one or two-digit figure is indicated in \*<sub>1</sub>.

Note<sub>2</sub>: A character of an alphabet in color is indicated in \*<sub>2</sub>.

N: Natural (White), B: Black

**2. CONSTRUCTION, DIMENSIONS, MATERIAL & SURFACE FINISH**

Construction and dimensions shall be in accordance with the referenced drawings.  
Material and surface finish shall be as specified below.

Part Name	Material	Surface Finish, etc.
Socket contact	Phosphor bronze	Tin-plated
Pin contact	Brass	
Receptacle housing	PA 6	UL94V-0
Plug housing		

**3. CHARACTERISTICS**

Item	Rated Value	
Current rating	3 A (AC, DC)	
Voltage rating	250 V (AC, DC) (Note <sub>3</sub> )	
Temperature range	-25 to +85°C (Note <sub>4</sub> )	
Applicable wire	Conductor size	AWG #28 to #22 (0.08 to 0.33 mm <sup>2</sup> )
	Insulation O.D.	φ1.2 to φ1.8 mm

Note<sub>3</sub>: Except for the application of Electrical Appliance and Material Safety Law in Japan.

Note<sub>4</sub>: Including temperature rise in applying an electrical current.

**4. PERFORMANCE**

**4.1 SPECIMEN**

Part Name	Part Number
Socket contact	SHF-001T-0.8BS
Pin contact	SYM-001T-0.6
Receptacle housing	SMR-*V-B
Plug housing	SMP-*V-BC

Note<sub>5</sub>: Number of circuits in one or two-digit figure is indicated in \*.

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.2. TEST CONDITIONS**

- 1) When tested in accordance with the test condition and method specified in each item, each requirement shall be met.
- 2) Unless otherwise specified, tests shall be conducted under the following ambient conditions specified in JIS C 60068-1 (IEC 60068-1) [Basic Environmental Testing Procedures General and Guidance].

Temperature: 15 to 35 °C  
 Relative humidity: 25 to 75 %

- 3) For environmental tests, as a rule, the specimen assembled for actual use and a wire of UL1007 AWG #22 shall be used.

**4.3 REQUIREMENTS, TEST METHODS & TEST RESULTS**

**4.3.1 Appearance**

Requirement: There shall be no crack, deformation or discoloration which may affect the performance specified in this specification.

Test method: Visual inspection.

Test result: Good.

**4.3.2 Mechanical Performance Test**


**4.3.2.1 Insertion Force (I.F.) & Withdrawal Force (W.F.)**

Requirement:

No. of circuits	At Initial		At 30th
	I.F. (N max.)	W.F. (N min.)	W.F. (N min.)
2	19.6	1.0	0.8
3	24.5	1.5	1.0
4	29.4	2.0	1.2
5	34.3	2.5	1.5
6	39.2	2.9	2.0
7	44.1	3.4	2.5
8	49.0	3.9	2.9
9	49.0	4.4	3.4
10	53.9	4.9	3.9
11	53.9	5.4	4.4
12	58.8	5.9	5.9
18	118	17.6	9.8

Test method: A receptacle housing with crimped pin contacts and a plug housing with crimped socket contacts shall be mated and unmated on the same axis. Initial insertion and withdrawal forces, and withdrawal force at 30th shall be measured, removing the housing lock. (Testing speed: 1 to 5 mm/sec.)

The housing lock shall be removed.

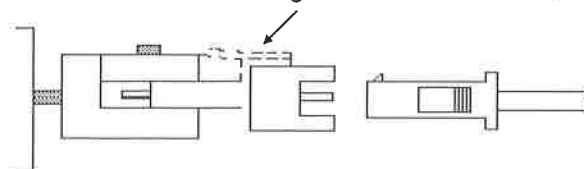

<b>JST</b>	Product Name: SM Connector	No.	T-1-1014
------------	----------------------------	-----	----------

Test result: UNIT: N

No. of circuits	Items	Ave.	Max.	Min.
2	Initial I.F.	10.0	11.8	7.8
	Initial W.F.	4.6	5.9	3.9
	W.F. at 30th	2.8	3.9	2.0
3	Initial I.F.	12.0	14.7	10.8
	Initial W.F.	6.6	7.8	5.9
	W.F. at 30th	3.7	4.9	2.9
4	Initial I.F.	17.9	19.6	15.7
	Initial W.F.	8.6	9.8	7.8
	W.F. at 30th	4.7	5.9	3.9
5	Initial I.F.	21.1	22.5	18.6
	Initial W.F.	10.9	12.7	9.8
	W.F. at 30th	5.4	6.9	3.9
6	Initial I.F.	25.8	27.4	22.5
	Initial W.F.	12.7	14.7	11.8
	W.F. at 30th	6.3	7.8	4.9
7	Initial I.F.	27.3	29.4	26.5
	Initial W.F.	13.5	14.7	11.8
	W.F. at 30th	7.2	8.8	5.9
8	Initial I.F.	28.8	30.4	26.5
	Initial W.F.	14.4	15.7	11.8
	W.F. at 30th	8.2	8.8	6.9
9	Initial I.F.	31.7	33.3	30.4
	Initial W.F.	14.8	16.7	12.7
	W.F. at 30th	8.3	11.8	6.9
10	Initial I.F.	35.2	37.2	32.3
	Initial W.F.	15.3	17.6	12.7
	W.F. at 30th	10.9	11.8	9.8
11	Initial I.F.	37.0	39.2	35.3
	Initial W.F.	16.1	17.6	14.7
	W.F. at 30th	11.3	11.8	9.8
12	Initial I.F.	40.0	42.1	38.2
	Initial W.F.	17.6	18.6	16.7
	W.F. at 30th	11.6	12.7	10.8
18	Initial I.F.	80.1	86.2	74.5
	Initial W.F.	33.1	37.2	30.4
	W.F. at 30th	18.6	20.6	17.6


n=10

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.3.2.2 Crimp Tensile Strength**

Requirement:

Wire to be used		Requirements (N min.)
AWG #28	0.08 mm <sup>2</sup>	9.8
AWG #26	0.13 mm <sup>2</sup>	14.7
AWG #24	0.21 mm <sup>2</sup>	19.6
AWG #22	0.33 mm <sup>2</sup>	34.3

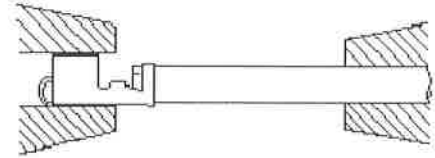

Test method: Pulling load shall be applied between a correctly crimped contact and a wire. The load required to pull the wire out of the contact or break the wire shall be measured. (Testing speed: 25 mm/min.)

Test result:

[Socket contact]				UNIT: N
Wire size	Ave.	Max.	Min.	
AWG #28	19.8	23.5	14.7	
AWG #26	37.4	41.2	32.3	
AWG #24	52.5	57.8	48.0	
AWG #22	81.1	84.3	76.4	

n=20

[Pin contact]				UNIT: N
Wire size	Ave.	Max.	Min.	
AWG #28	19.3	22.5	16.7	
AWG #26	37.3	40.2	34.3	
AWG #24	57.3	62.7	53.9	
AWG #22	78.6	83.3	73.5	

n=20

**4.3.2.3 Contact Retention Force**

Requirement: 19.6 N min.

Test method: A crimped contact shall be inserted into a housing and pulled in the axial direction. The load required to pull the contact out of the housing shall be measured. (Testing speed: 1 to 5 mm/sec.)

Test result:				UNIT: N
	Ave.	Max.	Min.	
Socket contact	48.4	56.8	41.2	
Pin contact	38.7	42.1	34.3	


n=50

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.3.2.4 Housing Lock Strength**

Requirement: 9.8 N min.

Test method: A receptacle housing and a plug housing shall be mated, and pulling load shall be applied to them. The load required to unlock the housing lock shall be measured. Contacts shall not affect housing lock strength. (Testing speed: 1 to 5 mm/sec.)



Test result: UNIT: N


No. of circuits	Ave.	Max.	Min.
2-circuit	30.6	34.3	27.4
3-circuit or more	35.9	38.2	32.3

n=10

**4.3.2.5 Panel Lock Strength**

Requirement: 78.4 N min.

Test method: A load shall be applied to the plug housing by the method shown in the figure below. The load required to separate the housing from the panel shall be measured. (Testing speed: 1 to 5 mm/sec.)

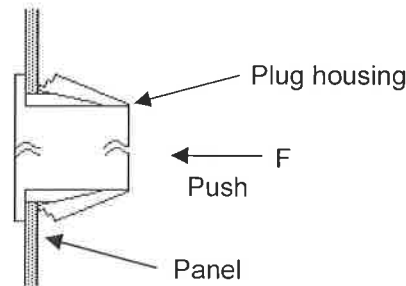

(Panel dimension: KRD-16083-1)

Test result: UNIT: N

Max.	Min.	Ave.
136	153	116

n=10


<b>JST</b>	Product Name: SM Connector	No.	T-1-1014
------------	----------------------------	-----	----------

**4.3.3 Electrical Performance Test**

**4.3.3.1 Contact Resistance**

Requirement: Initial: 10 mΩ max.  
 After tests: 20 mΩ max.

Test method: Contact resistance between points A and B of a specimen assembled for actual use as shown in the figure on the right side shall be measured under the following conditions.

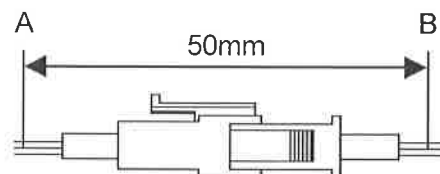

Test current: 10 mA (DC)  
 Open voltage: 20 mV max.  
 Wire to be used: AWG #22

Test result: See each environmental test item.

**4.3.3.2 Current Continuity**

Requirement: There shall be no current discontinuity longer than 1 microsecond during the vibration test.

Test method: Each circuit of a specimen assembled for actual use shall be connected in series and test current of 10 mA (DC) shall be applied. Current discontinuity longer than 1 microsecond during the test shall be detected by continuity meter.

Test result: See vibration test item.

**4.3.3.3 Insulation Resistance**

Requirement: Initial: 500 MΩ min.  
 After test: 300 MΩ min. (Humidity test)

Test method: 500 VDC shall be applied between the outer surface of a housing and a contact and also between adjacent contacts of a mated specimen to measure insulation resistance.

Test result: UNIT: MΩ

Items	Housing-Contact	Contact-Contact
Initial	1,000 min.	1,000 min.
After humidity test	1,000 min.	1,000 min.

n=10

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.3.3.4 Dielectric Withstanding Voltage**

Requirement: There shall be no breakdown or flashover.

Test method: Testing voltage specified below shall be applied between the outer surface of a housing and a contact and also between adjacent contacts of a mated specimen for one minute.

Initial: 1,500 VAC  
 After test: 1,000 VAC (Humidity test)

Test result:

Items	Housing-Contact	Contact-Contact
Initial	Good.	Good.
After humidity test	Good.	Good.

n=10

**4.3.4 Environmental Test**

**4.3.4.1 Durability**

Requirement: Contact resistance shall be 20 mΩ max. after the test.

Test method: A receptacle housing with crimped pin contacts and a plug housing with crimped socket contacts shall be mated and unmated. After repeated 30 cycles, contact resistance shall be measured.

Test result:

UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.20	7.9	7.0	7.37	8.3	7.0

n=20

**4.3.4.2 Humidity**

Requirement: Contact resistance shall be 20 mΩ max. after the test.  
 Insulation resistance shall be 300 MΩ min. after the test.  
 There shall be no breakdown or flashover on the dielectric withstanding voltage test.

Test method: The specimen shall be placed in a humidity chamber of the following conditions. After the test, contact resistance, insulation resistance, dielectric withstanding voltage and capacitance shall be measured.

Temperature: 40 ± 2°C  
 Relative humidity: 90 to 95%  
 Period: 240 hours

Test result:

UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.20	7.9	7.0	7.51	8.0	7.2

n=20



<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.3.4.3 Heat Aging**

Requirement: Contact resistance shall be 20 mΩ max. after the test.

Test method: The specimen shall be placed in a heat oven of the following conditions.  
After the test, contact resistance shall be measured.

Temperature: 85 ± 2°C  
Period: 250 hours

Test result: UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.31	7.7	7.0	7.47	8.1	7.1

n=20

**4.3.4.4 Thermal Shock**

Requirement: Contact resistance shall be 20 mΩ max. after the test.

Test method: The specimen shall be subjected to a thermal shock test of the following conditions.  
After the test, contact resistance shall be measured.

1 cycle consists of:  
-55 ± 3°C for 30 minutes  
+85 ± 2°C for 30 minutes  
Total cycles: 25 cycles

Test result: UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.02	7.3	6.8	7.56	7.8	6.8

n=20

**4.3.4.5 Hydrogen Sulfide Gas**

Requirement: Contact resistance shall be 20 mΩ max. after the test.

Test method: The specimen shall be subjected to hydrogen sulfide gas of the following conditions.  
After the test, contact resistance shall be measured.

Concentration: 3 ± 1 ppm  
Temperature: 40 ± 2°C  
Relative humidity: 80 ± 5%  
Period: 240 hours

Test result: UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.19	7.4	6.9	7.37	7.9	7.0

n=20

<b>JST</b>	Product Name: SM Connector	No. T-1-1014
------------	----------------------------	--------------

**4.3.4.6 Salt Spray**

Requirement: Contact resistance shall be 20 mΩ max. after the test.

Test method: The specimen shall be subjected to a salt spray test of the following conditions. After the test, it shall be washed with running water and dried naturally before the measurement of contact resistance.

1 cycle consists of:  
 Temperature: 35 ± 2°C  
 Concentration: 5% in weight  
 Period: Spray ON: 8 hours  
           OFF: 16 hours  
 Total cycle: 3 cycles

Test result: UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.15	7.9	7.0	7.56	8.7	7.1

n=20

**4.3.4.7 Vibration**

Requirement: Contact resistance shall be 20 mΩ max. after the test. There shall be no current discontinuity longer than 1 microsecond during the test.

Test method: The specimen mounted on a printed circuit board (PCB) shall be subjected to a vibration test of the following conditions. During the test, current continuity shall be checked. After the test, contact resistance shall be measured.

Frequency: 10-55-10 Hz/minute  
 Amplitude: 1.5 mm  
 Direction: Each of X, Y and Z-axis directions  
           \*Each axis shall be at right angles to others.  
 Period: 2 hours for each direction

Test result: UNIT: mΩ

Test item	Initial			After the test		
	Ave.	Max.	Min.	Ave.	Max.	Min.
Contact resistance	7.08	7.4	6.8	7.59	8.4	7.0

n=20

Current continuity	There was no current discontinuity longer than 1 microsecond.
--------------------	---

**5. NOTICE**

The occurrence of breaking or cracking (stress corrosion cracking) of contact by the moisture (condensation, etc.) and the corrosive gas such as ammonia and sulfur may cause of the contact failure, when the contact material of the terminals or connectors is a brass. If the place of use of terminals or connectors and their equipment is expected to influence of the corrosive gases such as ammonia and sulfur as described in the above, please use the phosphor bronze type product (Product specification No.T-1-1230).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [JST](#) manufacturer:*

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62149-1](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#)