


# Metal thin film chip resistors (Ultra-precision)

■ RG series (This series now includes the former RGH series.) AEC-Q200 Compliant

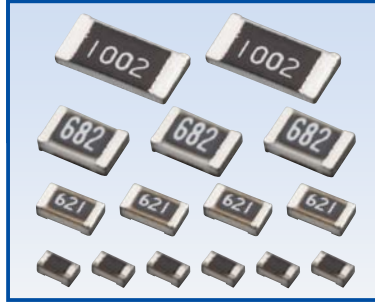

## Features

- Ultimate chip resistors: the result of all of our thin film technology expertise including inorganic passivation
- Resistance drift: less than +/-0.1% after 10000 hour accelerated reliability test
- +/-0.02% of resistance tolerance and +/-5ppm/°C of temperature coefficient of resistance
- Excellent tolerance to power surges


## Applications

- Any applications that require precision resistors such as automotive electronics, industrial test and measurement equipment, and consumer electronics

## Specifications

\*Standard stock item: E-24 series with TOR P, Q, and R grades, as well as tolerance D and B grades. Other E-24 grades and E-96 series are made to order

### Dimensions



Dimension (inch)	RG1005 (0402) OLD:RGH1005-2B included	RG1608 (0603) OLD:RGH1608-2C included	RG2012 (0805) OLD:RGH2012-2E included	RG3216 (1206)
L	1.00±0.05	1.60±0.20	2.00±0.20	3.20±0.20
W	0.50±0.05	0.80±0.20	1.25±0.20	1.60±0.20
A	0.20±0.10	0.30±0.20	0.40±0.20	0.50±0.25
B	0.25±0.05	0.30±0.20	0.40±0.20	0.50±0.20
T	0.35±0.05	0.40±0.10	0.40±0.10	0.40±0.10

unit : mm

NOTE Obsolete : RGH1005-2B (0402) RGH:1608-2C (0603) RGH2012-2E (0805)  
Alternative P/N : RG1005 (0402) RG1608 (0603) RG2012 (0805)

### Electrical characteristics

Series name	RG1005				RG1608					
Rated power*1	High power application: 1/8W (OLD: RGH1005-2B) Regular power application: 1/16W High precision: 1/32W				1/6W (OLD: RGH1608-2C) 1/10W 1/16W					
E series offered	E-24, E-96									
Resistance range (Ω)	10~46.4	47~97.6	100~2.94k	3k~100k	10~46.4	47~97.6	100~4.99k	5.1k~270k	274k~332k	340k~360k
Resistance tolerance (%)	±0.02% (P)	—	—	—	—	—	—	—	—	—
	±0.05% (W)	—	—	—	—	—	—	—	—	—
	±0.1% (B)	—	—	—	—	—	—	—	—	—
	±0.25% (C)	—	—	—	—	—	—	—	—	—
	±0.5% (D)	—	—	—	—	—	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	—	—	—	—	—
	±10 (N)	—	—	—	—	—	—	—	—	—
	±25 (P)	—	—	—	—	—	—	—	—	—
	±50 (Q)	—	—	—	—	—	—	—	—	—
	±100 (R)	—	—	—	—	—	—	—	—	—
Maximum voltage	75V				100V					
Operating temperature	-55°C~155°C				-55°C~155°C					
Packaging	5,000pcs CodeT5 10,000pcs CodeT10				CodeT5					

Series name	RG2012				RG3216				
Rated power*1	High power application: 1/4W (OLD: RGH2012-2E) Regular power application: 1/8W High precision: 1/10W				1/4W 1/8W				
E series offered	E-24, E-96								
Resistance range (Ω)	10~46.4	47~97.6	100~10k	10.2k~475k	487k~1M	10~46.4	47~97.6	100~33.2k	34k~1M
Resistance tolerance (%)	±0.02% (P)	—	—	—	—	—	—	—	—
	±0.05% (W)	—	—	—	—	—	—	—	—
	±0.1% (B)	—	—	—	—	—	—	—	—
	±0.25% (C)	—	—	—	—	—	—	—	—
	±0.5% (D)	—	—	—	—	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	—	—	—	—
	±10 (N)	—	—	—	—	—	—	—	—
	±25 (P)	—	—	—	—	—	—	—	—
	±50 (Q)	—	—	—	—	—	—	—	—
Maximum voltage	150V				200V				
Operating temperature	-55°C~155°C				-55°C~155°C				
Packaging	5,000pcs CodeT5				CodeT5				


\*1 Depending on customer's reliability requirements, power rating between high power and regular power can be selected.  
· Contact us for RG3225 with 1/2W rated power.

## Reliability characteristics


Item	Test Method	Specification: drift limits for each power rating						(Typical)
		Low		Regular		High		
		≤47Ω	≥47Ω	≤47Ω	≥47Ω	≤47Ω	≥47Ω	
Short time Overload	Applied voltage : 2.5 times. Test duration: 5 seconds. (When maximum operating voltage: 2 times or less)	±0.10%	±0.05%	±0.10%	±0.05%	—	±0.10%	±(0.01%)
Load Life	Test temperature : 85°C (When high voltage : 70°C). Applied voltage : rated voltage. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.01%)
Moisture load life	Test condition: 85°C, 85% RH. Applied power : 1/10 rated power. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.05%)
Temperature Cycle	Repeat 1000 cycle as follow : -55°C (30 min.)/Room Temp.(2 min.) / +125°C (30min.)/Room Temp.(2min.)	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
High temperature Exposure	+155°C for 1000 hours with no load	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)

## 10000 hour reliability test data


### Life test

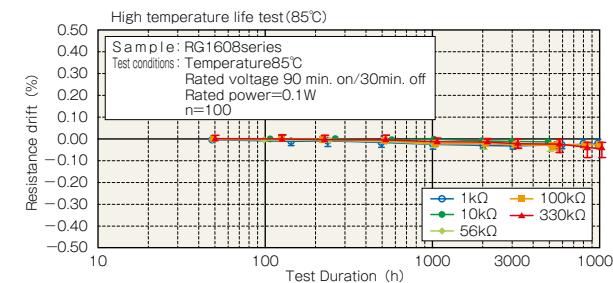


### High temperature high humidity bias test

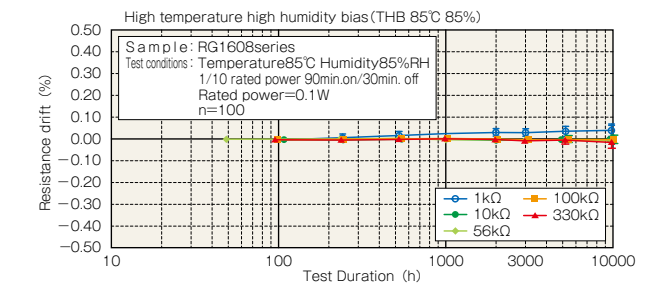


### Temperature cycle test

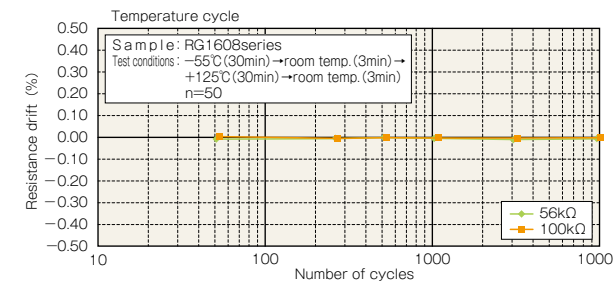


### High temperature exposure test

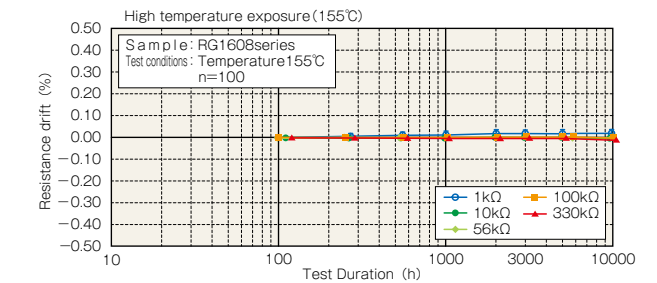


## Power derating characteristics

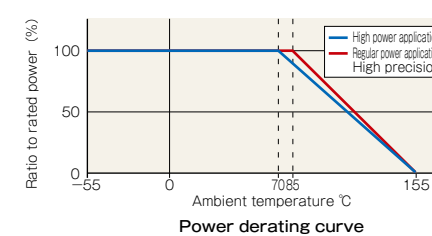

## Maximum pulse power limit

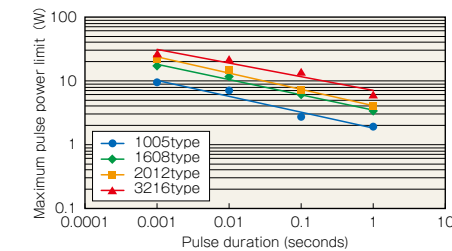

## Part numbering system

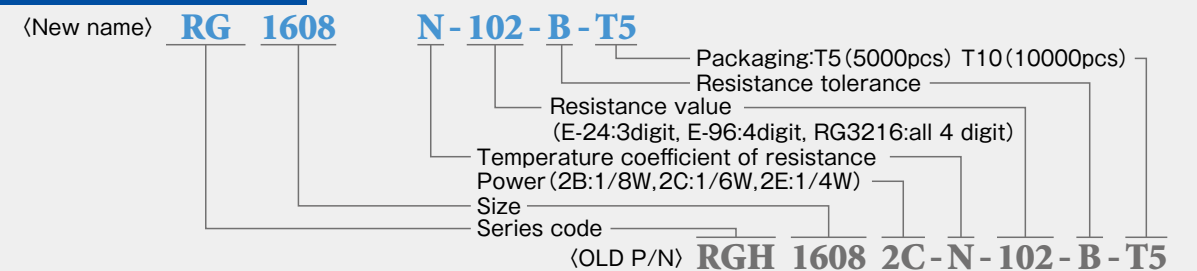

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thin Film Resistors - SMD category](#):*

*Click to view products by [Susumu manufacturer](#):*

Other Similar products are found below :

[7-2176089-6](#) [MCW0406MD1001DP500](#) [FCR1206J22R](#) [FCR1206J33R](#) [1-2176090-3](#) [1-2176089-6](#) [ERA-3EEB2742V](#)  
[NCSR250F4M50DTRGF](#) [2176089-1](#) [2176090-4](#) [2176091-3](#) [CMB02070X3000GB200](#) [CPA2512Q6R80FS-T10](#) [4-1625868-7](#) [5-1625868-9](#) [5-18022-5](#) [ERA-3EEB2671V](#) [CFR0W4J0220A2P](#) [P1206Y1804FNTA](#) [CPA2512E68R0FS-T10](#) [CPA2512Q4R70FS-T10](#) [8-2176091-9](#) [2-2176091-0](#) [NCSR150FR003DTRT3F](#) [NTR06B5832CTRF](#) [NCSR200JR002DTRF](#) [RSJ372NL](#) [NRC-S12F4751TRF](#) [8-1625868-1](#) [1-2176092-4](#) [4-2176093-9](#) [2176091-9](#) [RT1220P-101-M](#) [PLTU0805U1003LST5](#) [PLTU0603U2001LST5](#) [PLTU0805U1001LST5](#) [PLTU0603U4702LST5](#)  
[4-2176089-0](#) [8-2176091-0](#) [6-2176091-8](#) [3-2176090-3](#) [1-2176092-7](#) [7-2176092-6](#) [7-2176088-7](#) [PCNM2512E1502BST5](#) [2-2176094-5](#)  
[PCNM2512E3012BST5](#) [4-2176092-6](#) [3-2176091-4](#) [8-2176091-5](#)