


7 X 5 mm SMD CMOS CXO 7W SERIES




Features

- > Small SMD seam sealed clock crystal oscillator units.
- > High precision characteristic covering up to wide frequency range.
- > Designed for automatic mounting and reflow soldering.
- > Optionable stand-by function for output: Tri-state output.
- > Supply voltage range : 1.8 V ~ 5 V.
- > High stability, low jitter, low power consumption.
- > Main application : wireless communication, PC, and LCDM.
- > RoHS Compliant / Pb Free.

Electrical Specifications

| Item / Type | 7W | | |
|---------------------------------|--|-----------------------|---------------|
| Output Type | CMOS | | |
| Output Load | 15 pF | 15 pF , 30 pF | 15 pF , 50 pF |
| Oscillation Mode | Fundamental / 3rd Overtone | | |
| Supply Voltage | 1.8 V | 2.5 V , 2.8 V , 3.3 V | 5 V |
| Frequency Range | 1 ~ 170 MHz | | |
| Frequency Stability | ± 50 ppm (-10 ~ + 70 °C), or specify | | |
| Operating Temperature Range | - 40 ~ + 85 °C | | |
| Storage Temperature Range | - 55 ~ + 125 °C | | |
| Voltage Vol (Max.) / Voh (Min.) | 0.1 VDD / 0.9 VDD | | |
| Rise (Tr) / Fall (Tf) Time | 10 ns (1 ~ 10 MHz) , 7 ns (20 ~ 50 MHz) , 5 ns (> 50 MHz) Max. | | |
| Supply Current | 20 mA Max. | | |
| Symmetry | 40 ~ 60 % | | |
| Start-up Time | 10 ms Max. | | |
| Phase Jitter (12 KHz ~ 20 MHz) | 1 ps Max. | | |
| Aging (at 25 °C) | ± 3 ppm / year Max. | | |

Dimensions

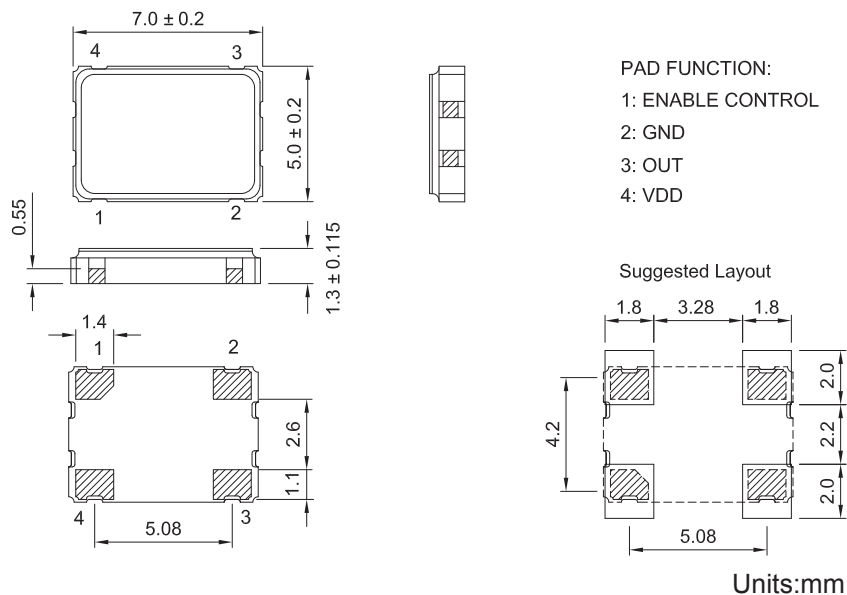

Remark : Specification subject to change without prior notice. Please confirm with our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [TXC Corporation](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XO37CTECNA10M](#) [XO57CRECNA16M](#) [XO57CTECNA3M6864](#) [XO57CTECNA4M9152](#) [DSC400-0333Q0032KE1-EVB](#)