



Form No.: QF-1274
Edition: 2

ISO9001 & ISO14001 & TS16949 CHILISIN ELECTRONICS CORP.

RoHS & Halogen Free & REACH Compliance.

SPECIFICATION FOR APPROVAL

Customer : 各廠家

Customer P/N:

Drawing No :

Quantity : 0 Pcs. Date : 2018/06/19

Chilisin P/N : MPB252012T-4R7M-NA2

SPECIFICATION ACCEPTED BY:	
COMPONENT ENGINEER	
ELECTRICAL ENGINEER	
MECHANICAL ENGINEER	
APPROVED	
REJECTED	

奇力新電子股份有限公司

Chilisin Electronics Corp
No. 29, Alley 301, Tehhsin Rd.,
Hukou, Hsinchu 303, Taiwan
TEL : +886-3- 599-2646
FAX : +886-3- 599-9176
E-mail : sales@chilisin.com.tw
http : //www.chilisin.com.tw

東莞奇力新電子有限公司

Chilisin Electronics (Dongguan) Co., Ltd.
No. 78, Puxing Rd., Yuliangwei Administration Area,
Qingxi Town, Dongguan City, Guangdong, China
TEL : +86-769-8773-0251~3
FAX : +86-769-8773-0232
E-mail : cect@chilisin.com.tw

奇力新電子(河南)有限公司

Chilisin Electronics (Henan) Co., Ltd.
XiuWu Xian, industry gathering area
JiaoZuo, Henan China
Postal Code:454350
TEL:+86-391-717-0682
FAX:+86-391-717-0666

蘇州奇益新電子有限公司

SUZHOU QI YIXIN Electronics Co., Ltd.
No.143,Song Shan Rd., Suzhou New District,
Suzhou,China
Postal Code:215129
TEL:+86-512-6841-2350
FAX:+86-512-6841-2356
E-mail : suzhou@chilisin.com.tw

Drawn by
陳瑞揚 ryan.chen


Checked by
溫美玲 ling

Approved by
陳瑞揚 ryan.chen

MPB252010T Series Specification

1 Scope: This specification applies to Multilayer power inductors

2 Part Numbering:

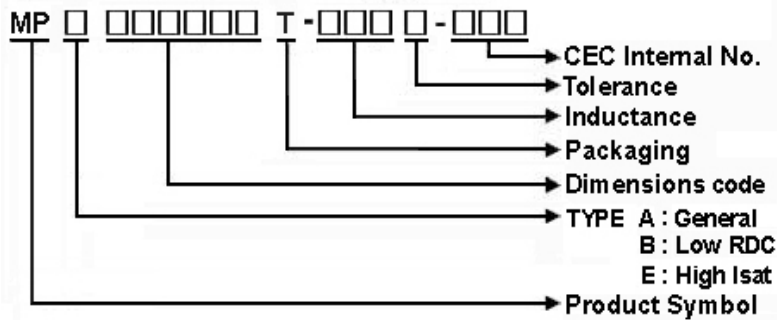

3 Rating:

Operating Temperature: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (Including self - temperature rise)

Storage Temperature: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (after PCB)

$-5^{\circ}\text{C} \sim 40^{\circ}\text{C}$, Humidity 40%~70% (before PCB)

4 Marking:




5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

MPB252010T Series Specification

6 Configuration and Dimensions:

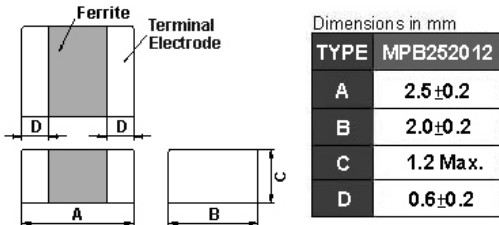

7 Electrical Characteristics:

Part No.	Inductance (μ H)	Test Freq.	RDC (Ω)±30%	Isat (mA)Max.	Irms (mA)Max.	Tolerance (±%)
MPB252012T-R47□-NA2	0.47	3MHz,200mV	0.04	1500	1800	20,30
MPB252012T-1R0□-NA2	1	3MHz,200mV	0.05	950	1600	20,30
MPB252012T-1R5□-NA2	1.5	3MHz,200mV	0.07	900	1400	20,30
MPB252012T-2R2□-NA2	2.2	3MHz,200mV	0.1	700	1200	20,30
MPB252012T-3R3□-NA2	3.3	3MHz,200mV	0.12	500	1100	20,30
MPB252012T-4R7□-NA2	4.7	3MHz,200mV	0.14	350	1000	20,30
MPB252012T-6R8□-NA2	6.8	3MHz,200mV	0.16	250	900	20,30


NOTE: □-tolerance M=±20% / T=±30%

1. Operating temperature range — 5 5 °C ~ 1 2 5 °C (Including self - temperature rise)
2. Isat for Inductance drop 30% from its value without current.
3. I rms for a 40 °C temperature rise from 25 °C ambient with current.

MPB252010T Series Specification

8 MPB252012T Series

8.1 Construction:

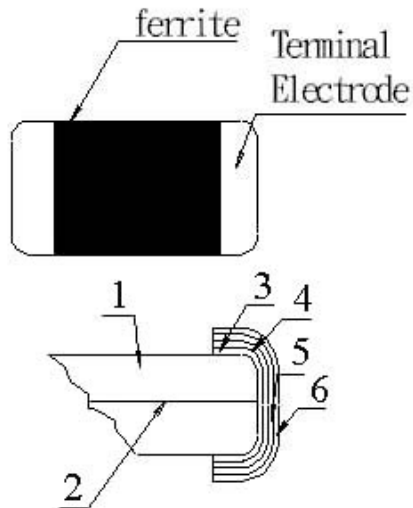


8.2 Material List:

No	Part	Material
1	Ferrite Substance	NiO-CuO-ZnO-Ferrite
2	Silver electrode	Ag
3	Silver electrode	Ag
4	Cu plating	Cu
5	Ni plating	Ni
6	Sn plating	Sn

MPB252010T Series Specification


7 Reliability Of Ferrite Multilayer power inductors

1-1. Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec <div style="text-align: right; margin-top: 5px;">  </div>
1-1-2	Vibration		Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Inductance: within $\pm 20\%$ of	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260 \pm 5°C Immersion Time: 10 \pm 1sec

1-1-4

1-1-5

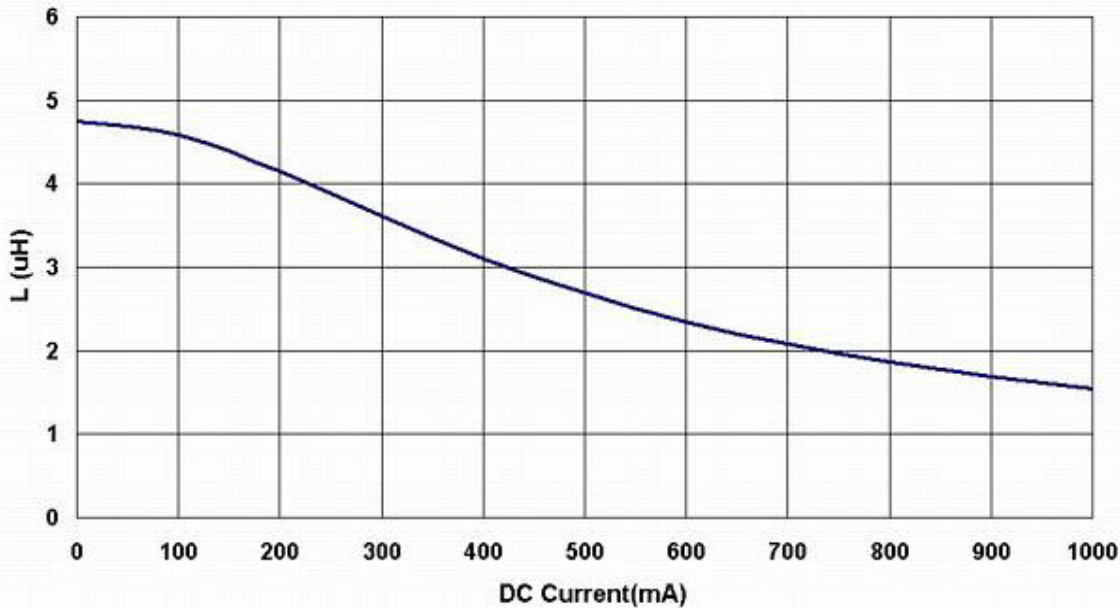

1-2.E


No

1-2-1

Time (min)	
	30
	3
	30
	3
	1 for 24hrs

1-2-2	Humidity Resistance		Temperature: 40 \pm 2°C Relative Humidity: 90 ~ 95% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-3	High Temperature Resistance		Temperature: 125 \pm 3°C Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-4	Low Temperature Resistance		Temperature: -55 \pm 3°C Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs

MPB252010T Series Specification

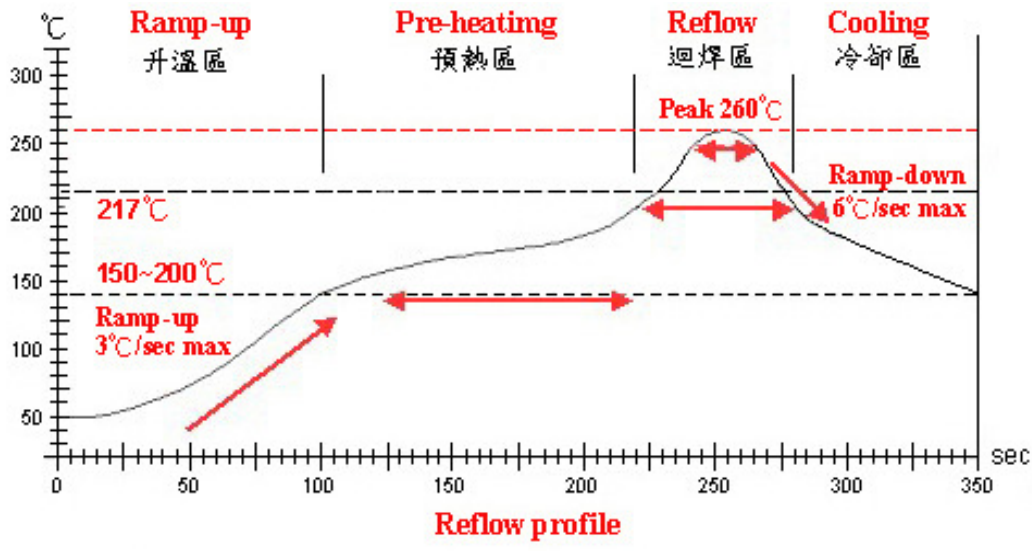

Lead-Free(LF) 標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	预热區 Pre-heating	迴焊區 Reflow	Peak Temp	冷却區 Cooling
溫度範圍 Temp.scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp. ~ 150°C
標準時間 Time spec.	—	60 ~ 180 sec	60 ~ 150sec	20 ~ 40 sec	—
實際時間 Time result	—	75 ~ 100 sec	90 ~ 120sec	20 ~ 35 sec	—

NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow

MPB252010T Series Specification

9 Packaging:

Chilisin

9.1 Packaging -Cover Tape

L	RDC	Isat	A	B	C	D
(uH)	(Ω)	(mA)	Max. m/m	m/m	m/m	m/m

4.7±20%

3MHz

5.14

5.15

5.14

5.15

5.11 0.114 OK

5.15 0.114 OK



3.1 0.12 OK

5.14 0.115 OK

5.14 **0.11** OK

5.12 0.114 OK

THICKNESS : 0.1(0.004)MAX.

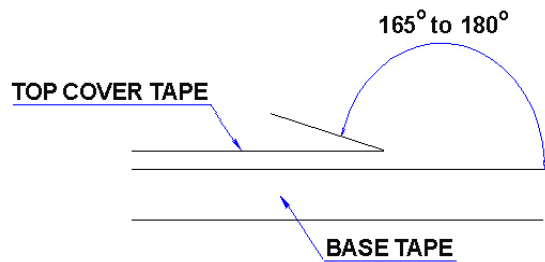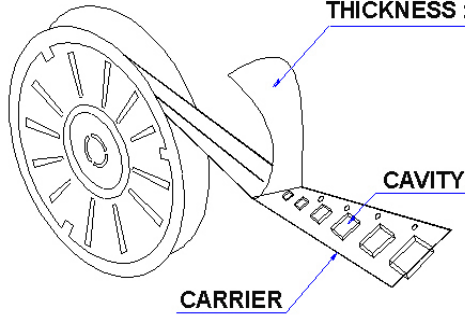

9.3 Reel Dimensions

L: Agilent E4991A+16197A

RDC: HP4338B

Isat : E4980A+42841A

Irms: Chroma DC Power Suppy 62006P-100-25

MPB252010T Series Specification

11 Packaging:

11.4 Tape Dimensions in mm


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

12 Recommendation

TYPE	PCS/REEL
MP201205	4000
MP201210	3000
MP201610	3000
MP252010	3000
MP252012	3000

13 Note:

- Please note the dimensions when you use the product.
- Do not use the product in a high temperature environment.
- All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
- Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
- The moisture sensitivity level (MSL) of products is classified as level 1.

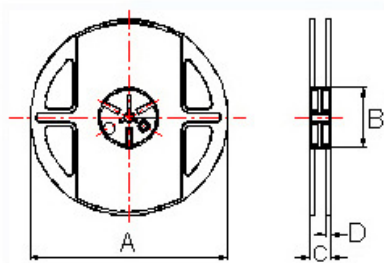


Dimensions in mm

TYPE	A	B	C	D
MP201205	178	60	12	1.5
MP201210	178	60	12	1.5
MP201610	178	60	12	1.5
MP252010	178	60	12	1.5
MP252012	178	60	12	1.5

to your specifications

MPB252010T Series Specification


14 Graph:




Tape Material

Carrier tape : Polycarbonate

Cover tape : Polyethylene



TYPE	A	B	T	W	P	F	K
MP201205	1.42	2.25	0.22	8	4	3.5	0.80
MP201210	1.45	2.25	0.22	8	4	3.5	1.04
MP201610	1.80	2.20	0.22	8	4	3.5	1.15
MP252010	2.25	2.80	0.25	8	4	3.5	1.35
MP252012	2.25	2.80	0.25	8	4	3.5	1.35

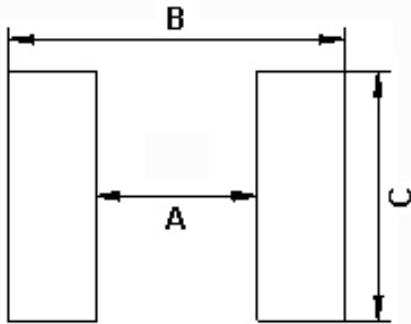

Dimensions in mm

TYPE	A	B	C
MP252012	1.3~1.9	2.7~3.5	2.0~2.6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Chilisin](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)