



0.8A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

FEATURES:


Glass Passivated Chip Junction
Reverse Voltage - 100 to 1000 V
Average Rectified Output Current- 0.8 A
High Surge Current Capability
Designed for Surface Mount Application

PINNING

| PIN | DESCRIPTION |
|-----|----------------------|
| 1 | Input Pin (~) |
| 2 | Input Pin (~) |
| 3 | Output Anode (+) |
| 4 | Output Cathode (-) |

MECHANICAL DATA

- Case: UMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 68mg 0.0022oz

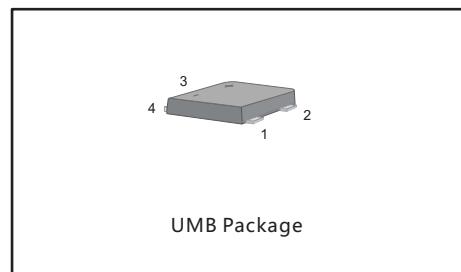

Maximum Ratings and Electrical characteristics






Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| Parameter | Symbols | UM1B | UM2B | UM4B | UM6B | UM8B | UM10B | Units |
|---|-----------------|------------|------|------|------|------|-------|--------------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Average Rectified Output Current at $T_A = 40^\circ C$ | I_o | 0.8 | | | | | | A |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) | I_{FSM} | 25 | | | | | | A |
| Forward Voltage per element $@I_F = 0.4A$ $@I_F = 0.8A$ | V_F | 1.0 1.1 | | | | | | V |
| Maximum DC Reverse Current $@T_A = 25^\circ C$ $@T_A = 125^\circ C$ | I_R | 5.0 100 | | | | | | μA |
| Typical Junction Capacitance (Note1) | C_J | 13 | | | | | | pF |
| Typical Thermal Resistance (Note2) | $R_{\theta JA}$ | 180 | | | | | | $^\circ C/W$ |
| Operating and Storage Temperature Range | T_j, T_{stg} | -55 ~ +150 | | | | | | $^\circ C$ |

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. P.C.B. mounted with 4x0.1x0.1"(4x2.54x2.54mm) copper pad areas.

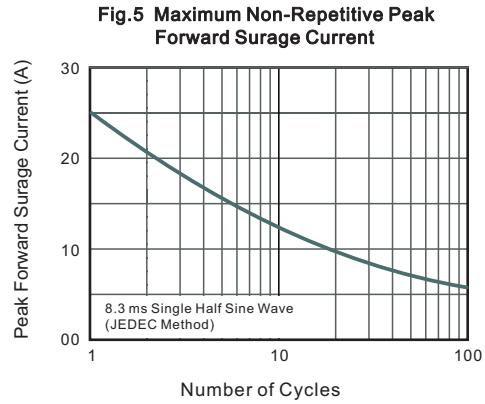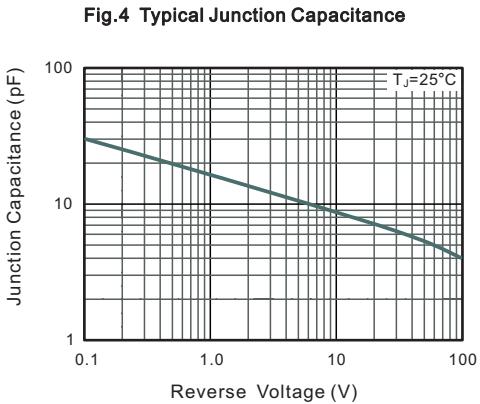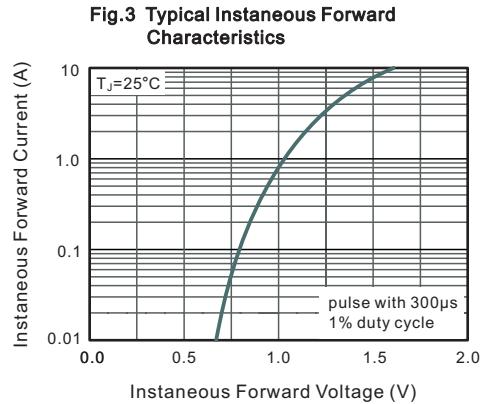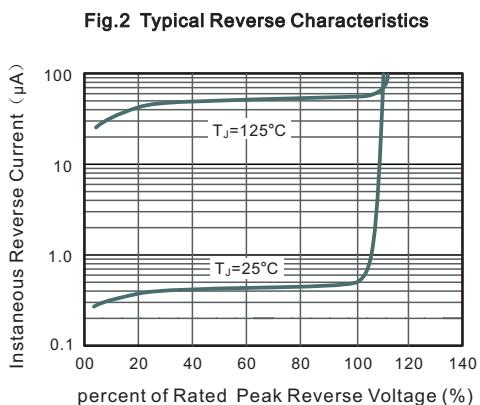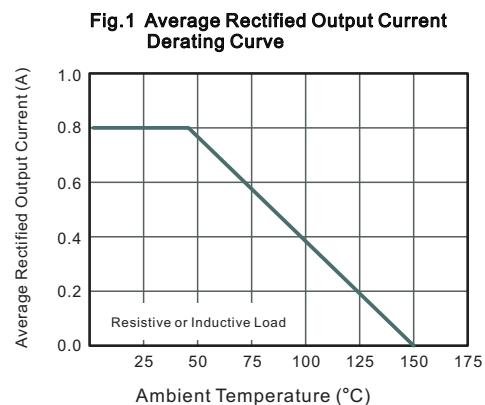




PACKAGE OUTLINE

Plastic surface mounted package; 4 leads


UMB

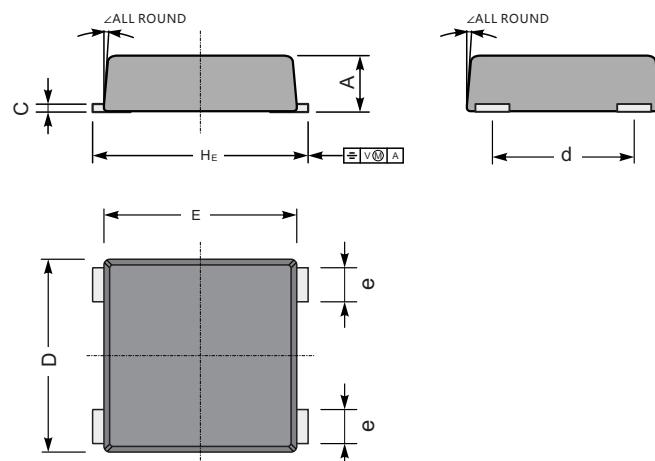

UMB mechanical data

| UNIT | | A | C | D | E | H _E | d | e | ∠ |
|------|-----|------|------|-----|-----|----------------|-----|-----|----|
| mm | max | 1.1 | 0.22 | 3.5 | 3.5 | 4.0 | 2.6 | 0.5 | 7° |
| | min | 0.96 | 0.15 | 3.3 | 3.3 | 3.6 | 2.4 | 0.4 | |
| mil | max | 44 | 8.7 | 137 | 137 | 276 | 103 | 20 | 7° |
| | min | 38 | 5.9 | 130 | 130 | 252 | 94 | 15 | |

The recommended mounting pad size

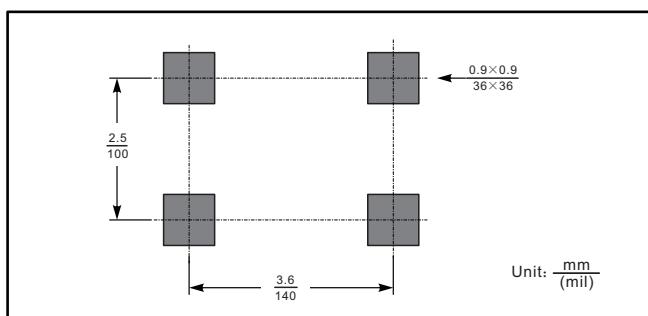

Marking

| Type number | Marking code |
|-------------|--------------|
| UM1B | UM1B |
| UM2B | UM2B |
| UM4B | UM4B |
| UM6B | UM6B |
| UM8B | UM8B |
| UM10B | UM10B |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Jingdao manufacturer](#):

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)