
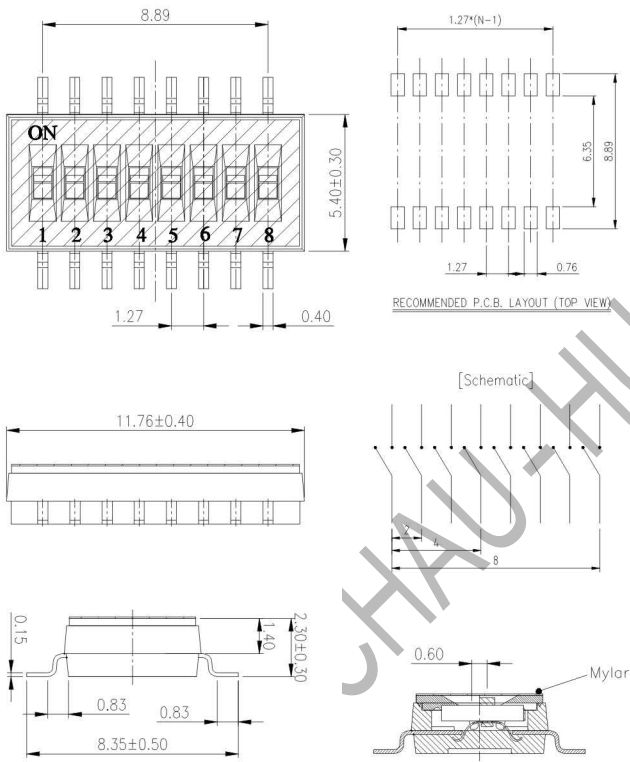


1.27mm Half-Pitch DIP SW

### HOW TO ORDER

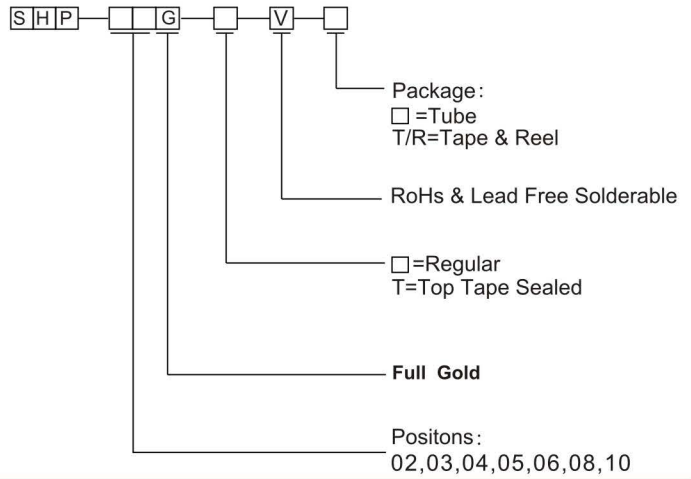

### Ratings:

- Contact Rating**
  - Switching : 25mA at 24VDC
  - Non-Switching : 100mA at 50VDC
- Contact Resistance**
  - Initial : 50M Ω Max
  - After life : 100M Ω Max
- Insulation Resistance : 100M Ω Max, Min at 100 VDC
- Dielectric Strength : 300VAC for 60 seconds
- Switch Capacitance : 5pF Max at 1MHZ
- Operation Temperature : -30°C to +85°C
- Storage Temperature : -40°C to +85°C

### Mechanical & Processing

- Operation Force : 500gf Max
- Mechanical Life : 1000 cycles Operations
- Resistance to Soldering : 270°C ±5°C for 10 second
- Packing: All DIP Switches Are Slipped In Standard IC Tubes Or Reel Package With All Poles In The " OFF "
- Package: 02,04,06,08,10 Tape&Reel:2000pcs

### Dimensions:

Gold/Gold plated G type P/N	Unit	
	mm	inch
SHP-02GT	4.12	0.16
SHP-03GT	5.41	0.21
SHP-04GT	6.66	0.26
SHP-05GT	7.95	0.31
SHP-06GT	9.20	0.36
SHP-08GT	11.74	0.46
SHP-10GT	14.28	0.56

### Material

Part Name	Material	Finished
Base	PPS UL94 V0	Black
Cover	PPS UL94 V0	Black
Actuator	Nylon UL94 V0	White
Movable	Beryllium	Gold/Tin
Terminal Contact	Brass	Gold/Tin
Terminal	Brass	Godl/Tin

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Challenge manufacturer](#):*

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)