



PINGWEI ENTERPRISE

MBR1020FCT THRU MBR10200FCT


10.0AMPS. SCHOTTKY BARRIER RECTIFIERS

FEATURE

- . High current capability
- . Low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed
260°C /10seconds, 0.25"(6.35mm)from case.

MECHANICAL DATA

- . Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- . Polarity: color band denotes cathode
- . Mounting position: any

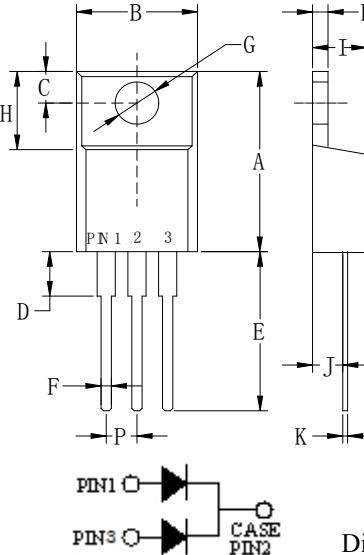

ITO-220AB

Dim	Min	Max
A	.571(14.5)	.610(15.5)
B	—	.406(10.3)
C	.110(2.80)	.126(3.2)
D	---	.162(4.1)
E	.512(13.0)	.551(14.0)
F	.020(0.5)	.031(0.78)
G	.114(2.9)	.138(3.5)
H	.268(6.8)	.291(7.4)
I	.162(4.1)	.185(4.7)
J	.110(2.8)	.126(3.2)
K	.020(0.5)	.028(0.7)
L	.097(2.46)	.113(2.86)
P	.89(2.25)	.113(2.85)

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	SYM BOL	MBR 1020 FCT	MBR 1040 FCT	MBR 1050 FCT	MBR 1060 FCT	MBR 1080 FCT	MBR 10100 FCT	MBR 10150 FCT	MBR 10200 FCT	units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	35	42	56	70	105	140	V
Maximum DC blocking Voltage	V_{DC}	20	40	50	60	80	100	150	200	V
Maximum Average Forward Rectified Current at $T_C = 100^\circ\text{C}$	$I_{F(AV)}$	10.0								A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	120.0								A
Maximum Forward Voltage at 5.0A DC	V_F	0.45	0.55	0.70		0.85	0.95			V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	I_R		0.5 40.0			0.1 10.0				mA
Typical Junction Capacitance (Note 1)	C_J		500			112				pF
Typical Thermal Resistance (Note 2)	R_{JC}		3.0							°C/W
Storage Temperature	T_{STG}			-55 to +150						°C
Operation Junction Temperature	T_J	-55 to +125			-55 to +150					°C

Note:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Case Mounted on Heatsink

RATING AND CHARACTERISTIC CURVES (MBR1020FCT THRU MBR10200FCT)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

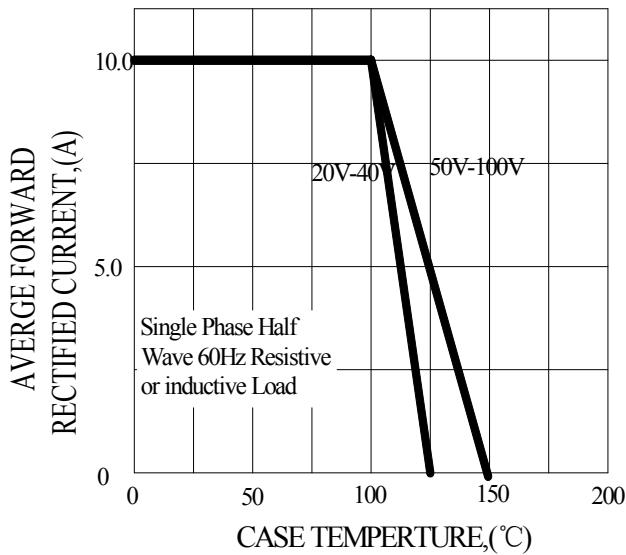


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

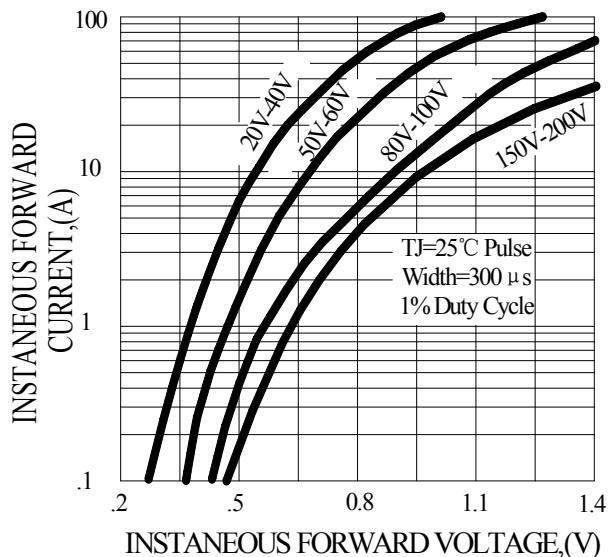


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


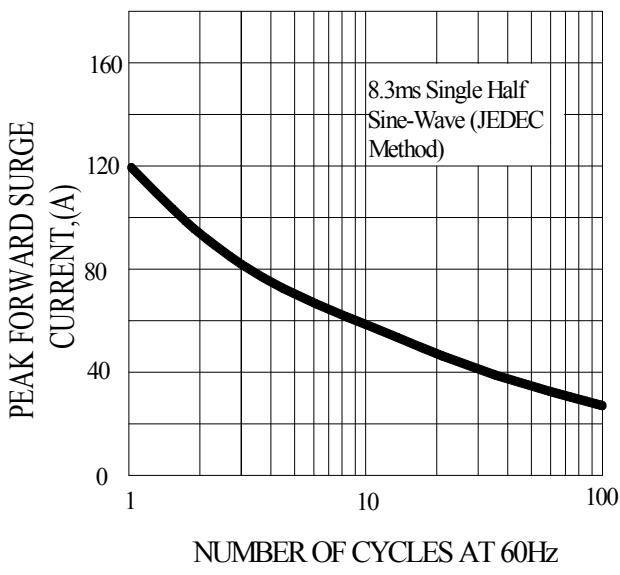


FIG.4-TYPICAL REVERSE CHARACTERISTICS

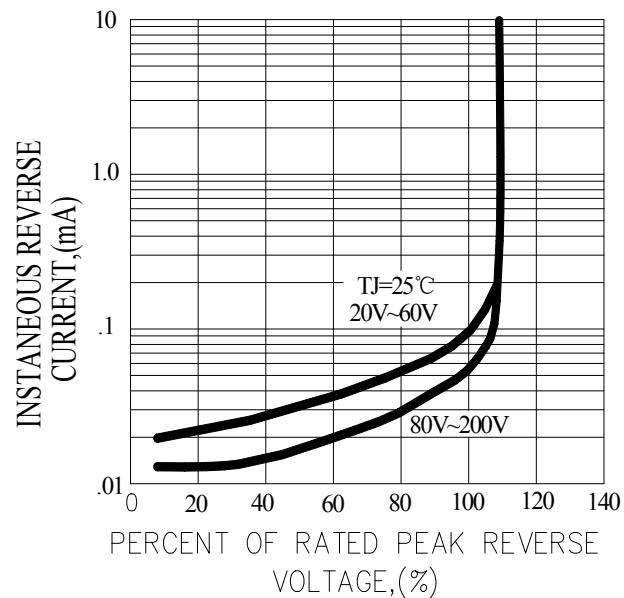

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Pingwei manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SK110-LTP](#) [SK154-TP](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#)