

International Rectifier

SCHOTTKY RECTIFIER
HIGH EFFICIENCY SERIES

PD-94186D

35CGQ150
35 Amp, 150V


Major Ratings and Characteristics

Characteristics	Limits	Units
I _{F(AV)}	35	A
V _{RRM} (Per Leg)	150	V
I _{FSM} @ t _p = 8.3ms half-sine (Per Leg)	400	A
V _F @ 17.5Apk, T _J =125°C (Per Leg)	0.8	V
T _J , T _{stg} Operating and storage	-55 to150	°C

Description/Features

The 35CGQ150 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of HiRel environments. It is packaged in the hermetic isolated TO-254AA package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Lightweight
- ESD Rating: Class NS per MIL-STD-750, Method 1020

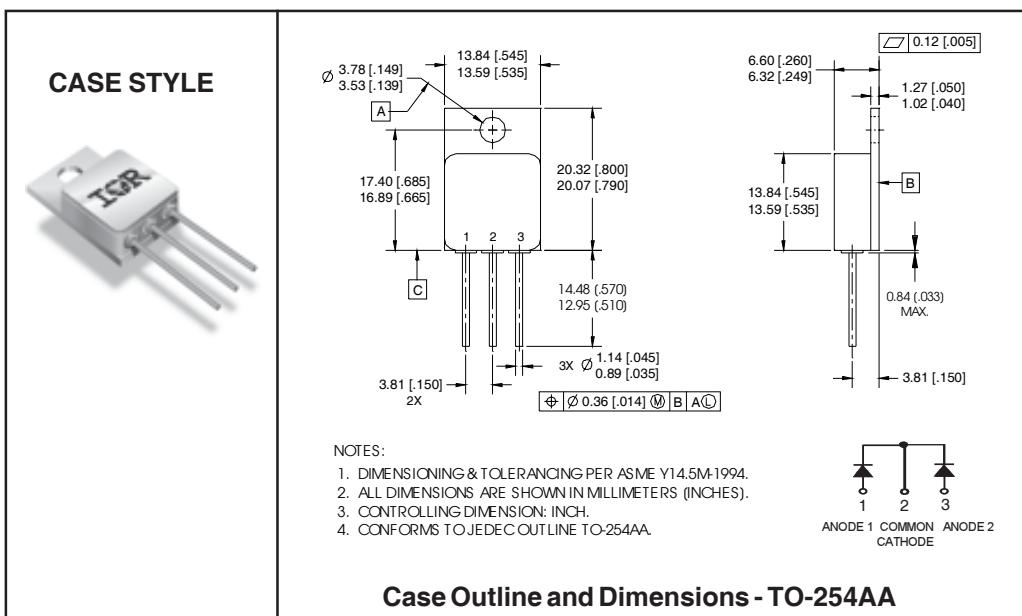

Voltage Ratings

Part number	35CGQ150		
V_R Max. DC Reverse Voltage (V) (Per Leg)	150		
V_{RWM} Max. Working Peak Reverse Voltage (V) (Per Leg)			

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 5	35	A	50% duty cycle @ $T_C = 115^\circ\text{C}$, square waveform
I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	400	A	@ $t_p = 8.3$ ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1 ①	1.05	V	@ 17.5A
	1.29	V	@ 35A
	0.93	V	@ 17.5A
	1.18	V	@ 35A
	0.80	V	@ 17.5A
	1.07	V	@ 35A
I_{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2 ①	0.1	mA	$T_J = 25^\circ\text{C}$
	16	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)	800	pF	$V_R = 5\text{V}_{\text{DC}}$ (1MHz, 25°C)
L_s Typical Series Inductance (Per Leg)	7.8	nH	Measured from anode lead to cathode lead 6mm (0.025 in.) from package

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	°C	
T_{stg} Max. Storage Temperature Range	-55 to 150	°C	
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	1.25	°C/W	DC operation See Fig. 4
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Package)	0.63	°C/W	DC operation
wt Weight (Typical)	9.3	g	
Die Size (Typical)	158X158	mils	
Case Style	TO-254AA		

① Pulse Width < 300μs, Duty Cycle < 2%

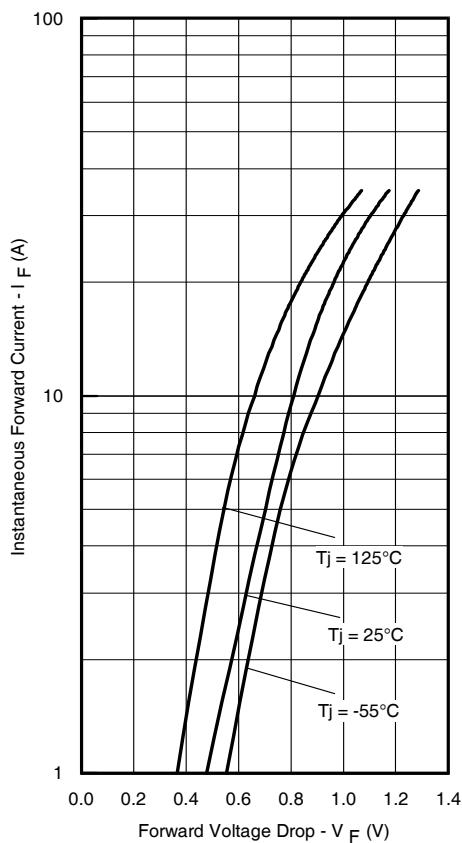


Fig. 1 - Max. Forward Voltage Drop Characteristics
(Per Leg)

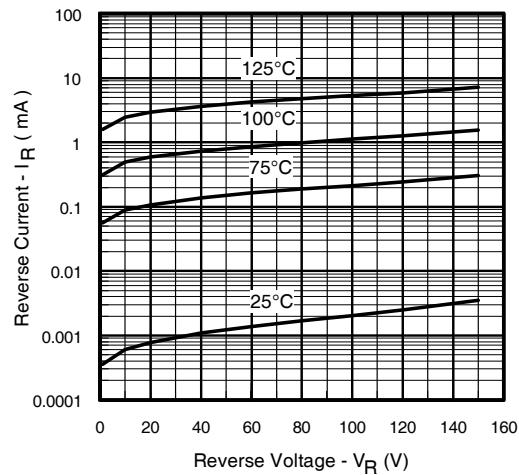


Fig. 2 - Typical Values of Reverse Current
Vs. Reverse Voltage (Per Leg)

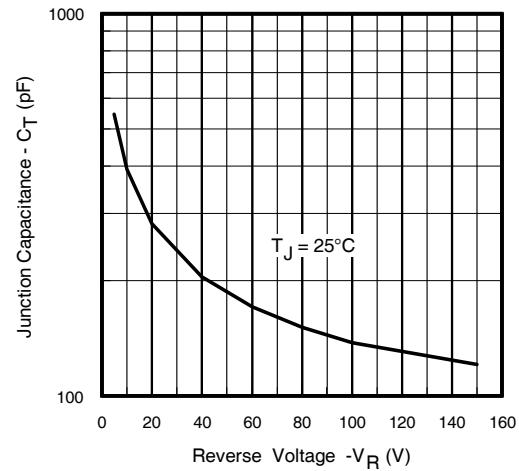


Fig. 3 - Typical Junction Capacitance Vs.
Reverse Voltage (Per Leg)

35CGQ150

International
IR Rectifier

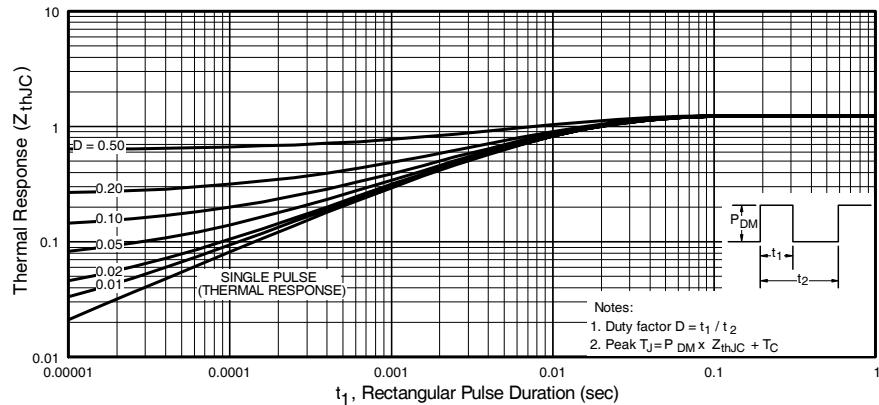


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

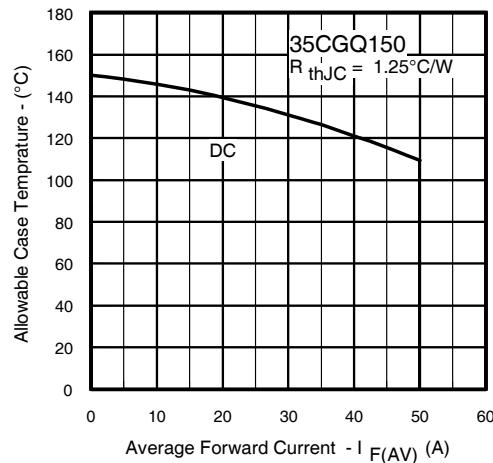


Fig. 5 - Max. Allowable Case Temperature Vs.
Average Forward Current (Per Leg)

International
IR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA Tel: (310) 252-7105

IR LEOMINSTER: 205 Crawford St., Leominster, Massachusetts 01453, USA Tel: (978) 534-5776

TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.

Data and specifications subject to change without notice. 03/2014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for infineon manufacturer:

Other Similar products are found below :

[TDA5250](#) [SPA07N60CFD](#) [TLE6209R](#) [EVALLEDILD6150TOBO1](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#)
[FD300R06KE3](#) [FF1200R17KE3_B2](#) [FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4_B11](#) [FP25R12KT4](#) [FP25R12KT4_B11](#)
[FS600R07A2E3_B31](#) [FZ1600R17HP4_B2](#) [FZ1800R17KF4](#) [FZ2400R17HE4_B9](#) [FZ600R65KE3](#) [DD1200S17H4_B2](#) [DD261N22K](#)
[DF1000R17IE4](#) [BAT 165 E6327](#) [BCP5616H6327XTSA1](#) [BCR 141W H6327](#) [BCR 162 E6327](#) [BCR402U](#) [BCR 555 E6327](#) [BCW 60C E6327](#)
[BDP950H6327XTSA1](#) [BFN 27 E6327](#) [BSD840NH6327XTSA1](#) [BSL308CH6327XTSA1](#) [BSL308PEH6327XTSA1](#) [BSM50GB60DLC](#)
[BSO080P03NS3EGXUMA](#) [BSP321PH6327XTSA1](#) [BSP372NH6327XTSA1](#) [BSP716NH6327XTSA1](#) [BSR802NL6327HTSA1](#)
[BSZ110N08NS5ATMA1](#) [BTF3050TE](#) [BTM7811KAUMA1](#) [IPD50N04S4-08](#) [IRPLHID2A](#) [ISP772TFUMA1](#) [KIT_TC1791_SK](#)
[KIT_XMC45_AE4_002](#) [KIT_XMC4x_COM_ETH-001](#) [EVALM113020584DTOBO1](#)